
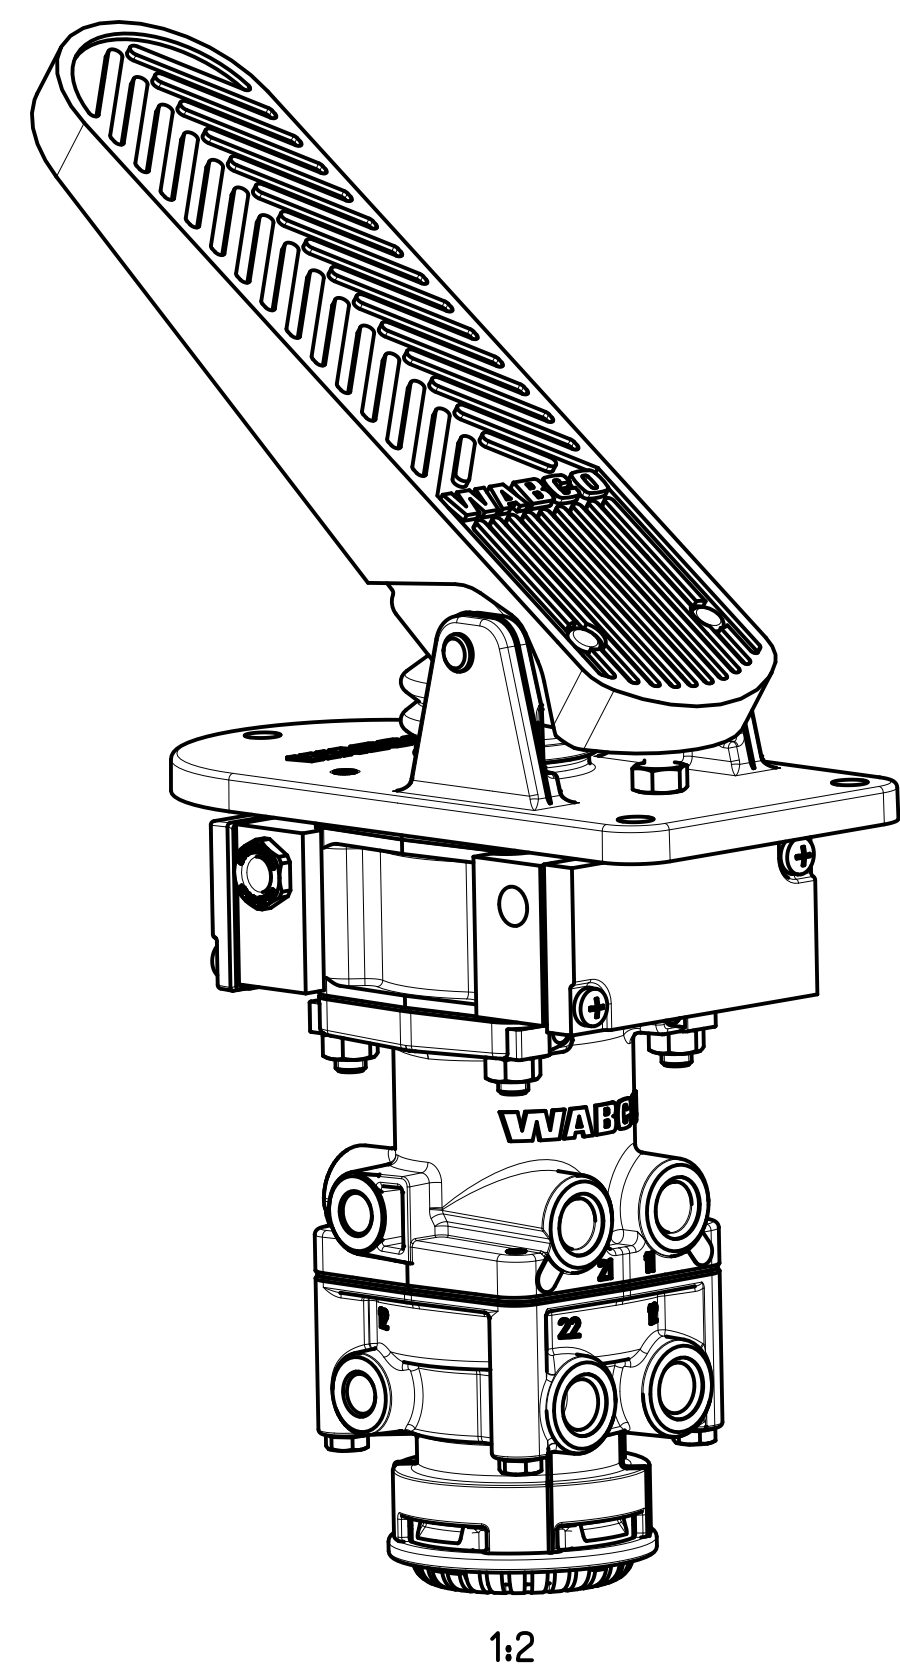


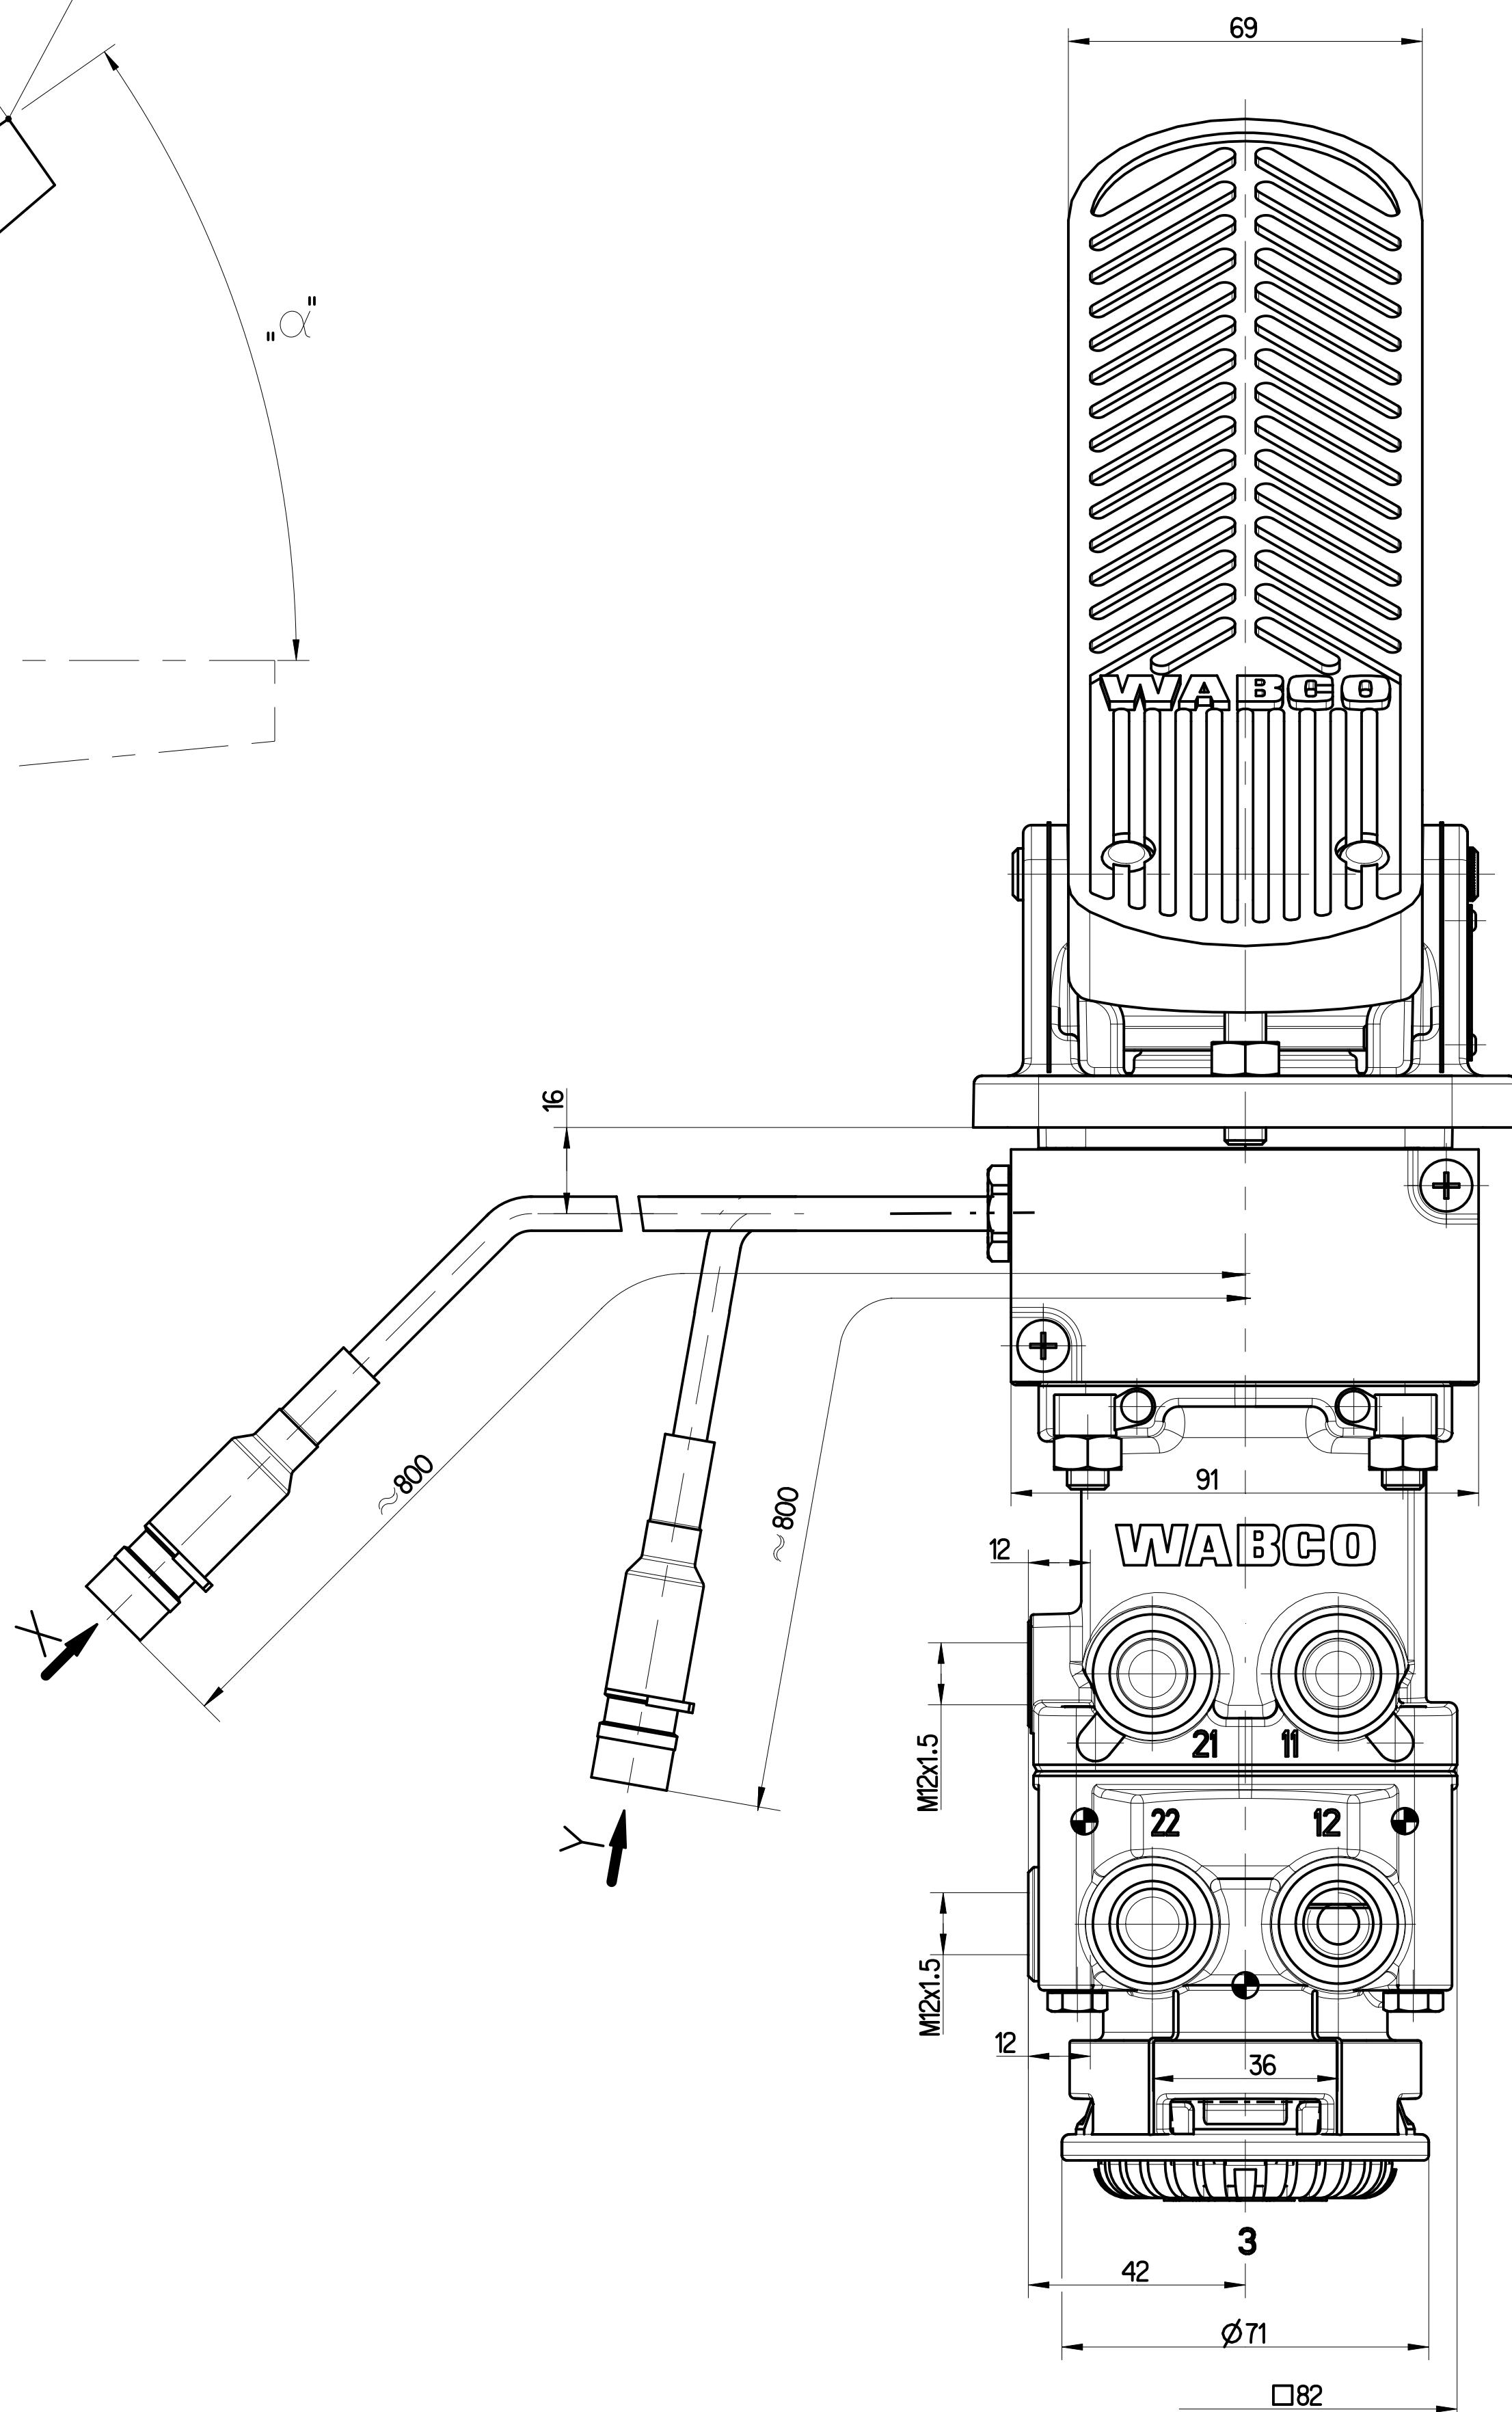

3 EXHAUST
ENTLUEFTUNG
ECHAPPEMENT
SCARICO

NOMINAL DIAMETER :
NENNWEITE : 78.5 mm² $\hat{=}$ Ø10 mm
DIAMETRE NOMINAL :
DIAMETRO NOMINALE:

$p_e \text{ MAX.} = 8.5 \text{ bar}$

(TEMPORARILY :
(KURZZEITIG : p_e MAX.= 10 bar)
(DE COURTE DUREE :
(BREVE TEMPO SOLO :



THERMAL RANGE OF APPLICATION :
THERM. ANWENDUNGSBEREICH : -40°C . . . +80°C
GAMME D'APPLICATION THERMIQUE:
CAMPO DI APPLICAZIONE TERMICA:

INSTALLATION POSITION: EXHAUST SHOWN AT BASE (AXIS CENTRE OF THE
DEVICE DEVIATES MAX. 45° FROM VERTICAL)
EINBAUlage: ENTLUEFTUNG NACH UNTEN (MITTELACHSE DES GERÄTES MAX. 45° VON DER
SENKRECHTEN ABWEICHEND)
POSITION D'INSTALLATION: ÉCARTEMENT VERS LA BAS (ÉCART DE L'AXE MÉDIAN
DE L'APPAREIL PAR RAPPORT À LA VERTICALE: 45° MAX.)
POSIZIONE DI MONTAGGIO: SCARICO VERSO IL BASSO (DEVIATIONE ASSE APPARECCHIO
RISPETTO ALLA VERTICALE: MAX. 45°)

SWITCH LOAD I, II, III, IV	: AT 24 V -1 A (INDUCTIVE LOAD)
SCHALTERBELASTUNG I, II, III, IV	: BEI 24 V - 1 A (INDUKTIVE LAST)
CHARGE DU CONTACTEUR I, II, III, IV	: A 24 V - 1 A (CHARGE INDUCTIVE)
CARICO DELL'INSERTORE I, II, III, IV	: A 24 V - 1 A (CARICO INDUTTIVO)

TORQUE FOR CONNECTIONS:
ANZUGSMOMENT FUER EINSCHRAUBSTUTZEN:
COUPLE DE SERRAGE DES RACCORDS:
COPPIA DI SERRAGGIO DEI RACCORDI:

M12x1.5: M=MAX. 21 Nm
M16x1.5: M=MAX. 34 Nm

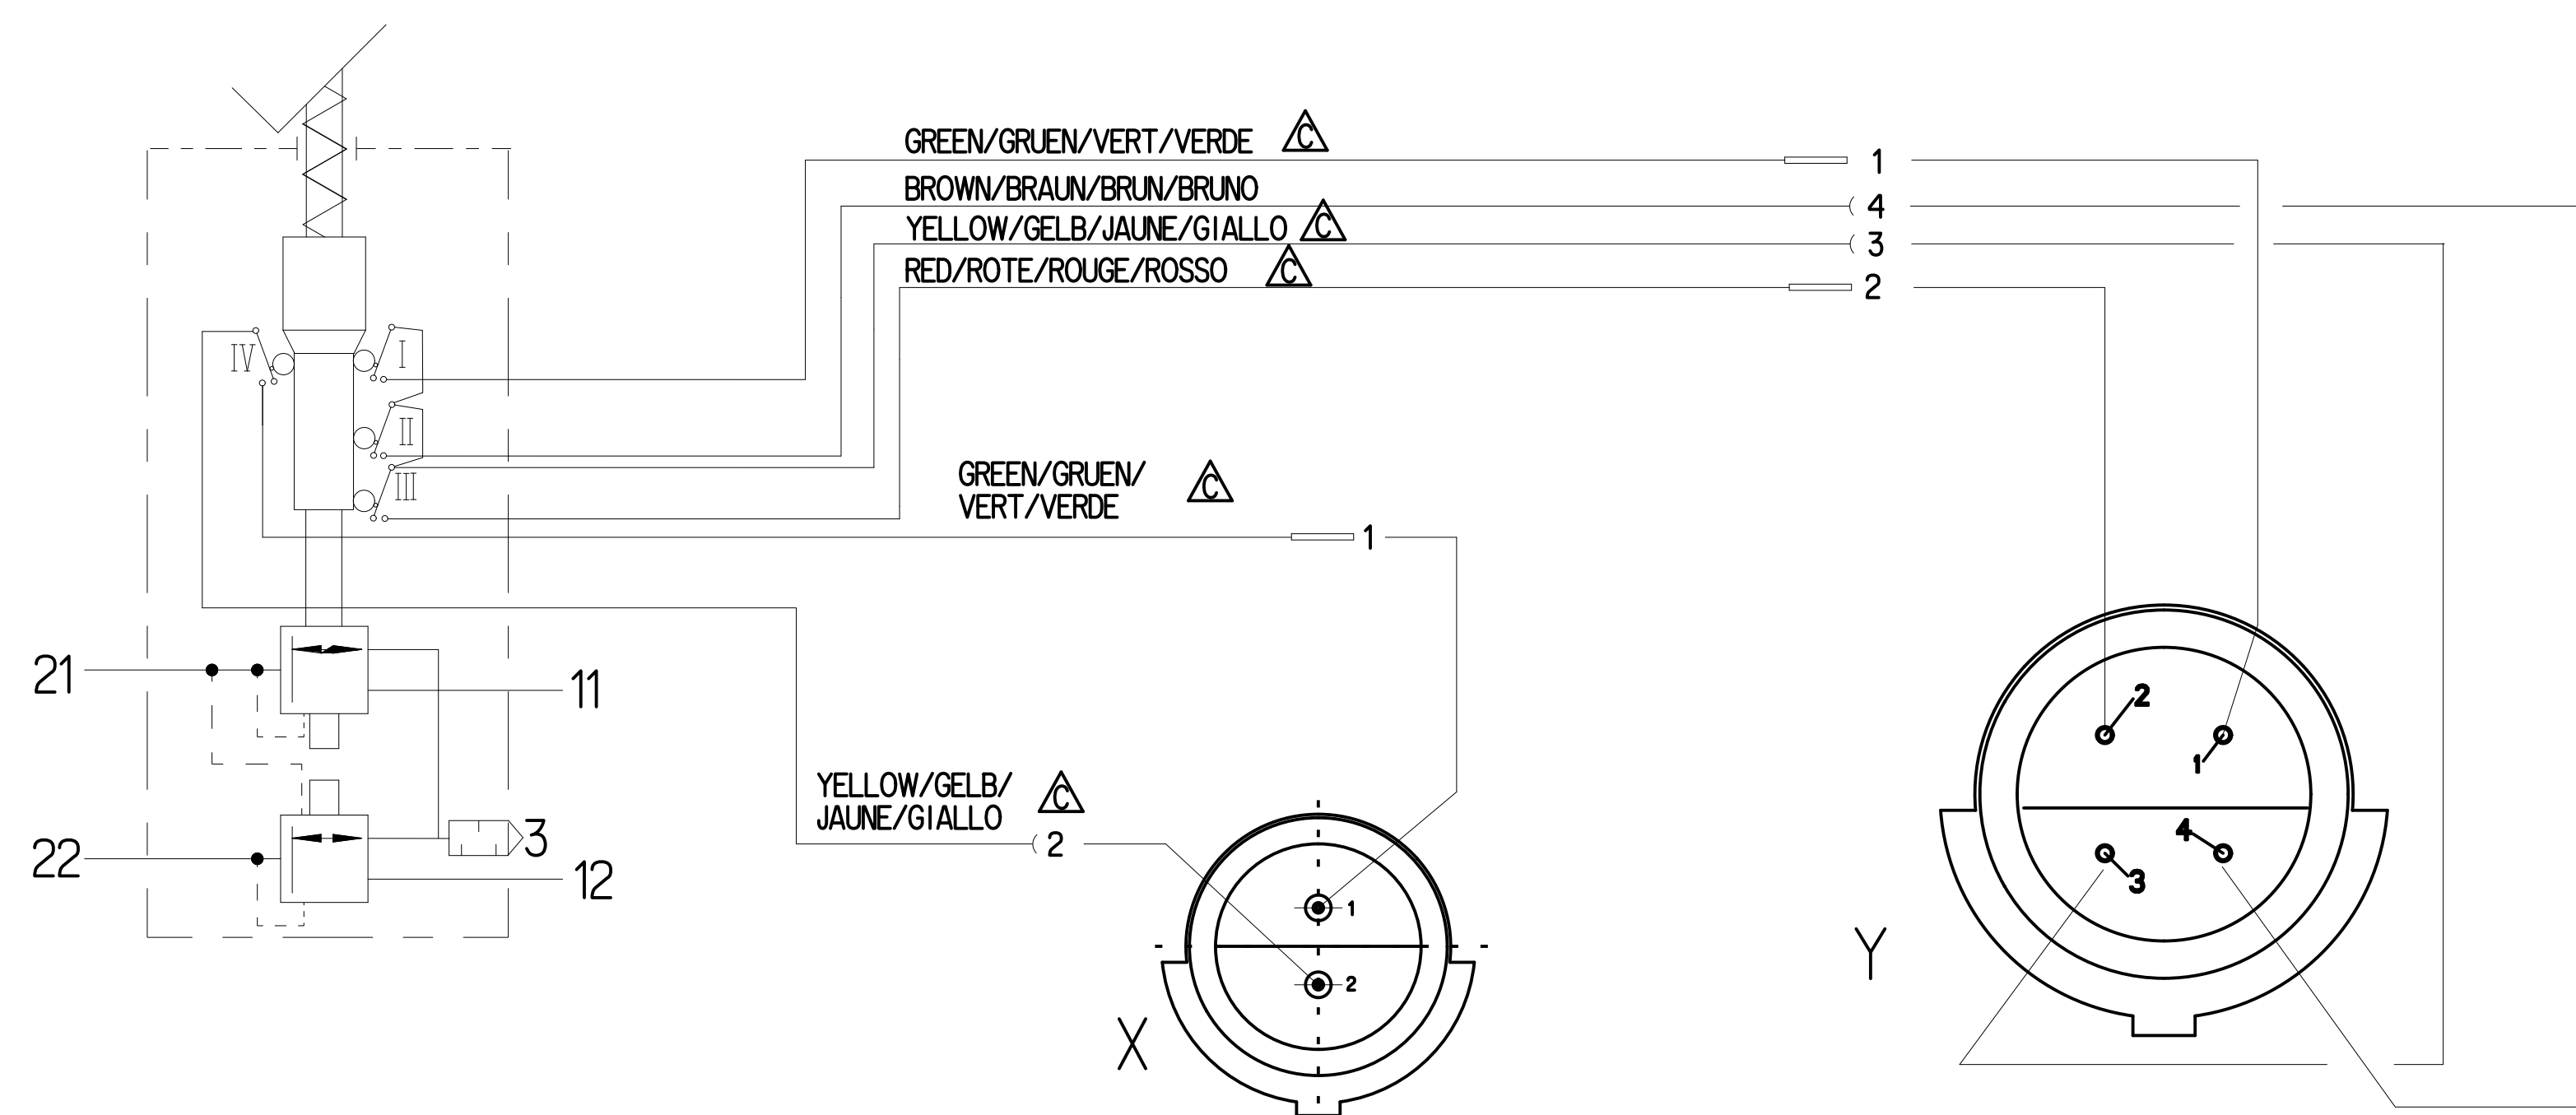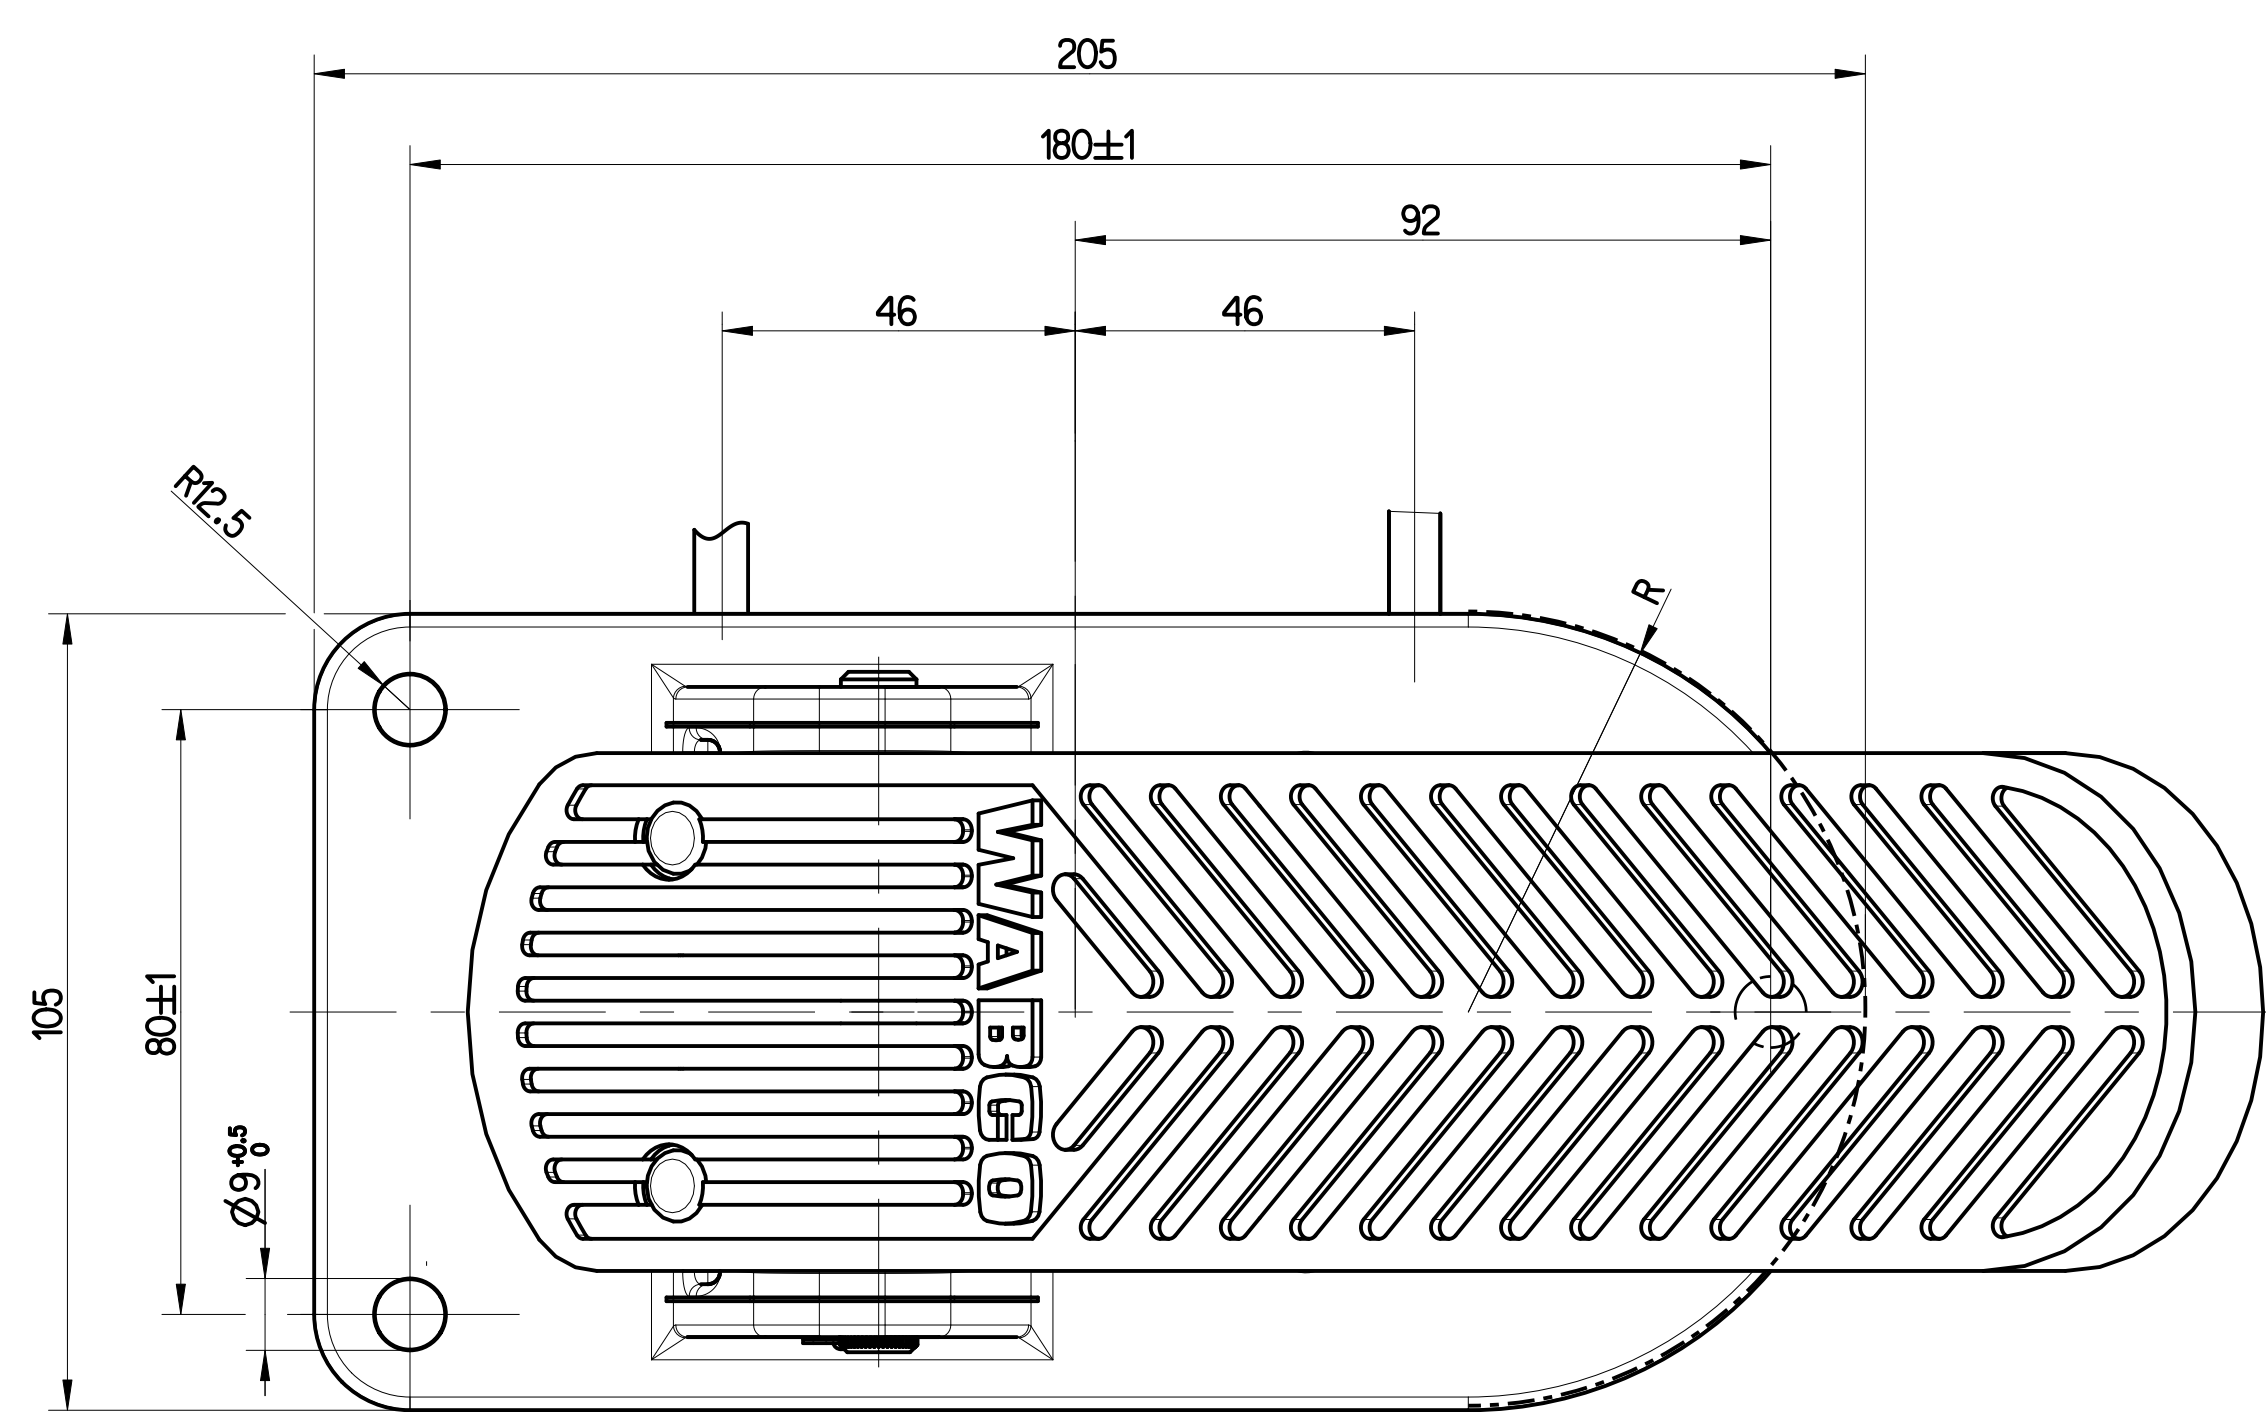[illegible]