

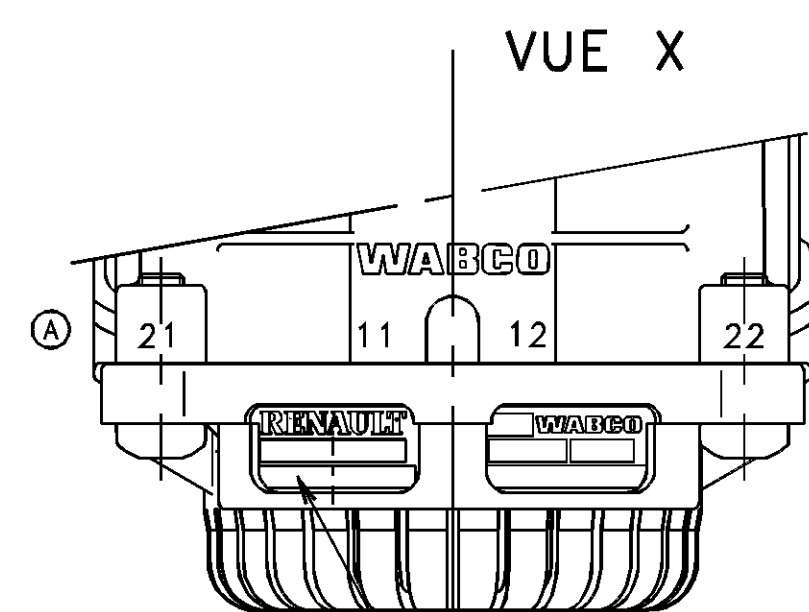
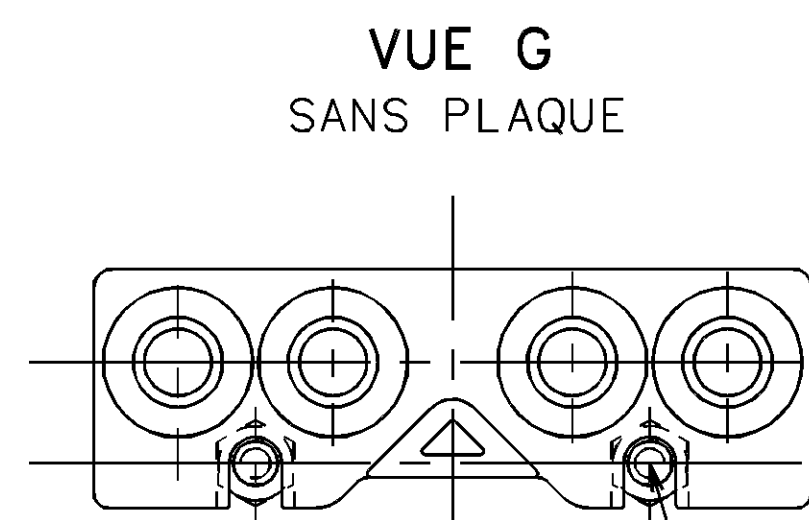
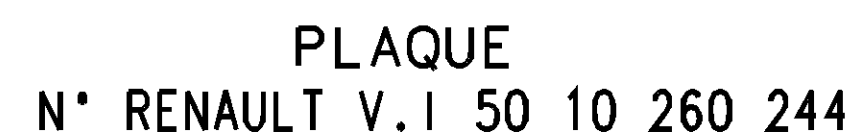
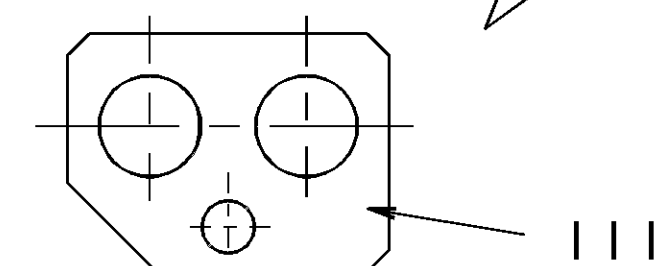
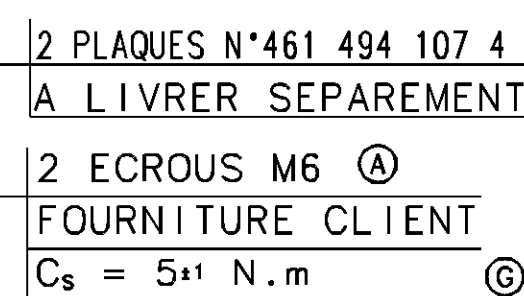
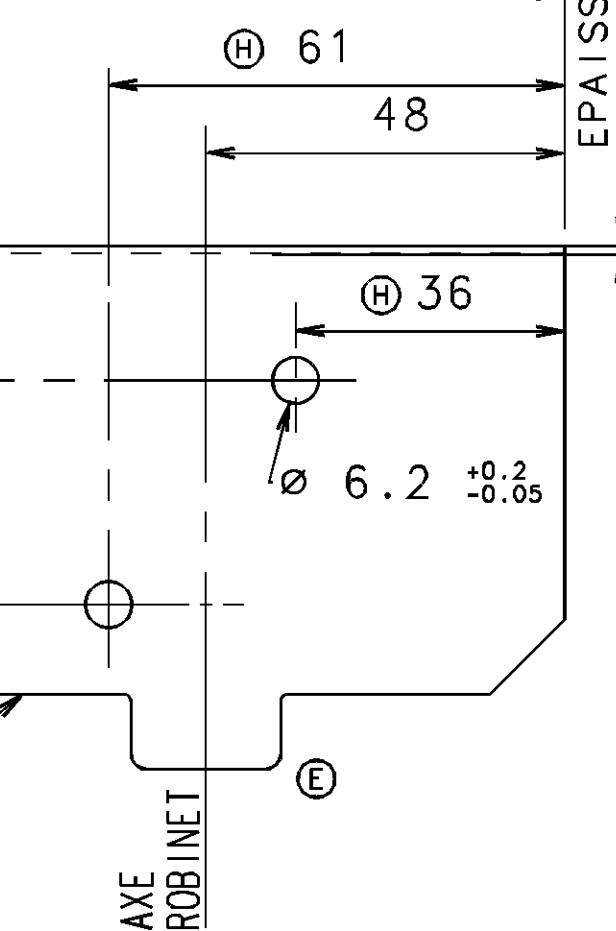
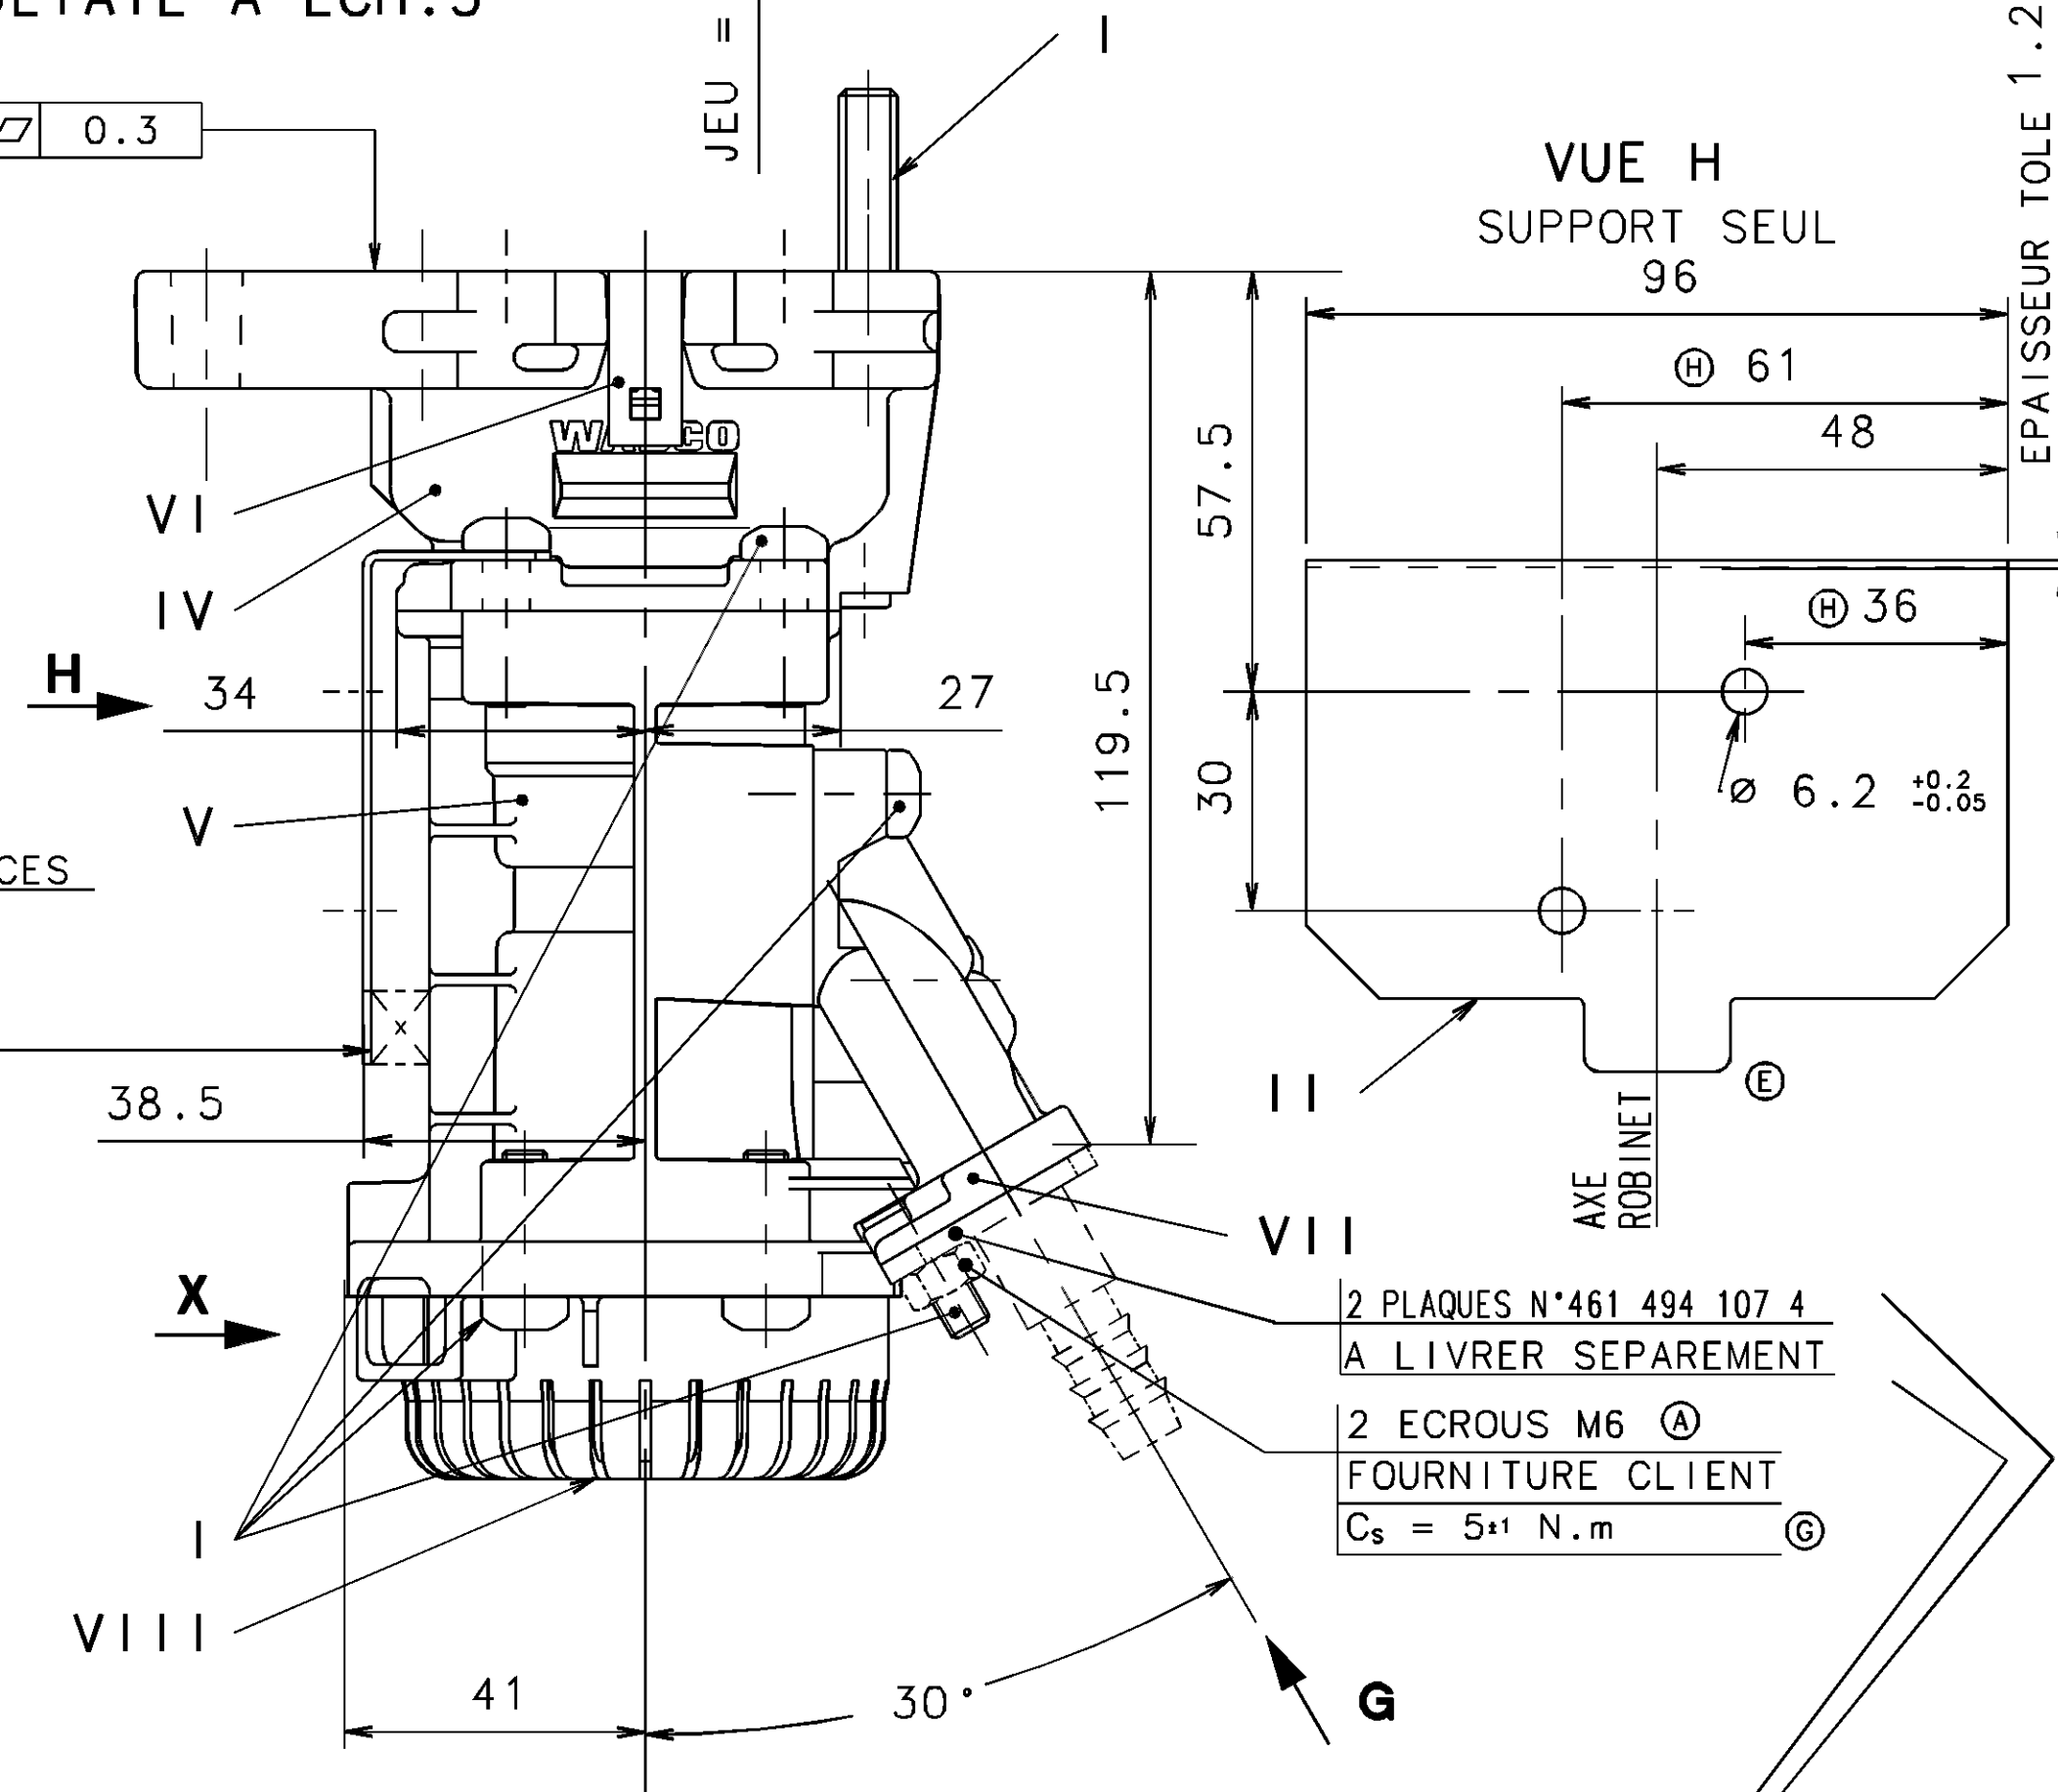



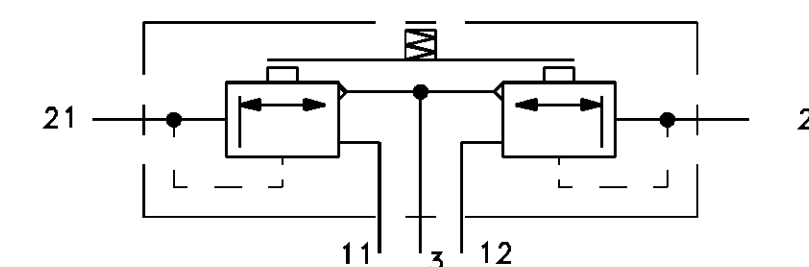

	MATERIAL	SURFACE PROTECTION
I	JED 051 M4/Fe	JED 378
II	JED 021 M3/Fe	JED 240.2
III	JED 021 M2/Fe	JED 240.2
IV	JED 029 M1/A1	JED 259
V	JED 004 M2	JED 260
VI	JED 462.3 /PBT	
VII	JED 682 /PPS	
VIII	JED 354.1/PA6-6	
IX	JED 045 M1/CR	

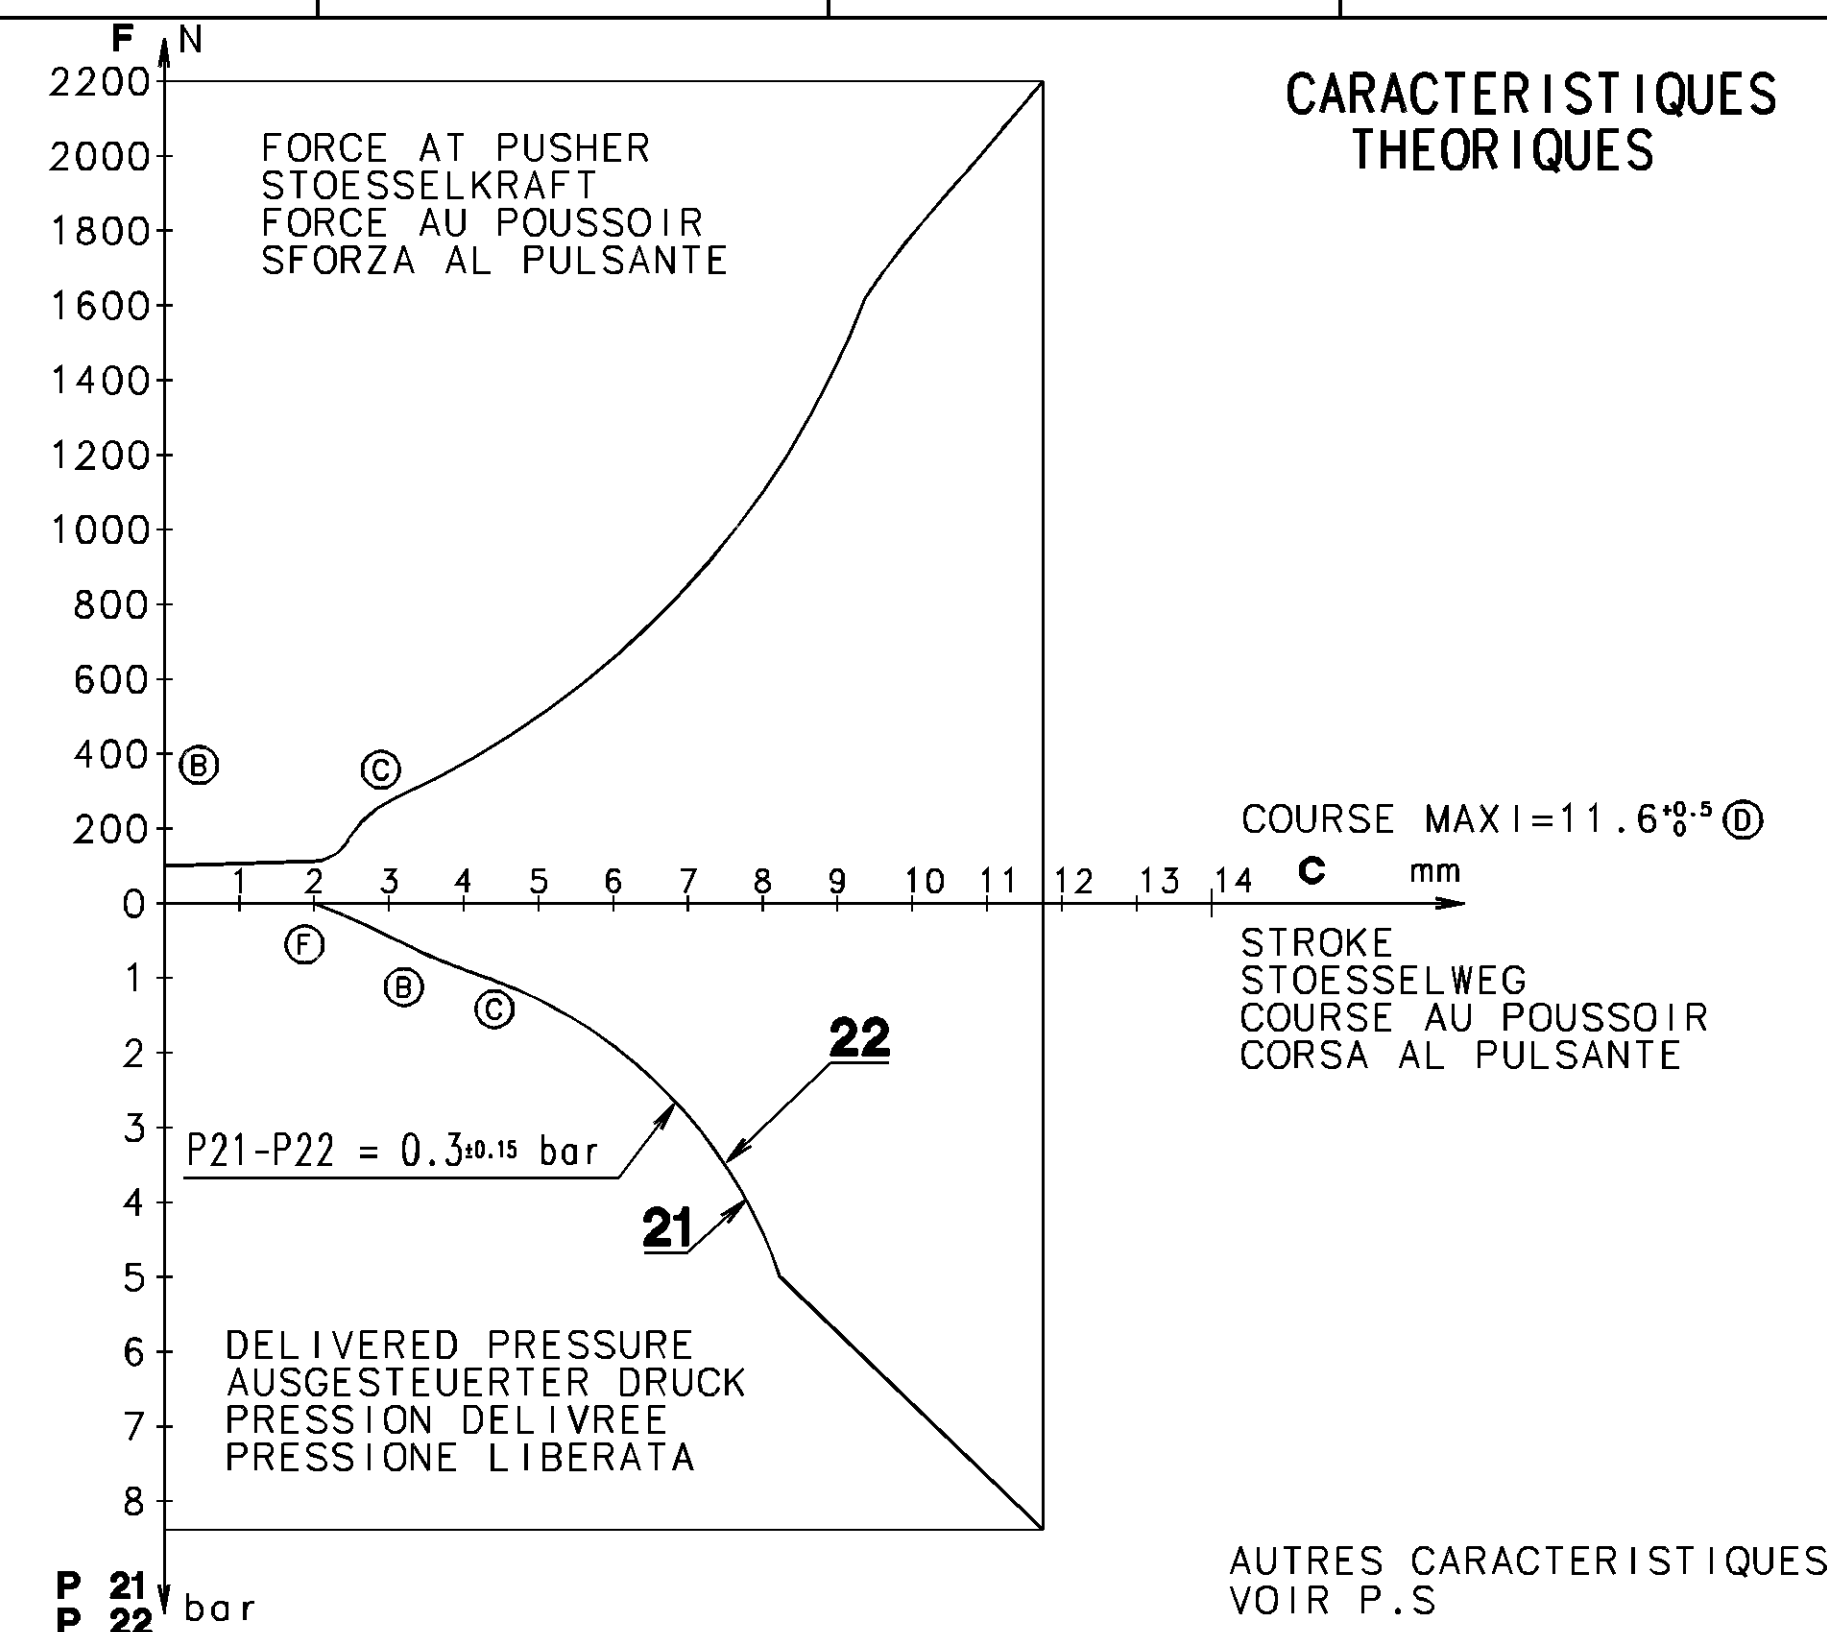


11 12	ALIMENTATION	
21 22	UTILISATION	
3	ECHAPPEMENT SILENCIEUX INTEGRE	REDUCTION DES BRUITS =72 dB(A) POUR P21/P22 = 8 bar

FLUIDE : AIR

PRESSION D'ALIMENTATION MAXI	: 12.5 ±0.5 bar
PRESSION D'UTILISATION	: 8 ^{+0.6} ₀ bar

TEMPERATURE D'UTILISATION : -40°C....+80°C

POSITION D'INSTALLATION : SILENCIEUX VERS LE BAS

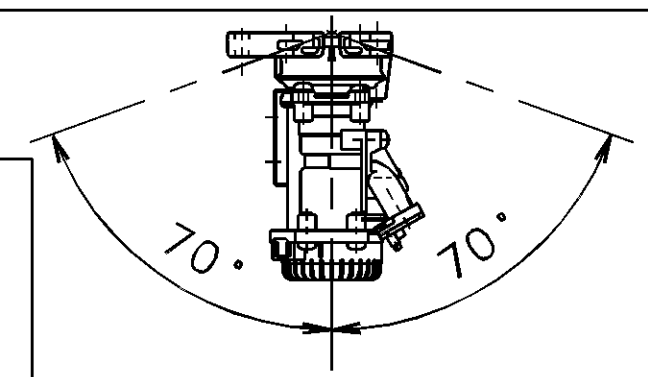

FURTHER TECHNICAL DATA SEE												L		COPYRIGHT		WABCO	
IDENTIFICATION NO.:												K		DATE		SIGNATURE	
CODE FOR DOCUMENT: 605										SHEET: TO		J		DRAWN		CHECKED	
GENERAL TOLERANCES										98308		2x (H) 98-12-09		11.01.95 BARBEAU		FOOT BRAKE VALVE	
CLASS										96150		3x (C) 96-06-05		11.01.95 BILON		ROBINET DE FREINAGE A PIED	
RANGE OF NOMINAL DIMENSIONS (± mm)										95 228		1x (E) 95-10-02		STANDARDIZATION			
1) ±50 ±180 ±180 ±400 ±400										95 184		5x (E) 95-08-02		11.01.95 94 253			
I 0,5 1,0 1,5 2,0										95 161		1x (D) 95-07-04		MASS		PRODUCT IDENTIFICATION NO.	
II 1,0 2,0 3,0 4,0										95 068		3x (C) 95-03-15		E 1.7 kg		1/1	
III 2,0 3,0 5,0 6,0										95 029		2x (B) 95-02-06		SIZE		T.R.I.	
TAPPED HOLES ACC. ISO 4039 / JED-152										95 021		4x (A) 95-01-25		A 1		210	
1) TOLERANCE CLASS APPLIED CROSSMARKED										DCN-NO.		REV.		DATE			
9										100mm		EXPORT		CODE		TYPE OF PRODUCT	