

1	2	3	4	5	6	7	8
A	B	C	D	E	F	G	H
M16x1,5	M22x1,5	9	Hex.27	11	~35	34-40 Nm	acc. ISO3583


G: recommended torque without lubrication (max. torque) respect max. torque of counter part

Cleanliness requirement:
No particles >1mm allowed according mandatory standard: JED-334 and JED-593

Material :
① CuZn
② PA6
③ TPE
④ inner components: PDM, EPDM, stainless steel

General Specification: JED-762 ; JED-271 ; JED-622 ; JED-220 ; JED-367

Engineering related agreements with Supplier have to be mentioned in the "Release of Supplier"

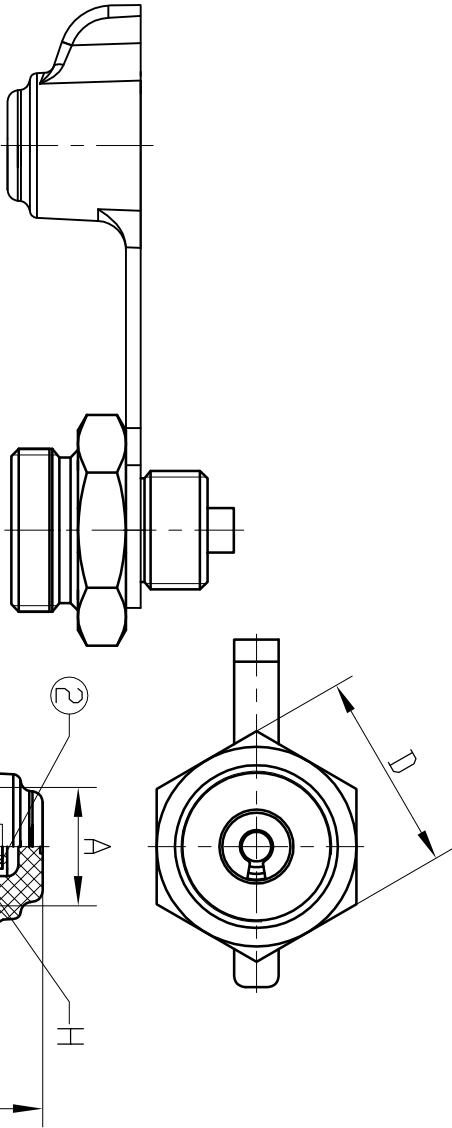

Working medium:

Max. working pressure:

Nominal working pressure:


Nominal diameter:

Thermal range of application:

Product specification:

Part specification:

Suitable for use in air brake systems for commercial vehicles



General Specification: JED-334-1, Size ISO 14405 LP									
Further Technical Data:									
Doc. Code:		Sheet:		To					
General Tolerances JED-261									
		Range of Nominal Dimensions (± mm)							
Class 1)	≤50	> 50	≤ 180	> 180	≤ 400	> 400	▽		
	0.5	1.0	1.5	2.0					
	1.0	2.0	3.0	4.0					
	2.0	3.5	5.0	6.5					
Fine	X						±3°		
Medium									
Coarse									
Tapped Holes acc.									
1) Tolerance Class Applied Crossmarked									
Copyright WABCO®									
Date		Signature							
2014-09-17		Drawn		Gadula					
2014-10-07		Checked		Kaufmann					
		Expert		Kaufmann					
		Kaufmann							
Mass		Scale		Material No.					
0.068 KG		1:1							
Size		CAD System							
A 3		Inventor				463 705 103 0			
				ECN-No.		Revision		Techn. Resp.	
				165443		C		5791	