





Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzarne il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituirà un evidente abuso e comporterà il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Toute Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Contravention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.


6 H11	+0.075 0
6 H13	+0.180 0
8 H11	+0.090 0
19.6 h11	-0.130 0
20 h11	0 -0.130

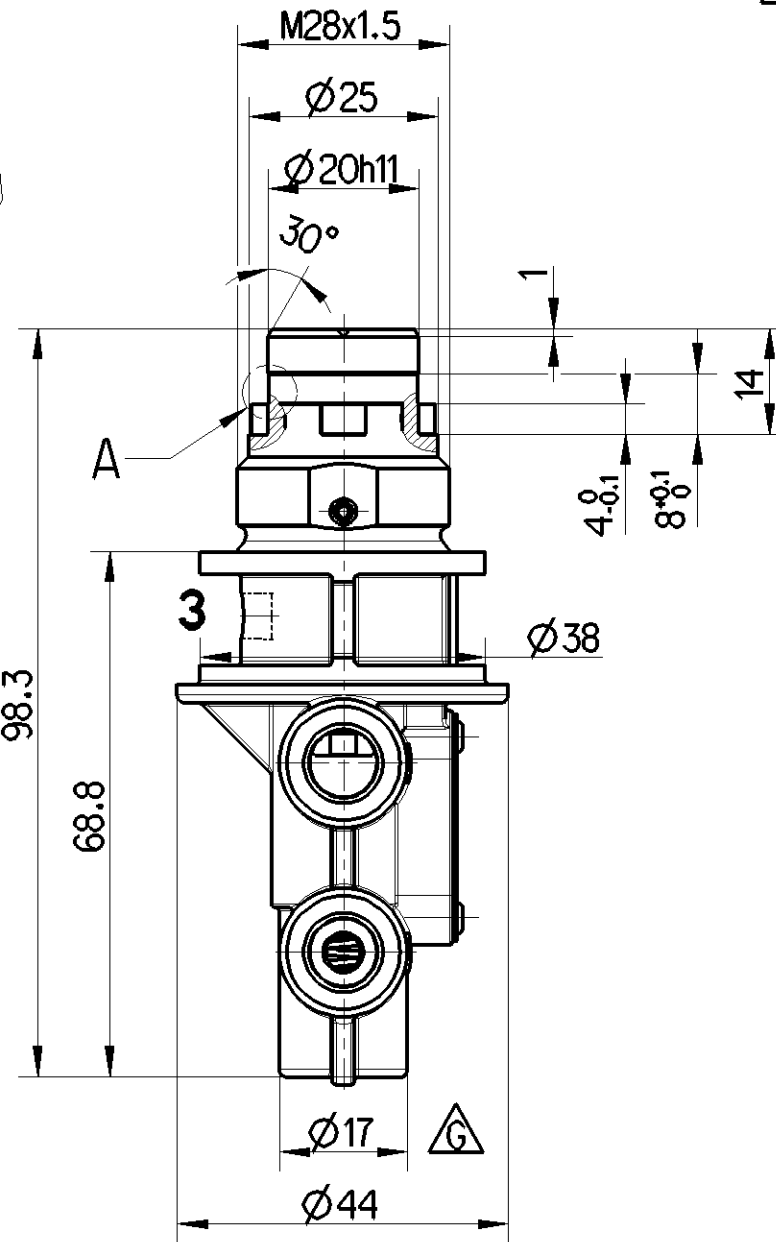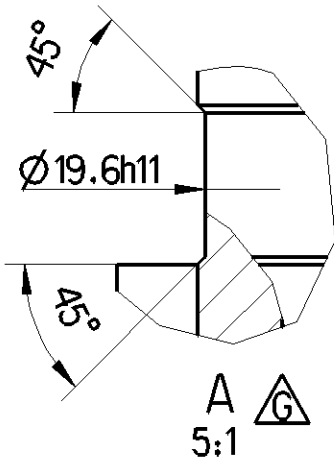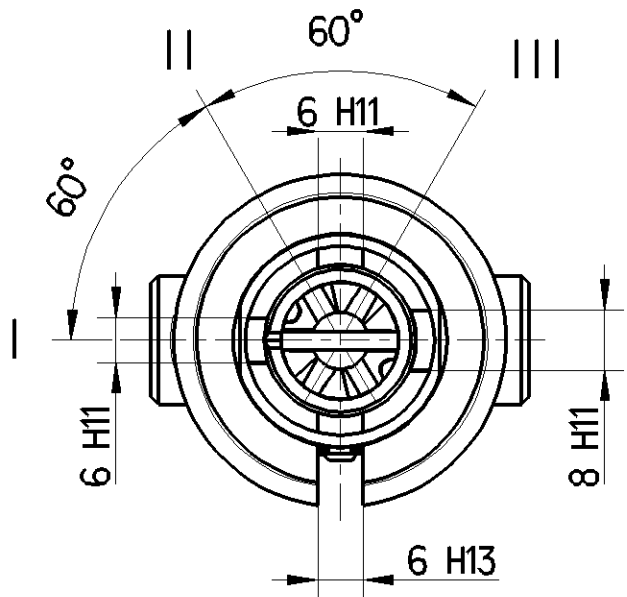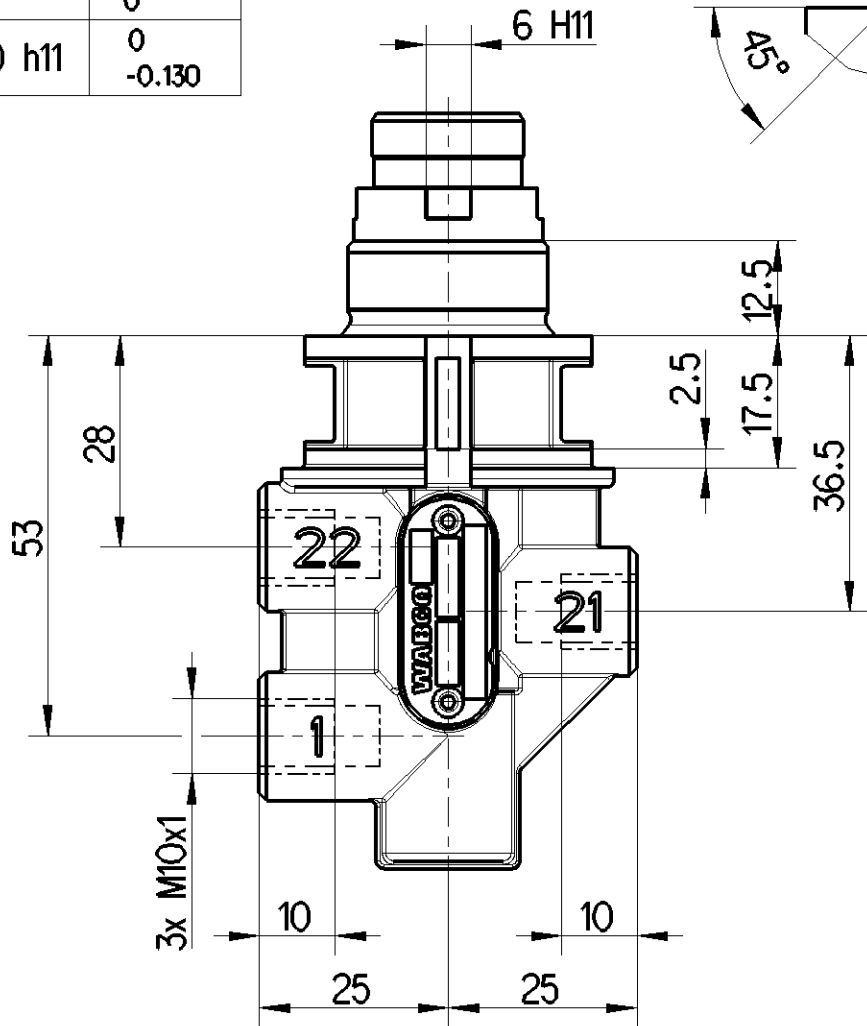

NOMINAL DIAMETER	2.5 mm
WORKING PRESSURE	pe = MAX. 10 bar
THERMAL RANGE OF APPLICATION	-25...+80°C
OPERATING TORQUE	MAX. 1.5 Nm
MEDIUM	COMPRESSED AIR (ACC. TO JED-848 DOC. CODE 008, REV.A)




PORTS	
1	ENERGY SUPPLY FROM RESERVOIRE
21, 22	DELIVERY OF ENERGY TO WORKING LINE
3	EXHAUST

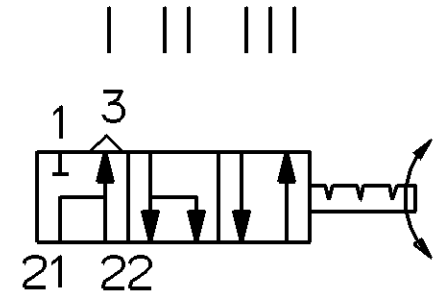

General Specification: ISO 8015, JED-334-1, Size ISO 14405 LP						
Further Technical Data:						
Doc. Code:			Sheet:		To	
General Tolerances JED-261						
Class 1)		Range of nominal dimensions in mm				
		≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	
Fine		±0.5	±1	±1.5	±2	
Medium	X	±1	±2	±3	±4	
Coarse		±2	±3.5	±5	±6.5	
Tapped Holes acc.						
1) Tolerance Class Applied Crossmarked						



Copyright ZF ®						
Date	Signature					
Drawn						
2023-07-25	Bajk					
Checked						
2023-07-25	Swiatek	4/3 DIRECTIONAL CONTROL VALVE				
Dimensions in mm						
Mass	Scale	Material No.		Date of first issue: 1973-07-20		
0.8 kg	1:1 (5:1)	463 037 001 0		Doc.Code	Language	Sheet
Size	CAD System			005	EN	1/1
A 3	CREO		ECN-No.	Revision	Techn. Resp.	Replacement for
			513946	5x G	5810	884 001 441 0



4/3 DIRECTIONAL CONTROL VALVE

463 037 001 0

