


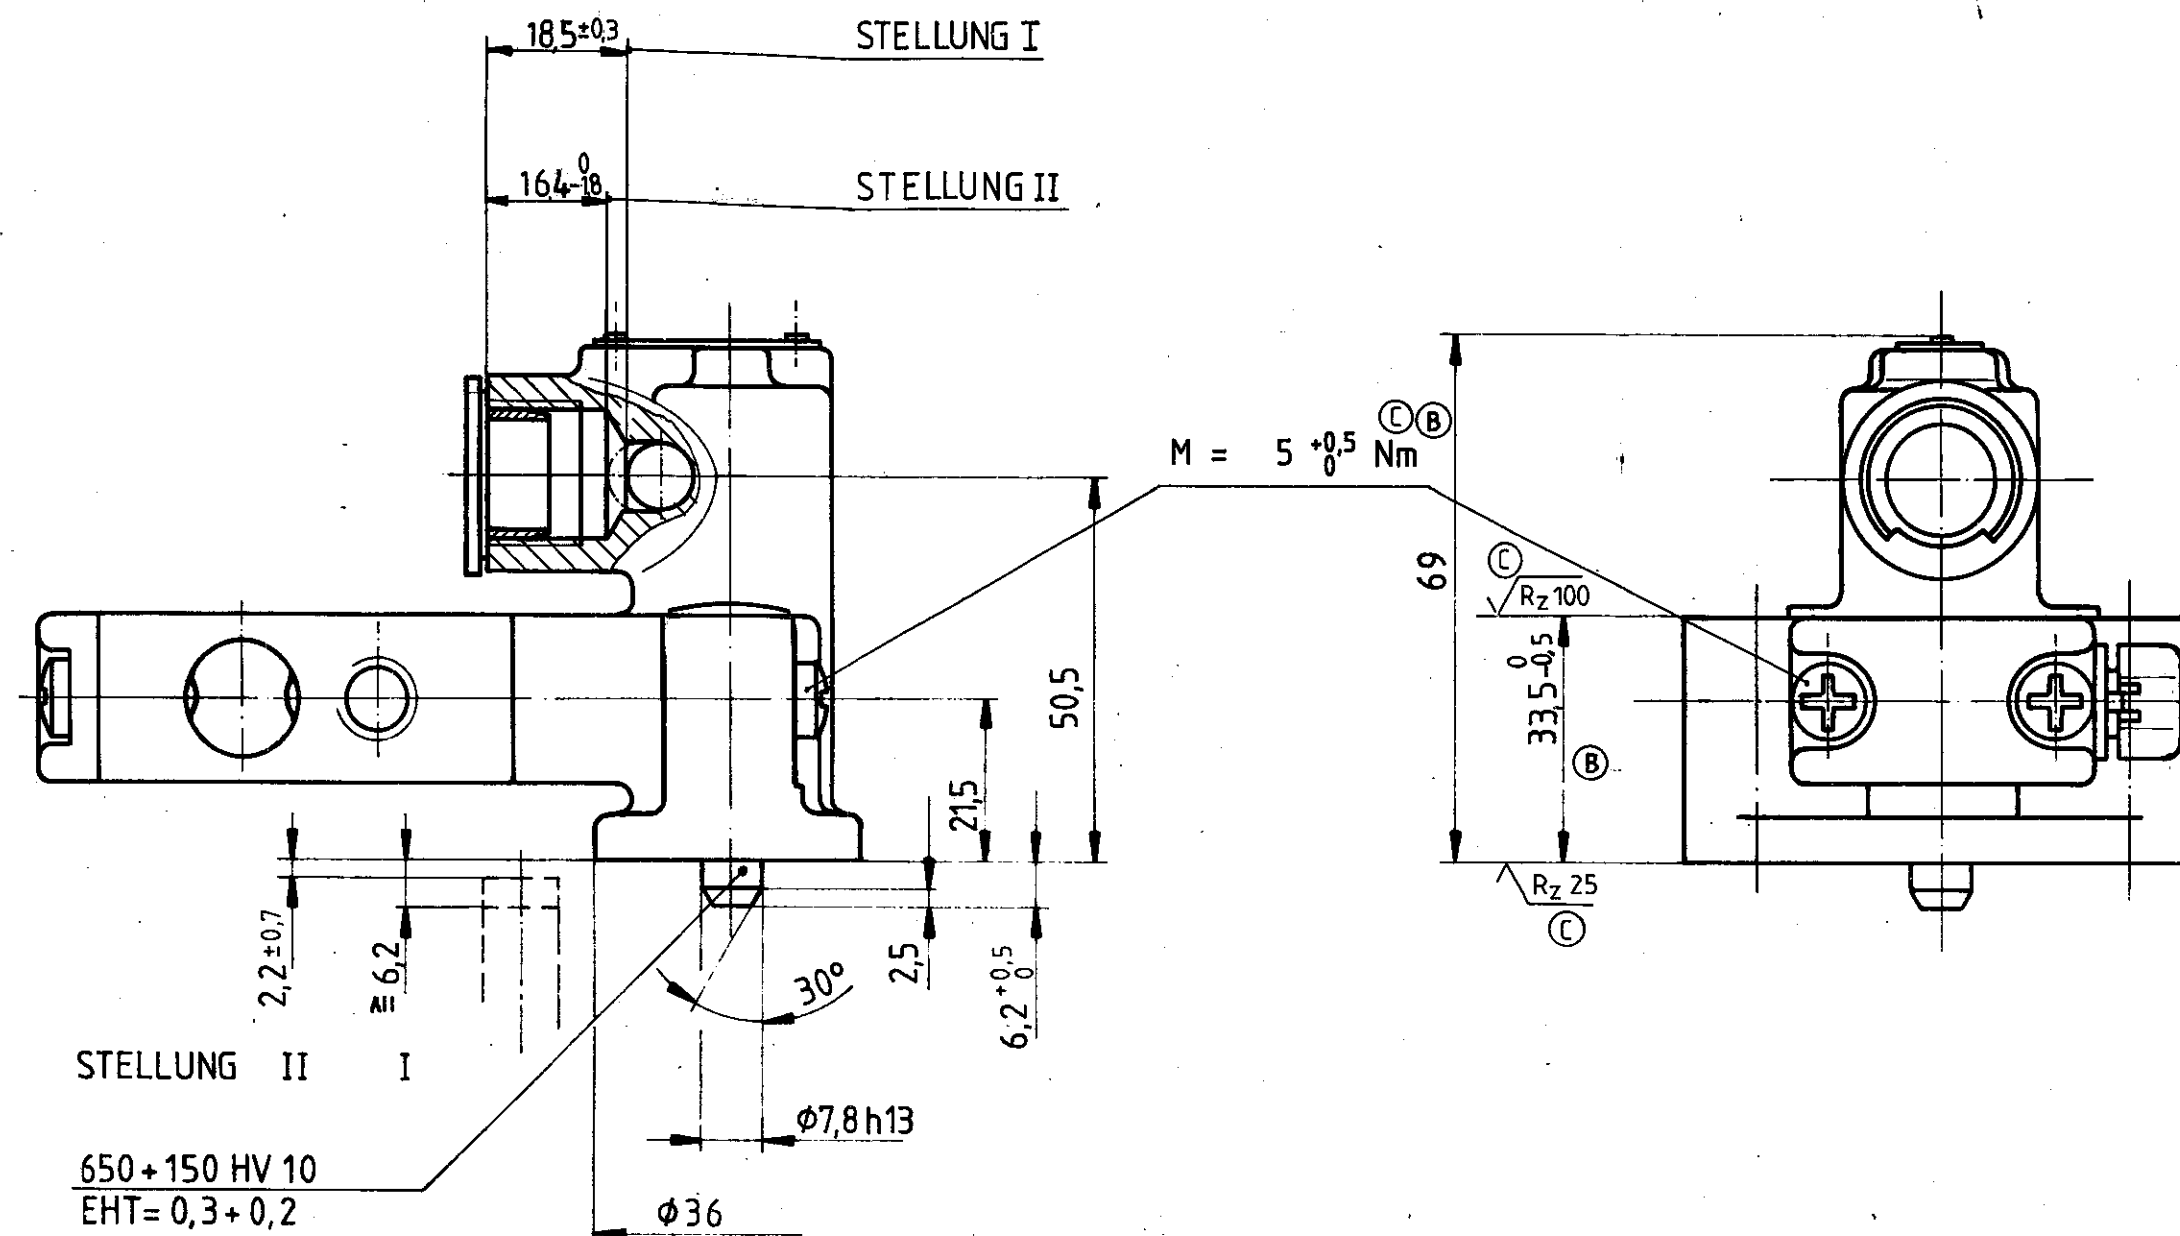

NOMINAL DIAMETER
NENNWEITE
DIAMETRE NOMINAL
DIAMETRO NOMINALE

1,5 mm

WORKING PRESSURE
BETRIEBSDRUCK
PRESSION DE SERVICE
PRESSIONE D'ESERCIZIO

4...10 bar

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
GAMME D'APPLICATION THERMIQUE
CAMPO DI APPLICAZIONE TERMICA



-15...+80 °C

MEDIUM
MEDIUM
FLUIDE
FLUIDO

AIR
LUFT
AIR
AIRA

OPERATING FORCE
BETAETIGUNGSKRAFT
FORCE DE COMMANDE
FORZA DI COMANDO

MAX. 500N AT 10bar
MAX. 500N BEI 10bar
500N MAXI SOUS 10bar
500N MAX. PER 10bar

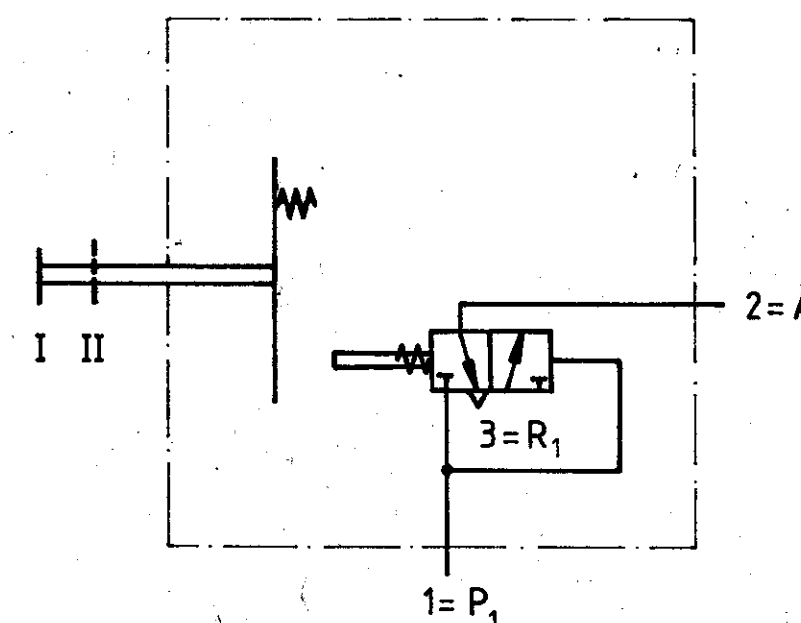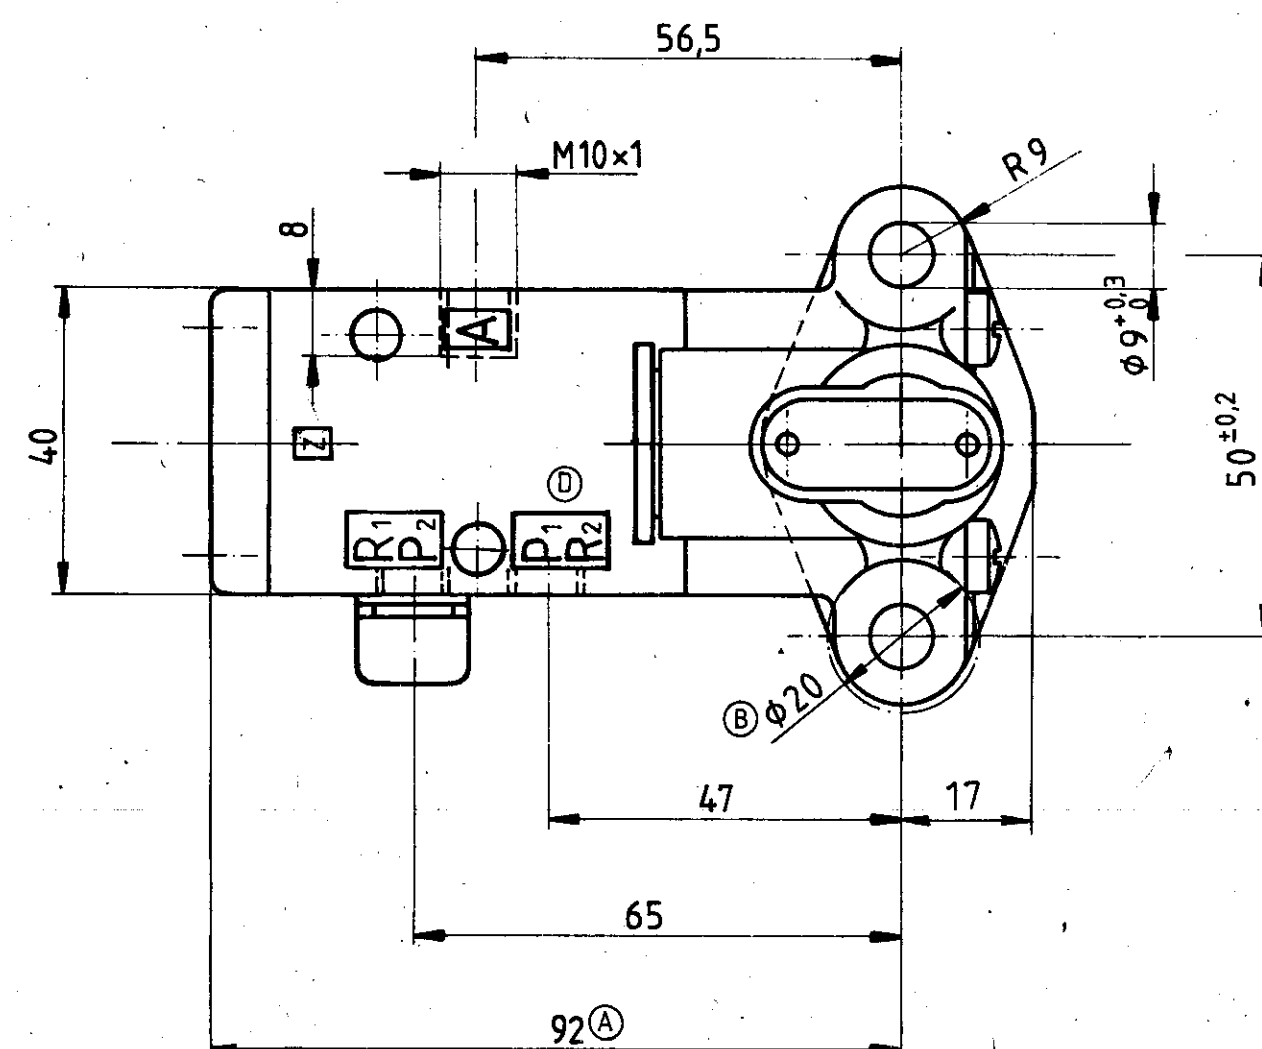

P1=1 SUPPLY, ENERGIEZUFLUSS VOM VORRAT, ALIMENTATION, ALIMENTAZIONE
A =2 DELIVERY, ENERGIEABFLUSS IN DIE ARBEITSLEITUNG, UTILISATION, MANDATA
R1=3 EXHAUST, ANSCHLUSS ATMOSPHAERE, ECHAPPEMENT, SCARICO

GENERAL TOLERANCES									
CLASS	RANGE OF NOMINAL DIMENSIONS ($\pm$ mm)						FORCE, POWER, PRESSURE ETC		
	0	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400		0	($\pm$ %)	
I		0.5	1	1.5	2	3		5	
II		1	2	3	4			10	
III		2	3.5	5	6.5			20	

TAPPED HOLES ACC. ISO 4039

[illegible]