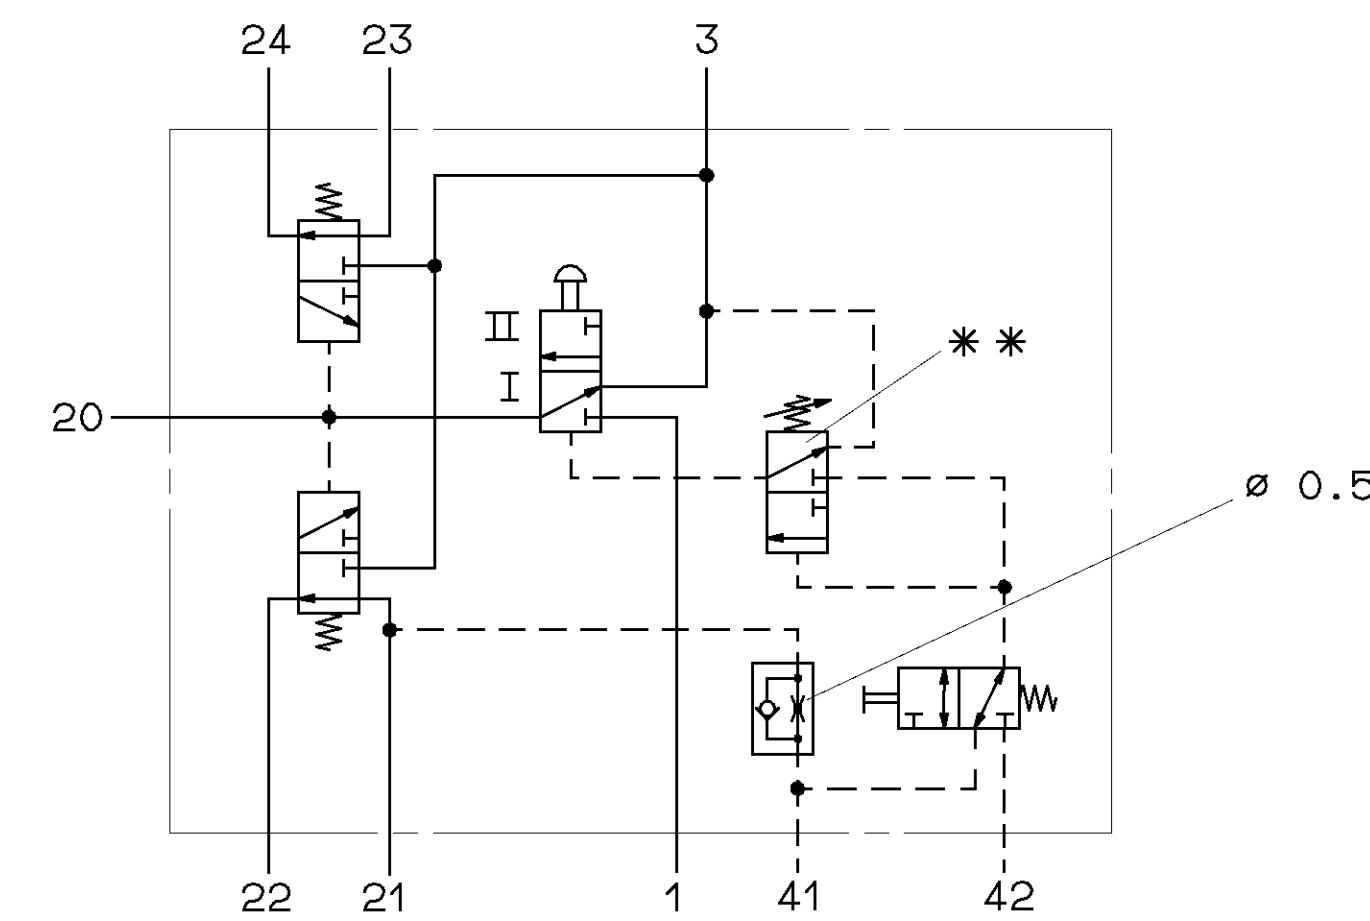
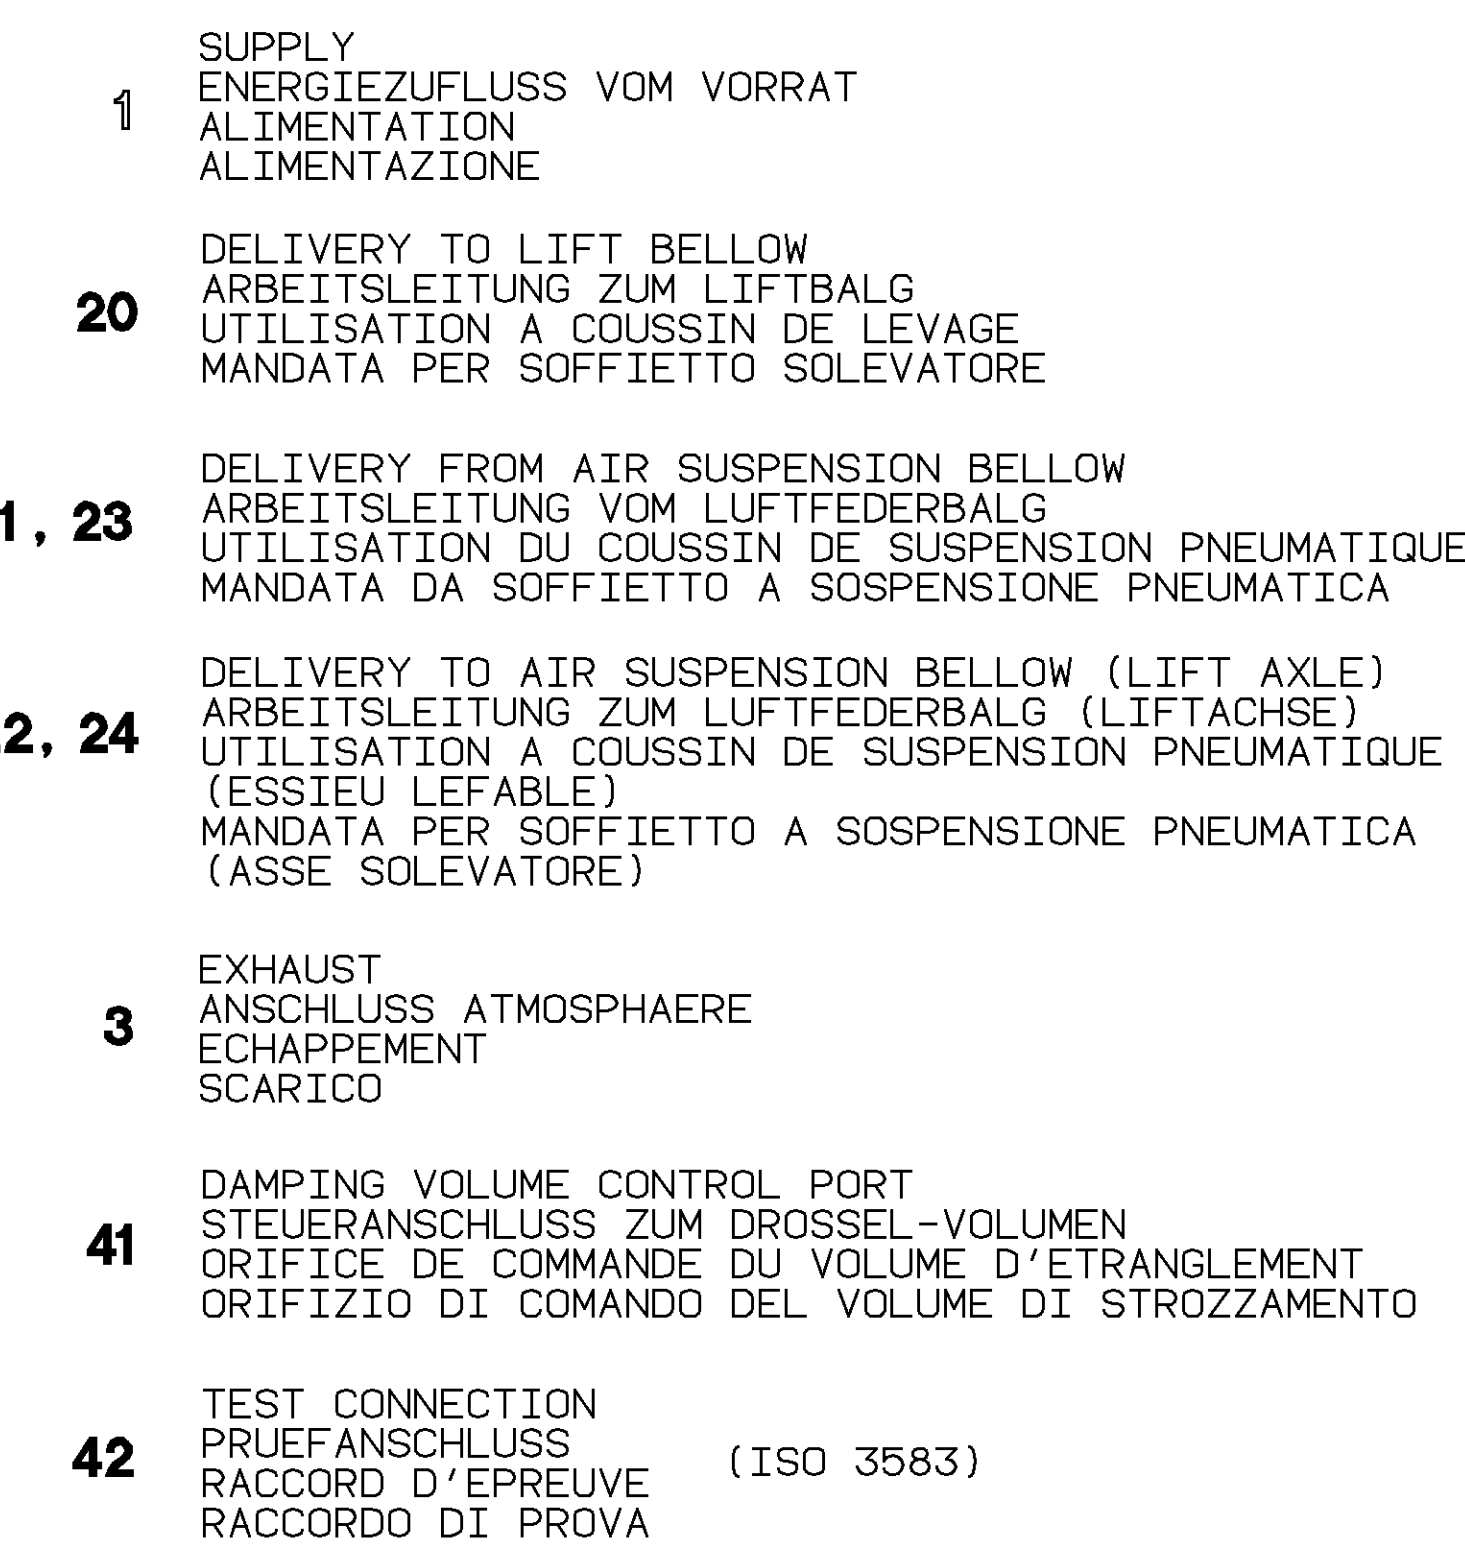
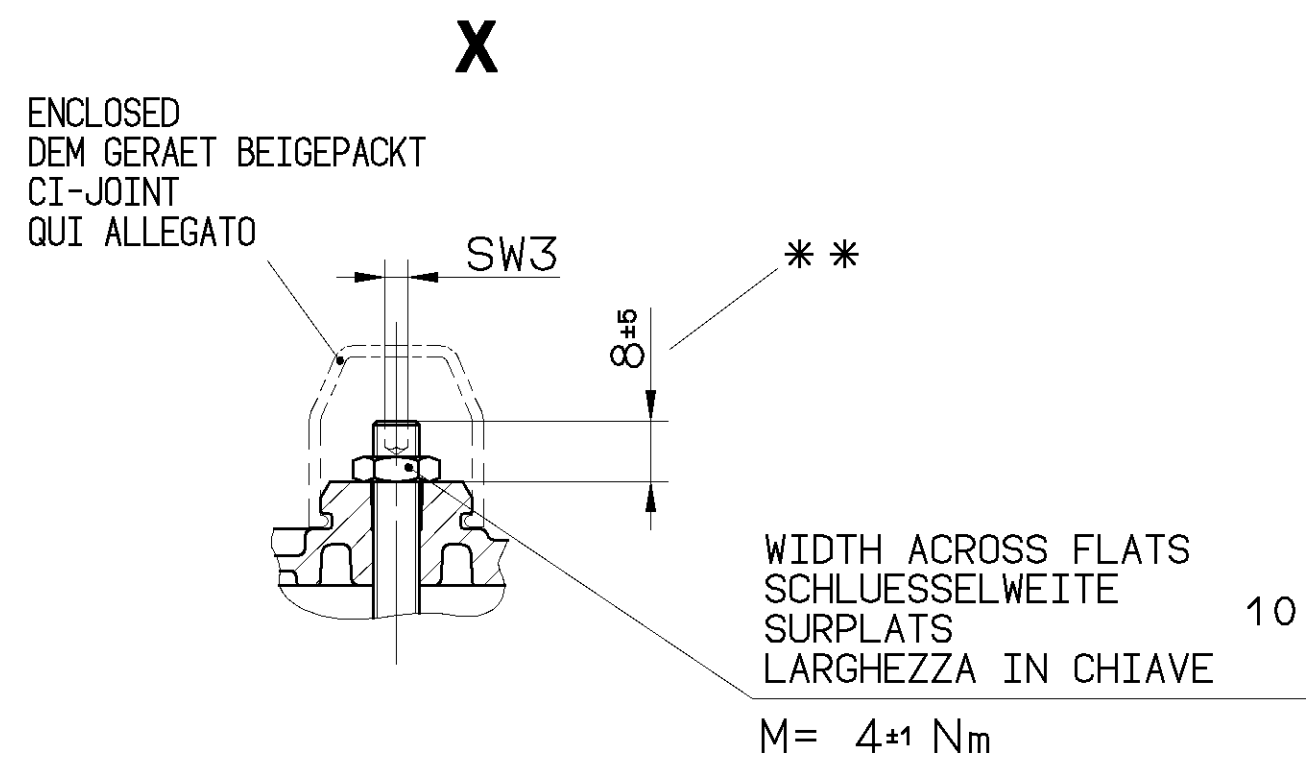


[illegible]

MIN. FLOW PASSAGE	/NOMINAL DIAMETER	
MIN. DURCHFLUSSEFFNUNG	/NENNWEITE	
MIN. ORIFICE CALIBRE	/DIAMETRE NOMINAL	
MIN. PASSAGGIO LIBERO	/DIAMETRO NOMINALE	
PORT	:	
ANSCHLUSS	:	
ORIFICE	:	38 mm ² (≅ø7mm)
ORIFIZIO	:	
PORT	:	
ANSCHLUSS	:	
ORIFICE	:	78 mm ² (≅ø10mm)
ORIFIZIO	:	

OPERATING FORCE :			
* BETAETIGUNGSKRAFT :	F ≤ 120 N		
EFFORT DE COMMANDE :			
FORZA DI COMANDO :			
PERMISSIBLE OVER LOAD		AXIAL	RADIAL
MAX. ZULAESSIGE UEBERLAST	400 N	AXIAL, 100 N	RADIAL
SURCHARGE ADMISE		AXIAL	RADIALE
SOVRACCARICO AMMESSO		ASSIALE	RADIALE

ADMISSIBLE INSTALLATION POSITION
ZULÄSSIGE EINBAULAGE
POSITION D'INSTALLATION ADMISE
POSIZIONE DI MONTAGGIO AMMESSA

FASTENING BEFESTIGUNG FIXATION FISSAGGIO	OPTIONAL WAHLWEISE FACULTATIF FACOLTATIVA	A, B	ONLY NUR SEULEMENT SOLO	A
---	--	-------------	----------------------------------	----------

General Specifications: JED-334-1, Size ISO 14405 LP							Copyright WABCO®			WABCO LIFT AXLE CONTROL VALVE LIFT AXLE STEUERVENTIL VALVE ESSIEU LEVABLE VALVOLA ASSE SOLLEVATORE					
Further Technical Data:							Date						Signature		
Doc. Code:		Sheet:		To:			2019-06-24						Bolop		
General Tolerances JED-261							Checked						Piskalo		
Range of Nominal Dimensions (± mm)							Expert			Piskalo					
Class 1)							Mass			Material No.					
≤ 50 > 50 > 180 > 400							2.2			463 084 000 0					
Fine 0.5 1.0 1.5 2.0							Size 1:1								
Medium X 1.0 2.0 3.0 4.0							KG								
Coarse 2.0 3.5 5.0 6.5							CAI System								
Tapped Holes acc. JED-152							A 1			CADAM					
1) Tolerance Class Applied Crossmarked							CADAM			EDU-No. 500488					
							Revision 6 x J			Techn. Resp. 5812					
										Replacement for 884 008 040 0/50-04-B					