


Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzarne il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituirà un evidente abuso e comporterà il risarcimento dei danni subiti. E' fatto riserva di tutti i diritti derivanti da brevetti o modelli.

Toute Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Controvention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

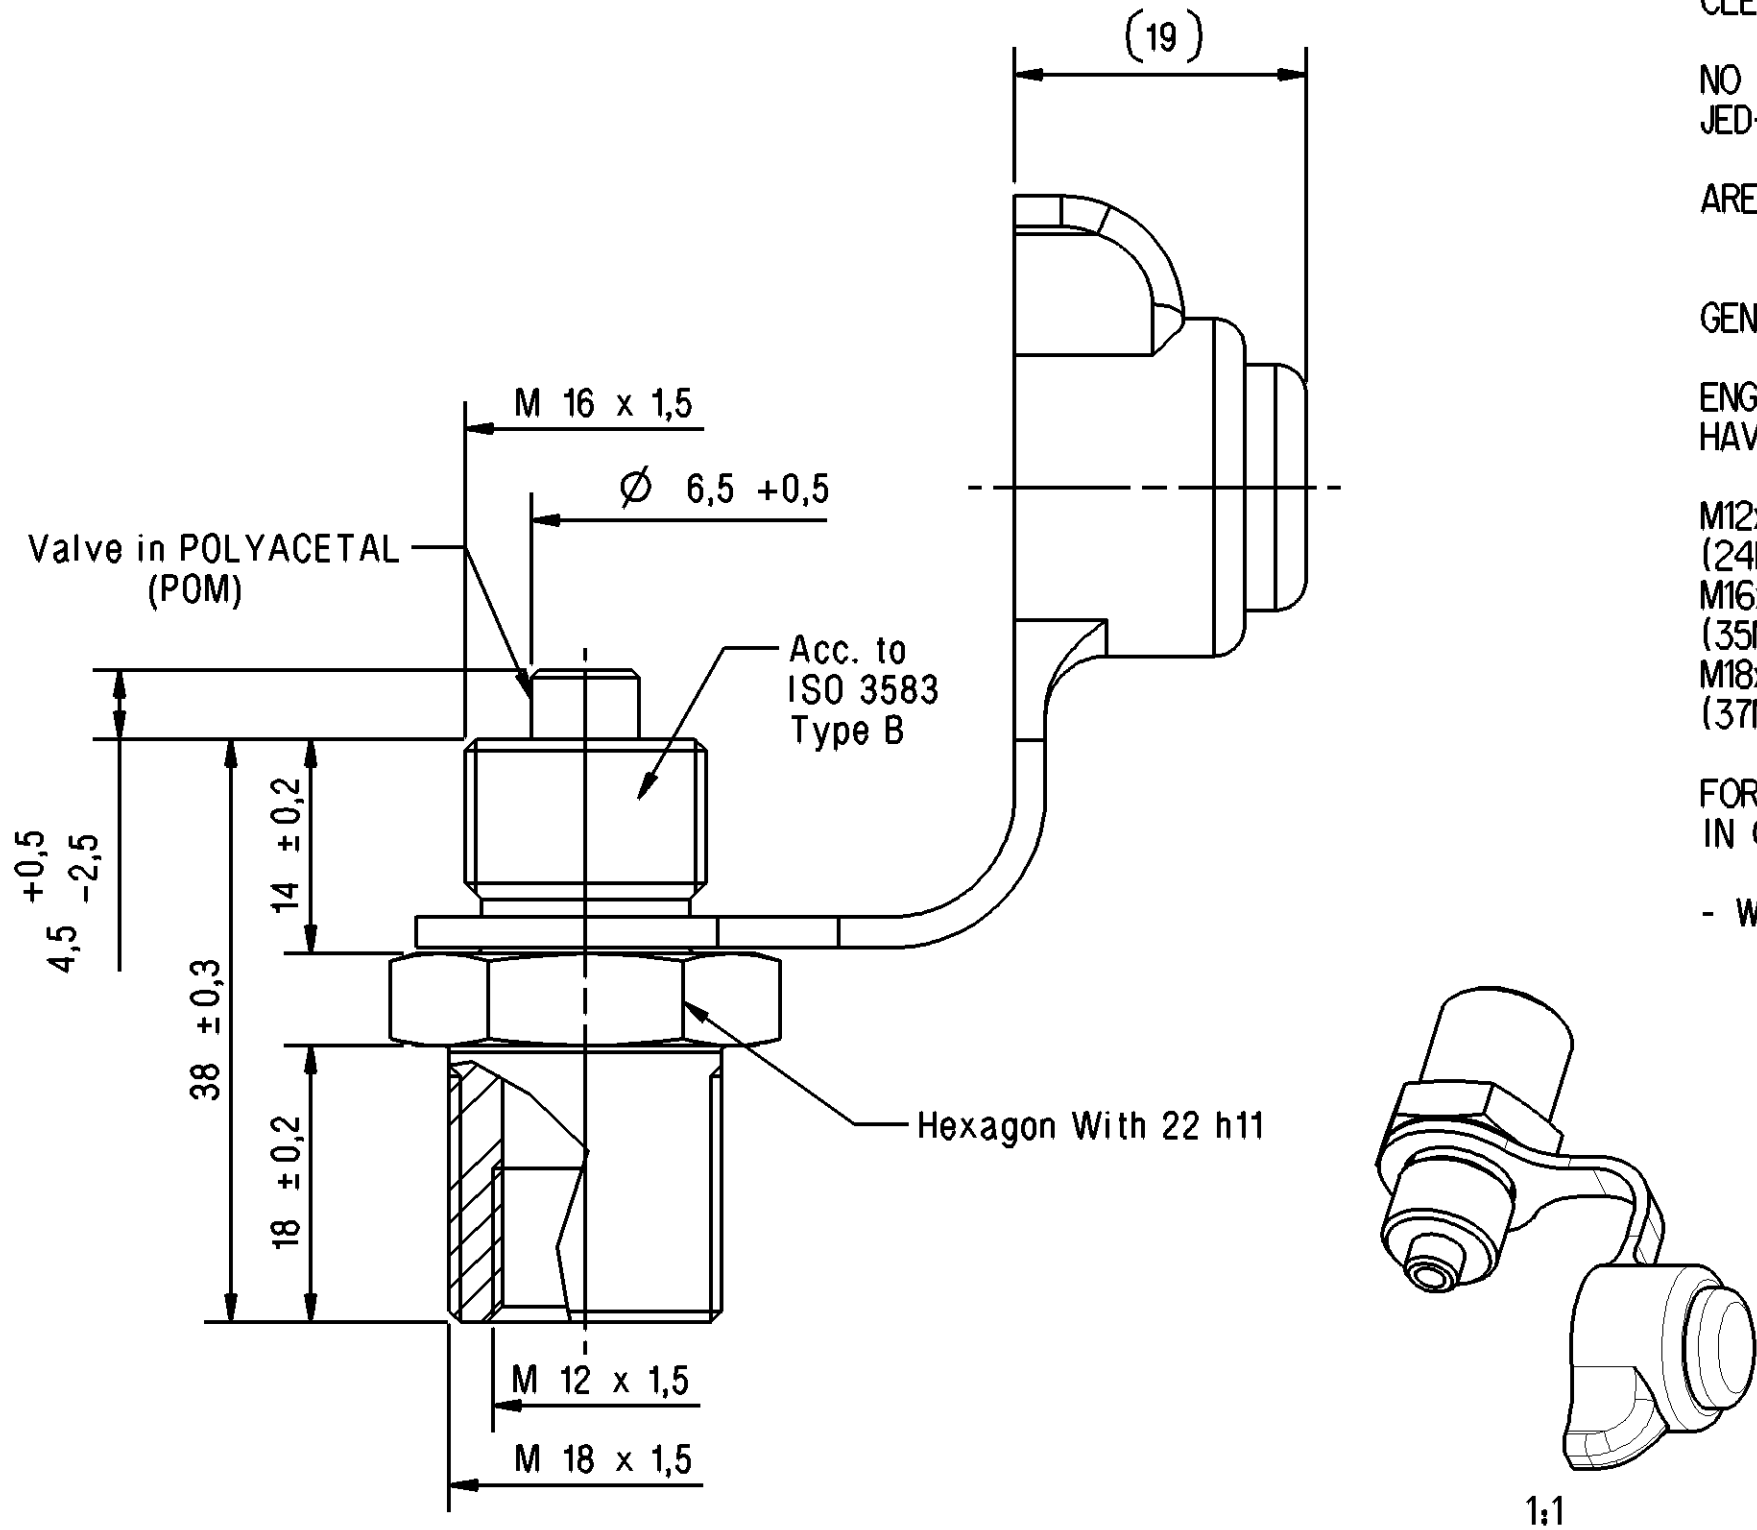

MATERIAL OF HOUSING: CuZn
MATERIAL OF VALVE POM
MATERIAL OF SEALS: EPDM
MATERIAL OF PROTECTION CAP: TPE
WORKING TEMPERATURE: -40 C/+100 C
WORKING PRESSURE: max. 12.5 bar

CLEANLINESS REQUIREMENT:
NO PARTICLES >1MM ALLOWED ACC. TO MANDATORY STANDARD JED-334 AND JED-593
AREA: FOR THE WHOLE PART (SPECIAL AGREEMENTS POSSIBLE, TO BE AGREED WITH PRODUCT ENGINEERING)
GENERAL SPECIFICATION : JED-762 ; JED-622 ; JED-220
ENGINEERING RELATED AGREEMENTS WITH SUPPLIER HAVE TO BE MENTIONED IN THE "RELEASE OF SUPPLIER"
M12x1.5 TORQUE WITHOUT LUBRICATION NOMINAL 20Nm (24Nm MAX.)
M16x1.5 TORQUE WITHOUT LUBRICATION NOMINAL 30Nm (35Nm MAX.)
M18x1.5 TORQUE WITHOUT LUBRICATION NOMINAL 32Nm (37Nm MAX.)
FOR USE IN APPLICATION IN COMPRESSED AIR SYSTEMS IN COMMERCIAL VEHICLES :
- WITH COMPRESSED AIR ACC. JED-848

General Specification: JED-334-1 , Size ISO 14405 LP							Copyright WABCO®			WABCO Test Port																				
Further Technical Data:							Date		Signature																					
Doc. Code:			Sheet:		To		Drawn																							
General Tolerances JED-261							2018-02-21		Bulaj																					
Range of Nominal Dimensions (± mm) <table><tr><td rowspan="4">Class 1)</td><td>≤ 50</td><td>> 50 ≤ 180</td><td>> 180 ≤ 400</td><td>> 400</td><td rowspan="4"></td></tr><tr><td>0.5</td><td>1.0</td><td>1.5</td><td>2.0</td></tr><tr><td>1.0</td><td>2.0</td><td>3.0</td><td>4.0</td></tr><tr><td>2.0</td><td>3.5</td><td>5.0</td><td>6.5</td></tr></table> ±3°							Class 1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400		0.5	1.0	1.5	2.0	1.0	2.0	3.0	4.0	2.0	3.5	5.0	6.5	Checked		2018-02-22		Szczulkowski	
								Class 1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400		> 400																	
									0.5	1.0	1.5		2.0																	
									1.0	2.0	3.0		4.0																	
2.0	3.5	5.0	6.5																											
							Expert																							
							Szczulkowski																							
Tapped Holes acc. 1) Tolerance Class Applied Crossmarked							Mass	Scale	Material No.				Date of first issue: 2018-02-22																	
							0.065 KG	2:1	463 703 204 0				Doc.Code	Language	Sheet															
													005	EN	1/1															
							Size	CAD System		ECN-No.	Revision	Techn. Resp.	Replacement for																	
							A 3	CREO		-	-	5790	-																	