
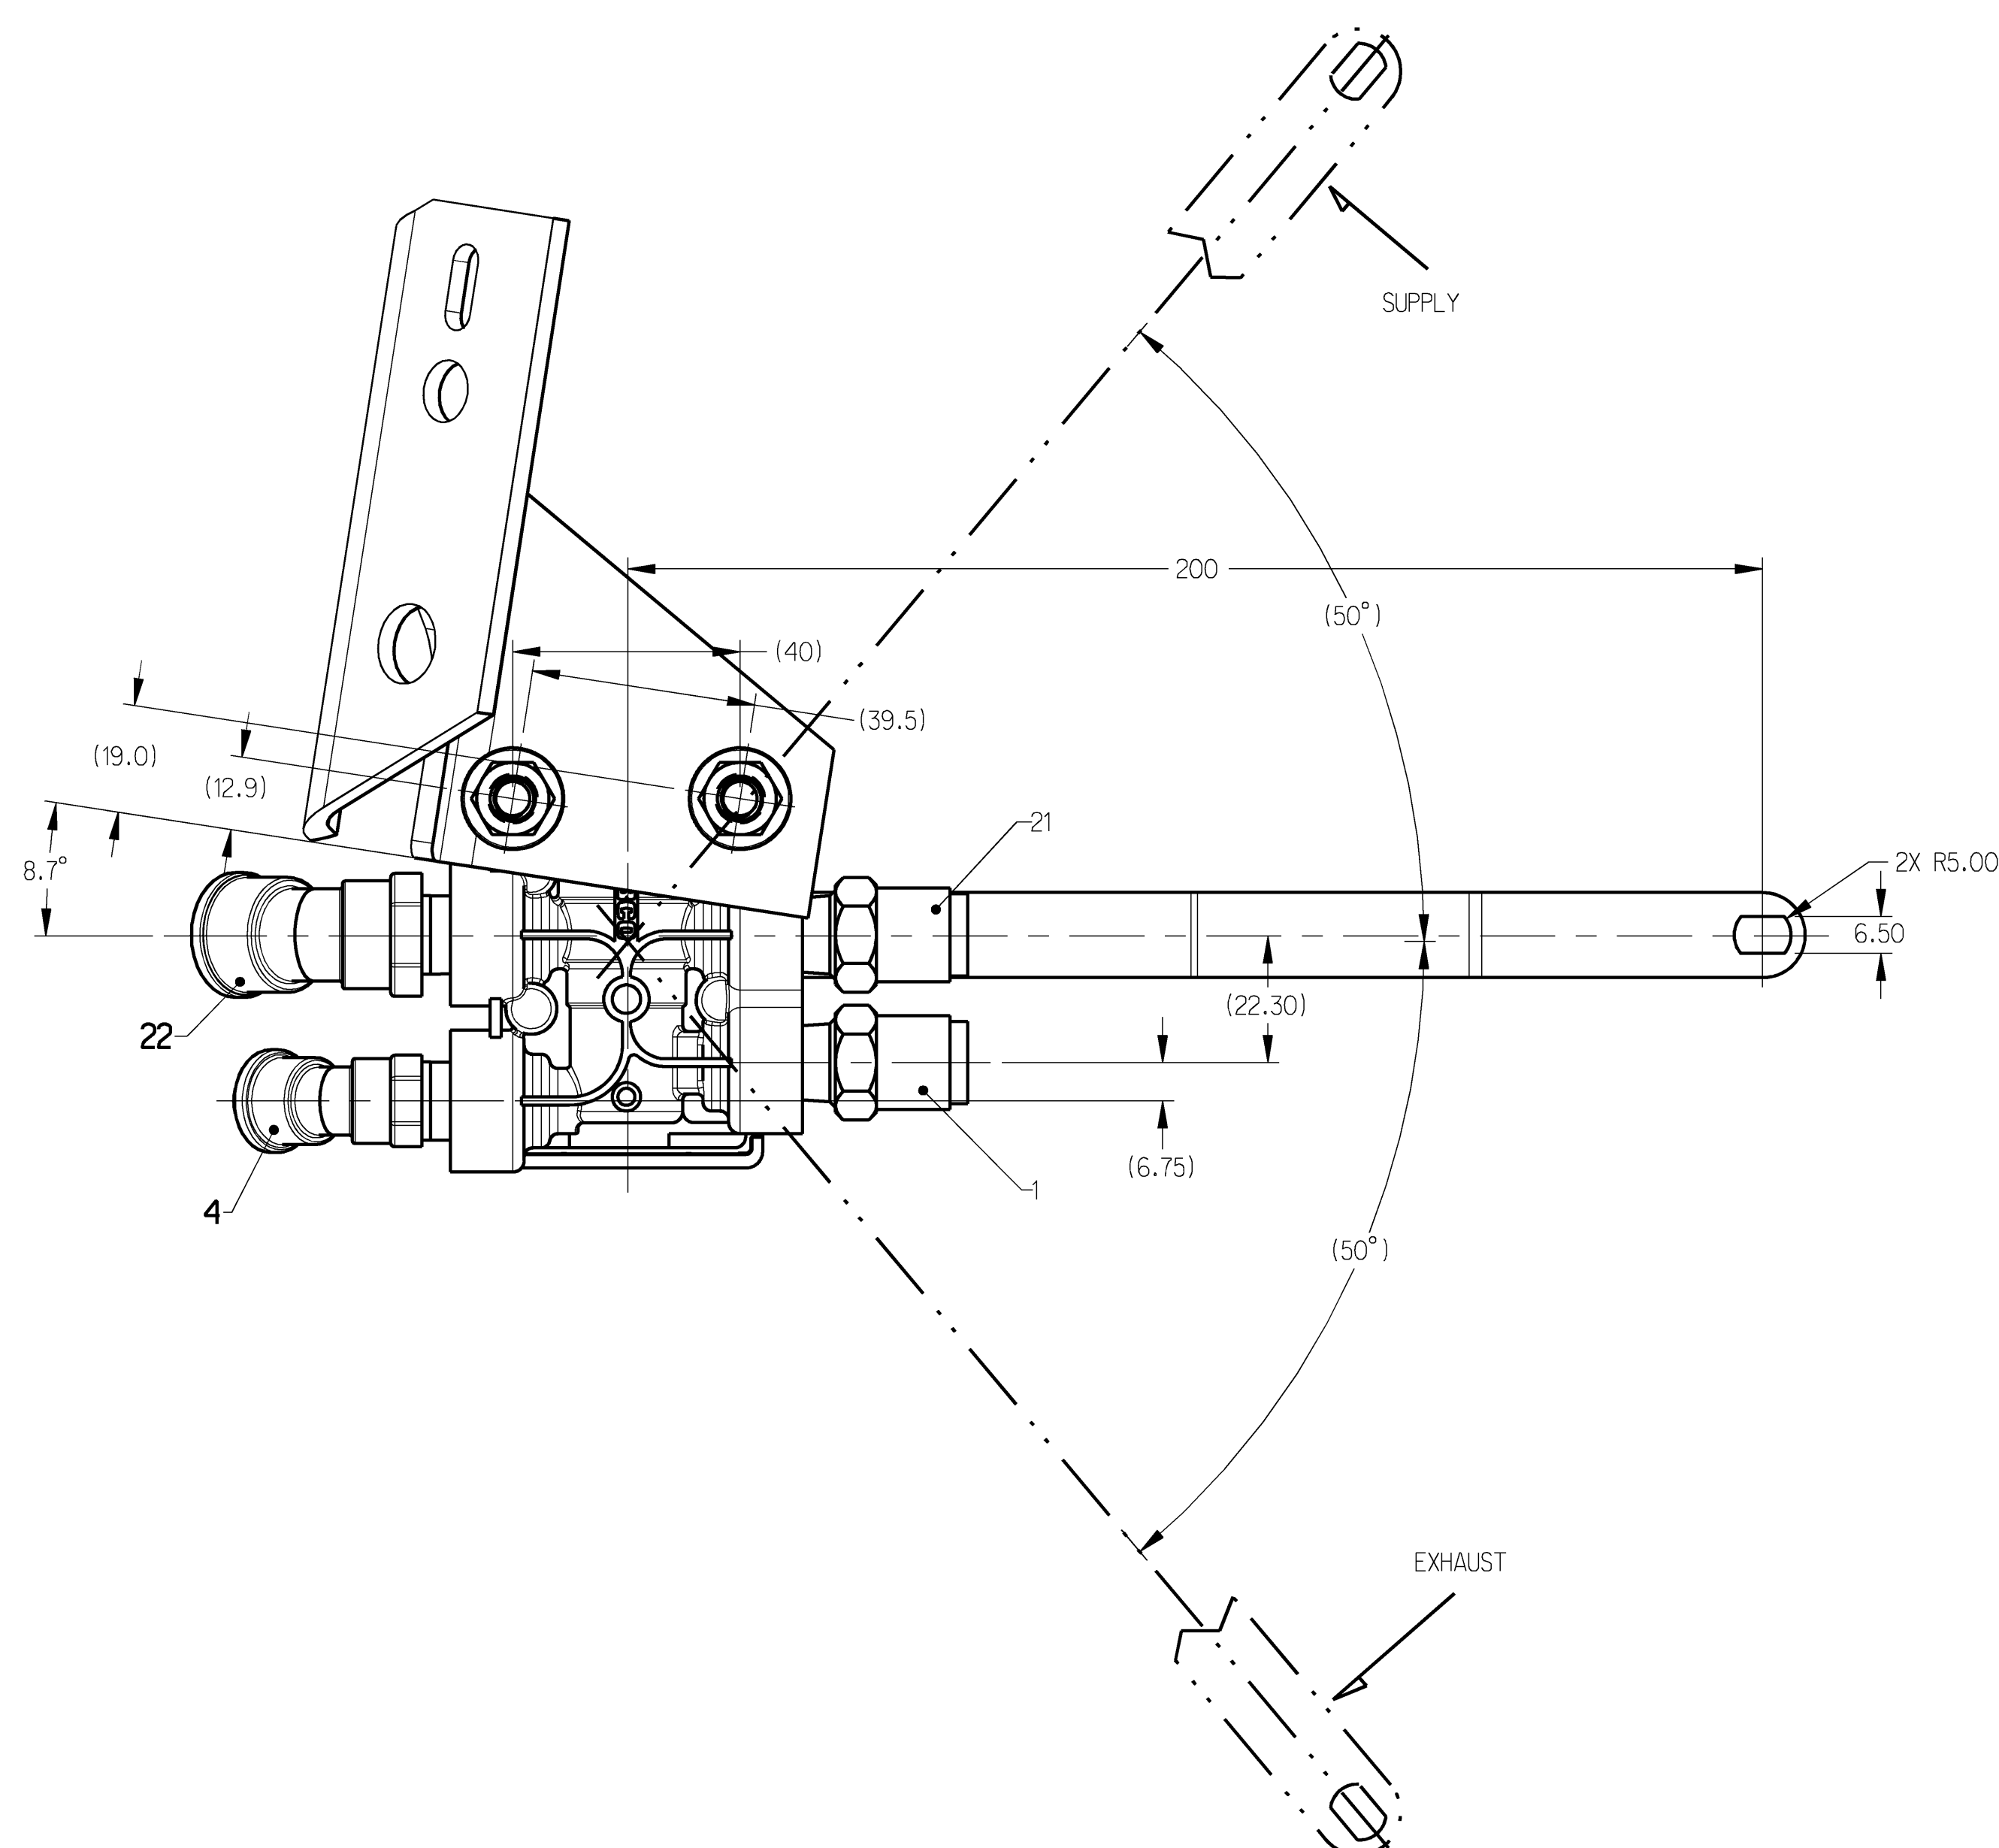
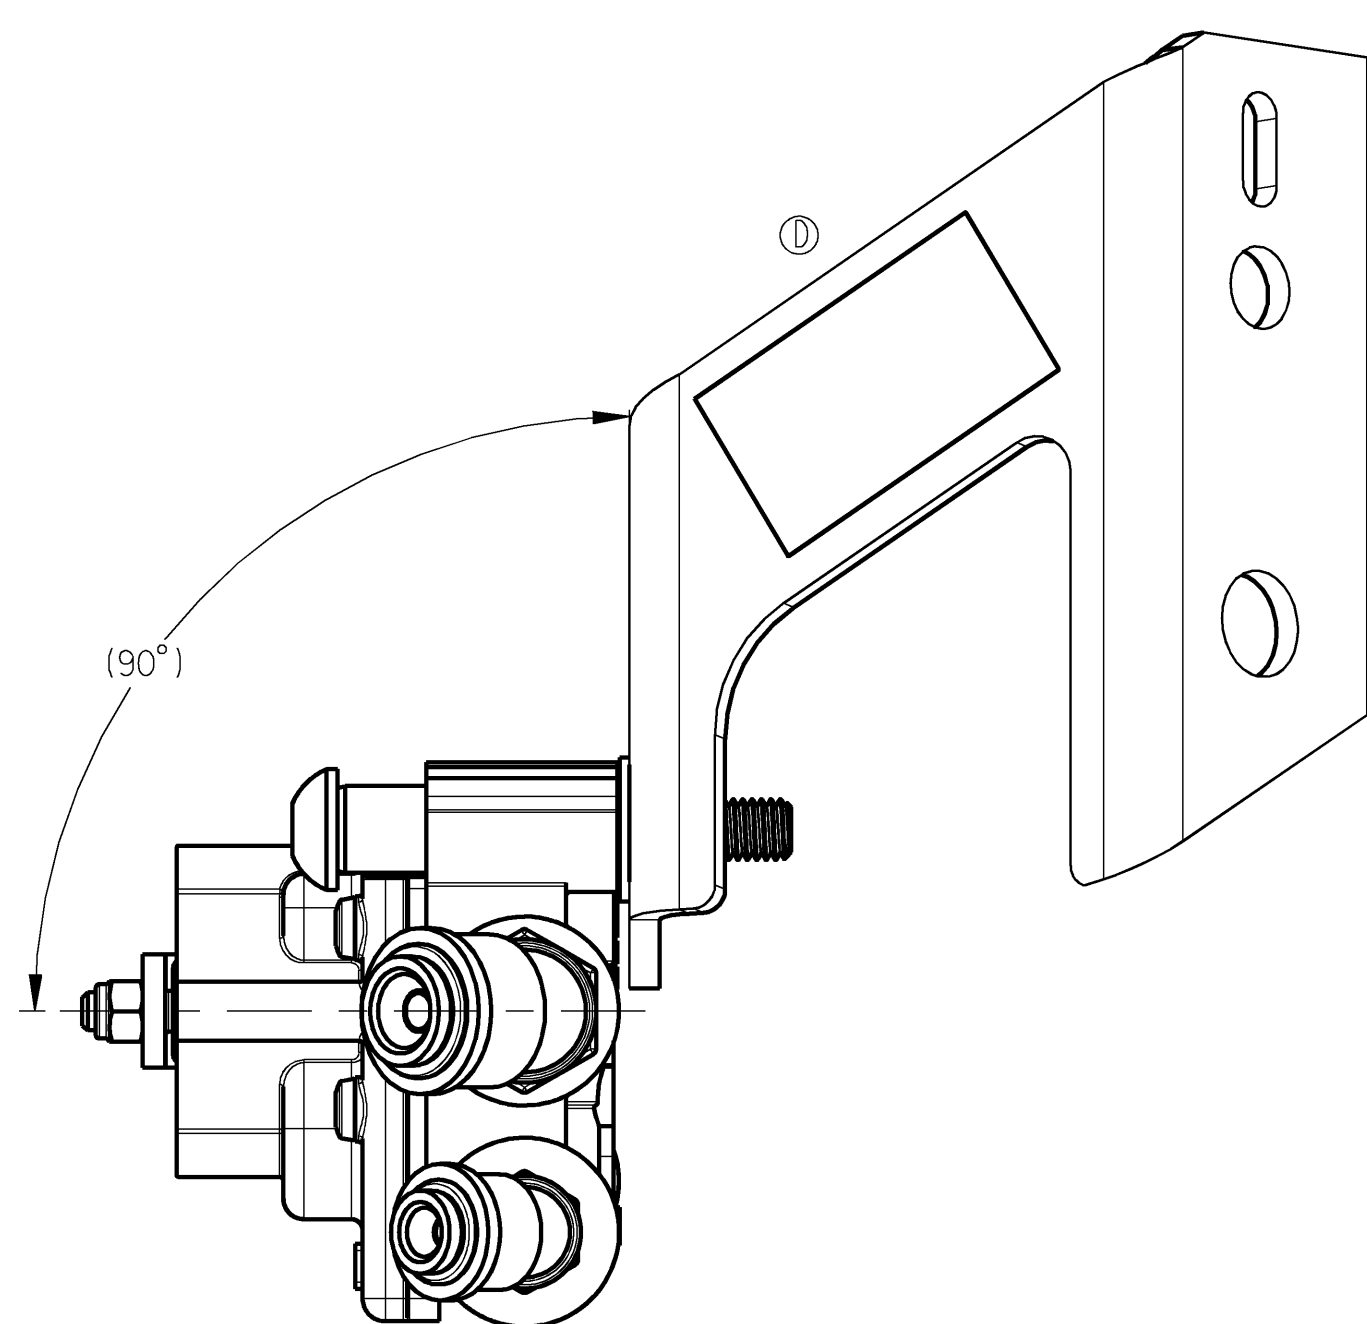
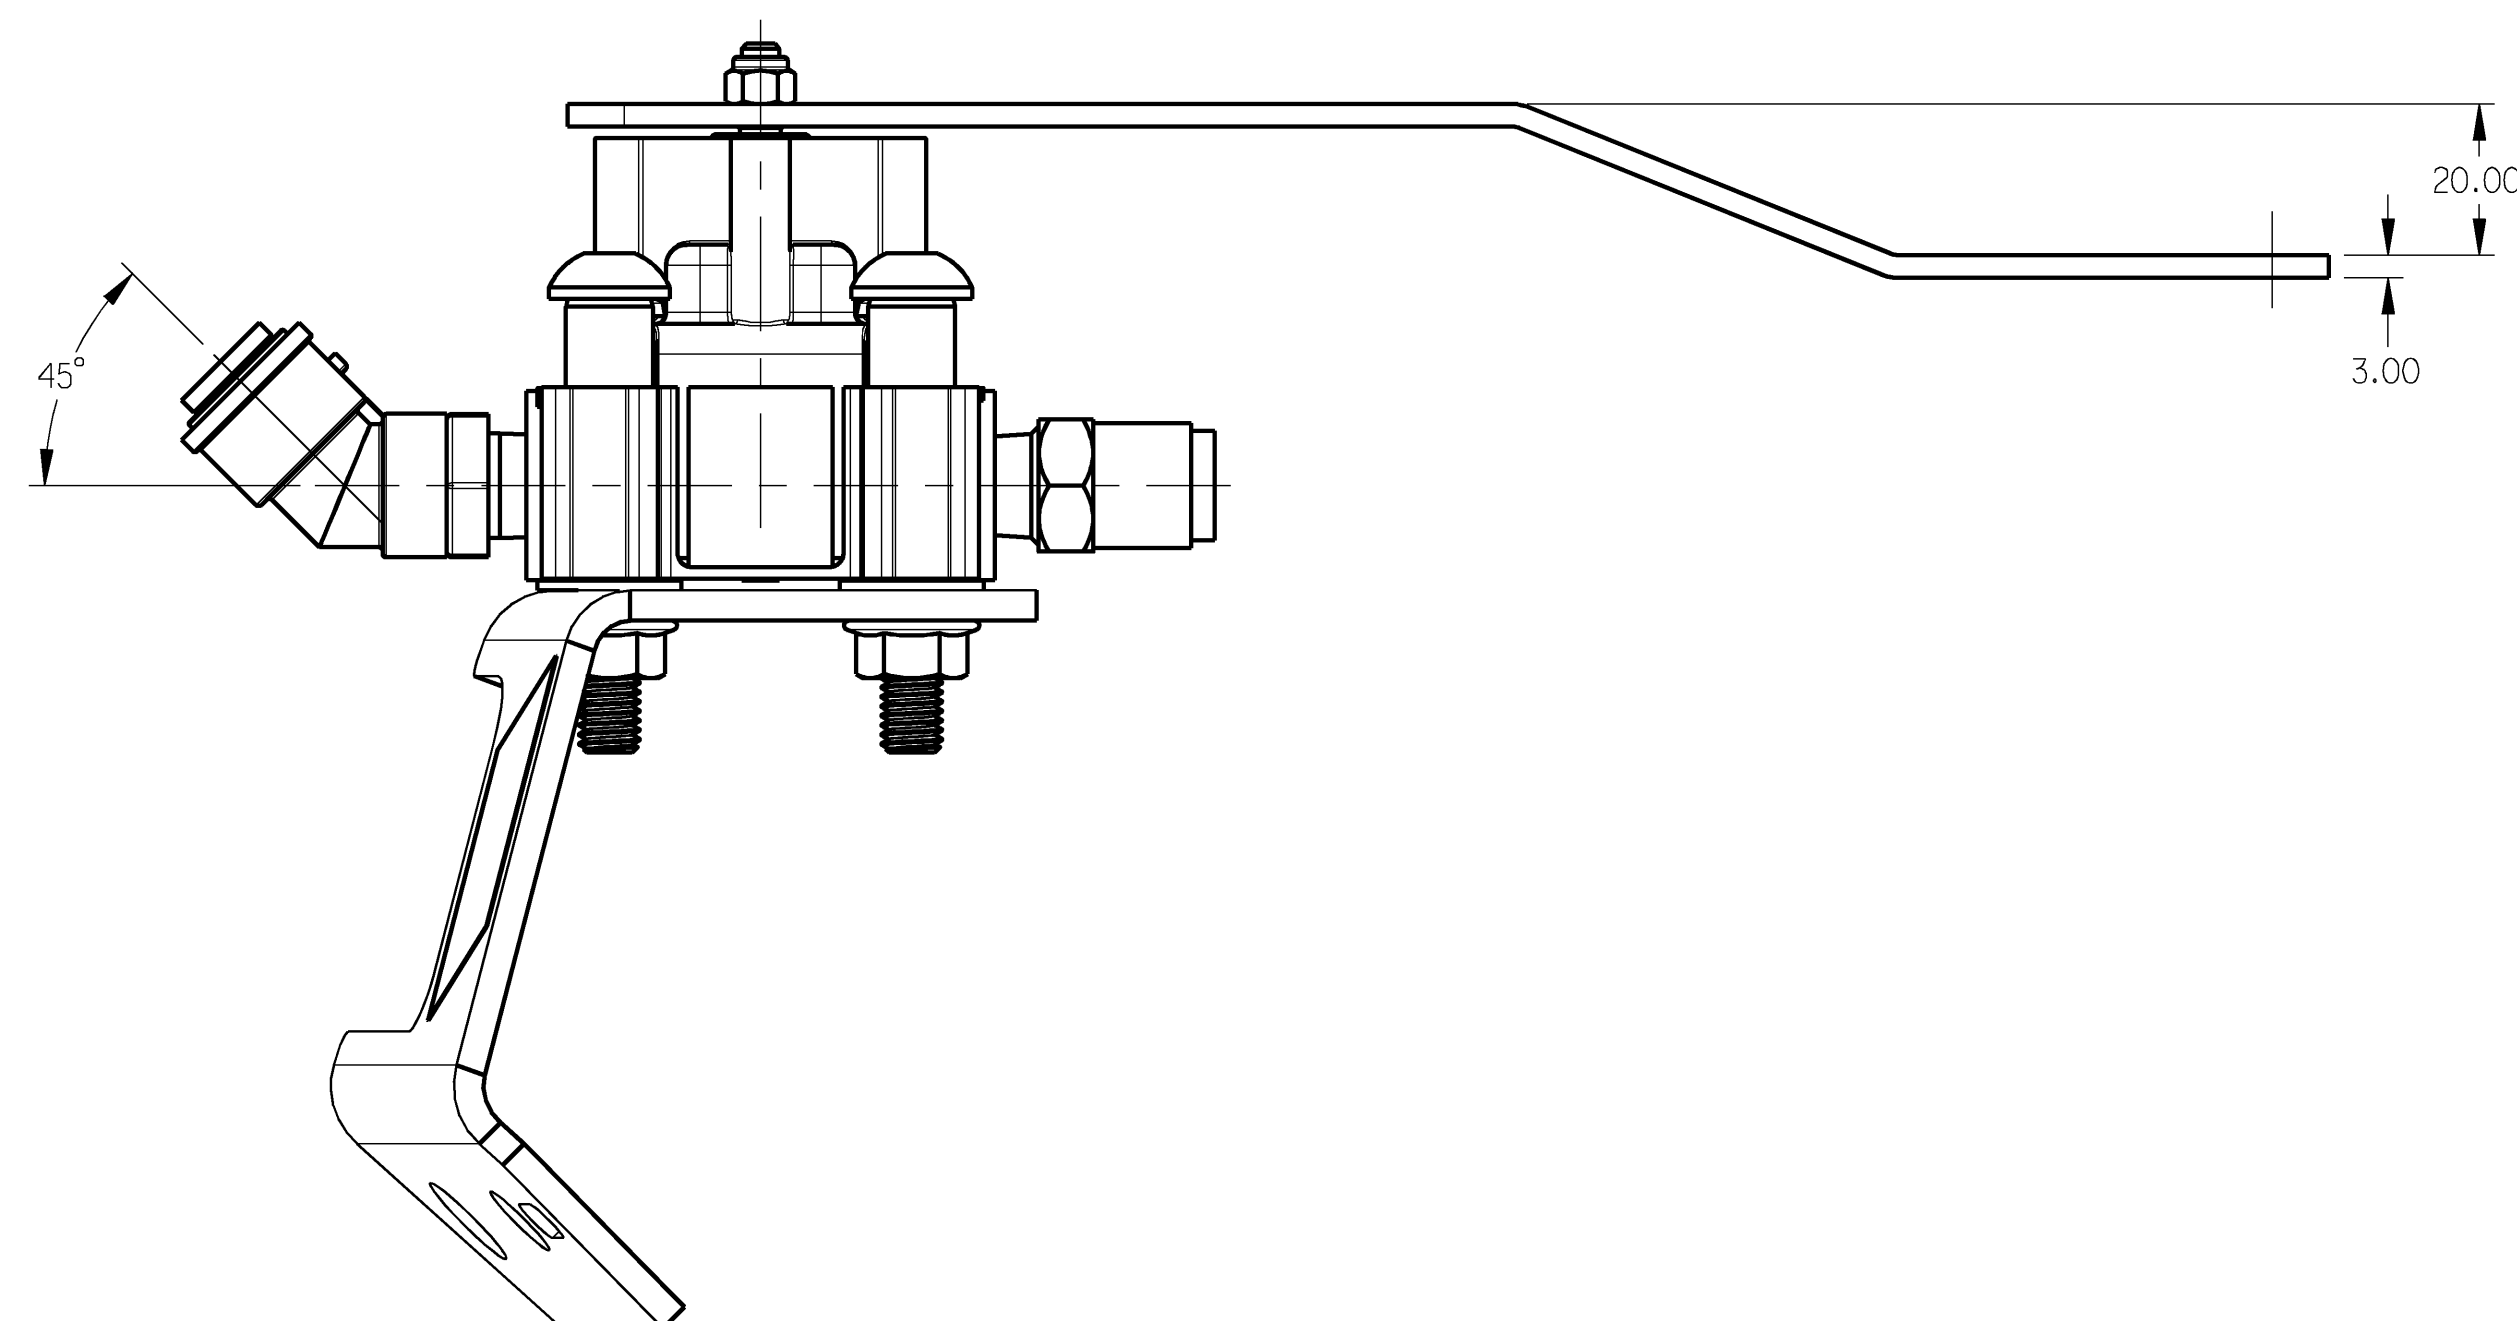


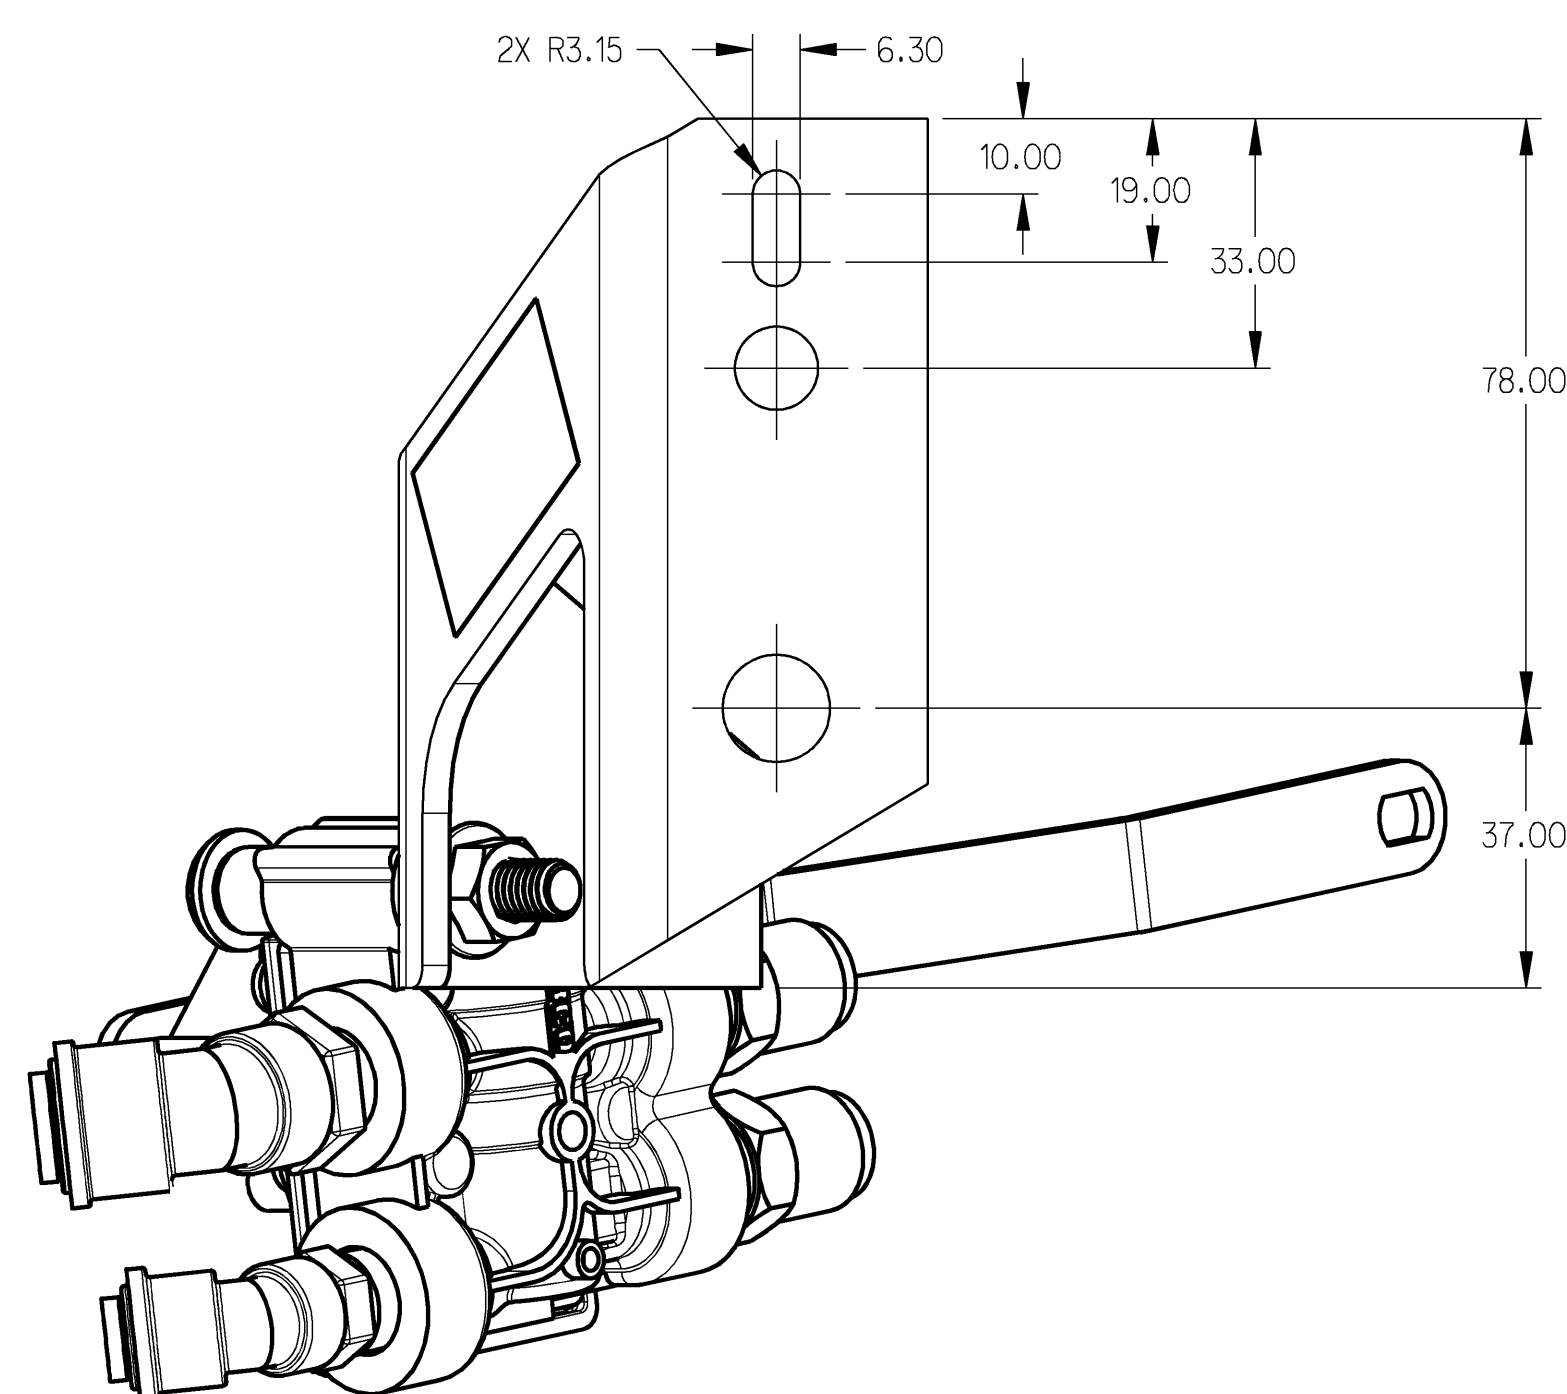

①NOTES:

- 1) 1 SUPPLY
#6 HOSE TO 1/4" NPT
MAXIMUM TORQUE 14Nm
- 2) 2/22 DELIVERY
#6 HOSE TO 1/4" NPT
MAXIMUM TORQUE 14Nm
- 3) 4 PILOT DUMP FUNCTION
#4 HOSE TO 1/4" NPT
MAXIMUM TORQUE 14Nm
- 4) 3 EXHAUST
- 5) MAXIMUM TORQUE FOR M8 FASTENER 24Nm ± 4 Nm
- 6) VALVE LEVER MUST BE PINNED IN NEUTRAL POSITION
DURING ASSEMBLY OF VALVE TO MOUNTING BRACKET REMOVE
PIN AFTER ASSEMBLY BEFORE DELIVERY
- 7) WABCO LABEL MUST CONTAIN THE FOLLOWING CUSTOMER PART
NUMBER:
WABCO:390K413M
- 8) FOR ALL FURTHER TECHNICAL
AND PERFORMANCE DATA SEE WABCO
DRAWING 464 038 OR O DOCUMENT
CODE 605.

THIRD ANGLE PROJECTION

General Specification: ISO 334-1, Size 164-16 ^{1/2}		Copyright WABCO®		 WABCO® CHASSIS LEVELING VALVE	
Further Technical Data:		Date: _____ Signature: _____			
Doc. Code: _____ Sheet: _____ To: _____		2019-06-12		Srinivasaprasanna	
General Parameters: ISO 334-1		2019-06-12		Pooladiti	
Range at Nominal Dimensions (± mm)		Mass		Scale	
Class 11	≤ 50 50 > 100 100 > 180 180 > 400	Size		Material No.	
Pin	0.5 1.0 1.5 2.0	1:1		Date of first issue: 2003-02-07	
File	0.5 2.0 3.0 4.0	Gas System		Doc. Code Language	
Class	2.0 3.5 5.0 6.5	A 0 PREO		605 EN 1/1	
Tapped Holes: _____		E/CN No.		Revision	
1) Traverse Slot, Applied Crossmember		500709		3x 5642-AN	
		Techn. Ref.		Replacement for:	
		464 008 115 0		464 008 112 0	