

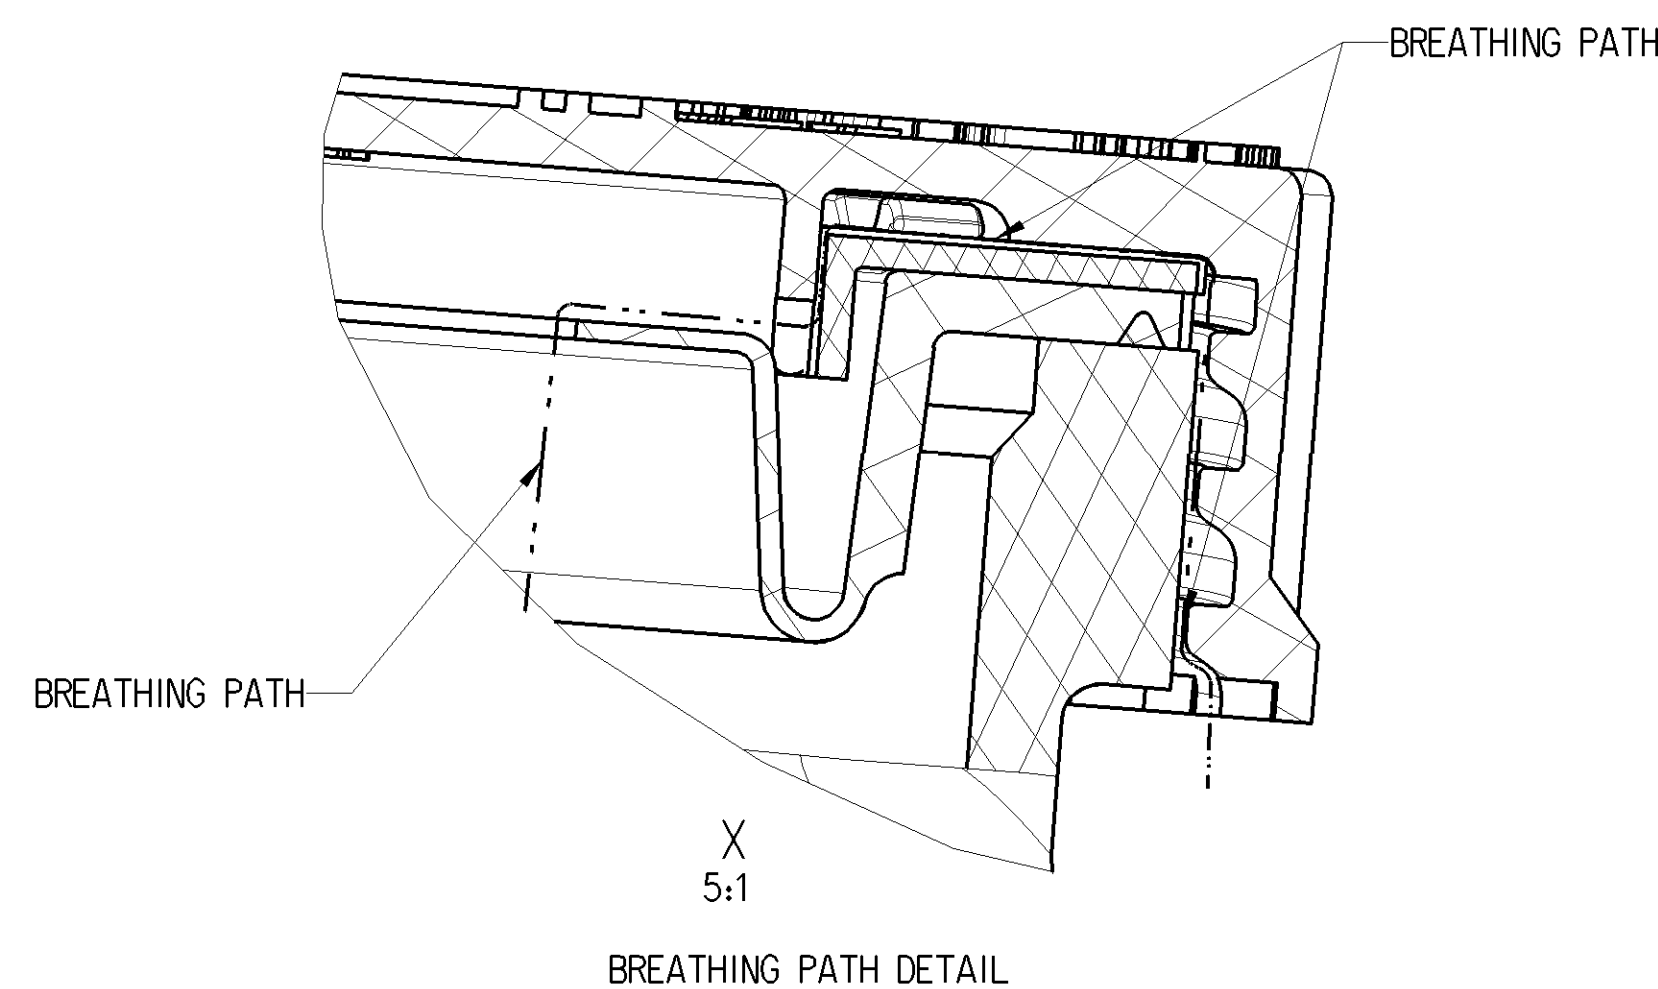
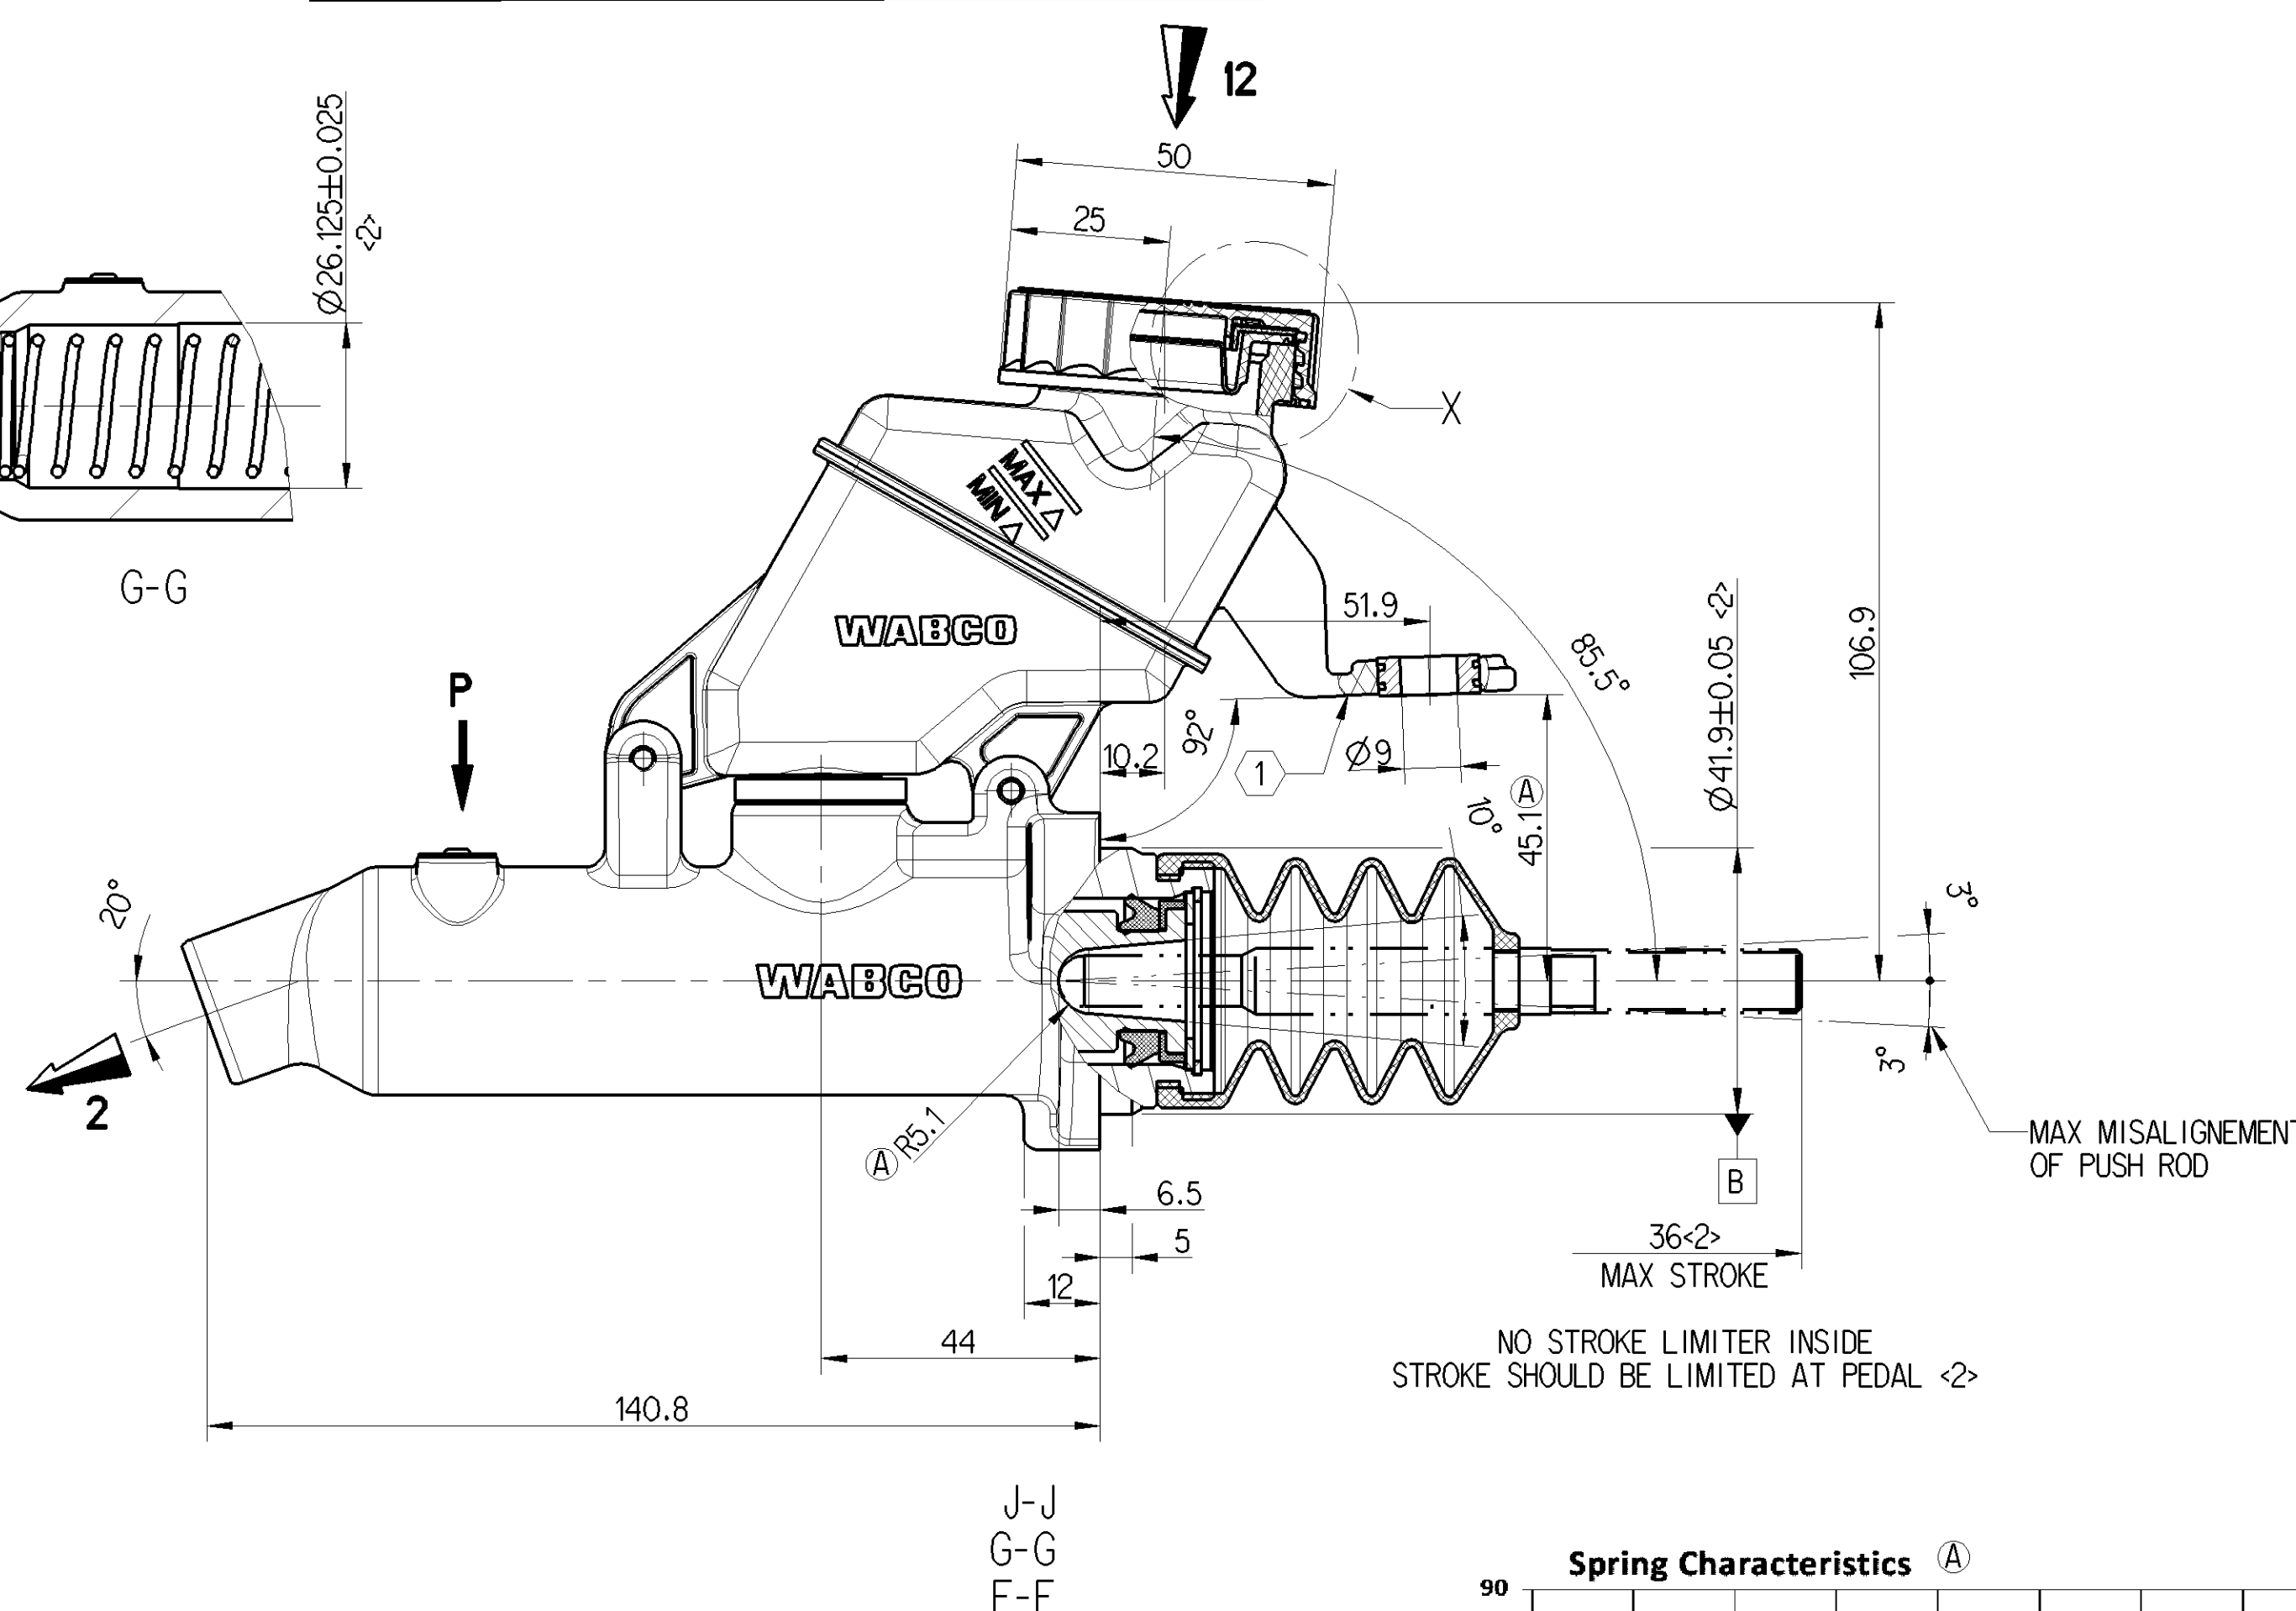
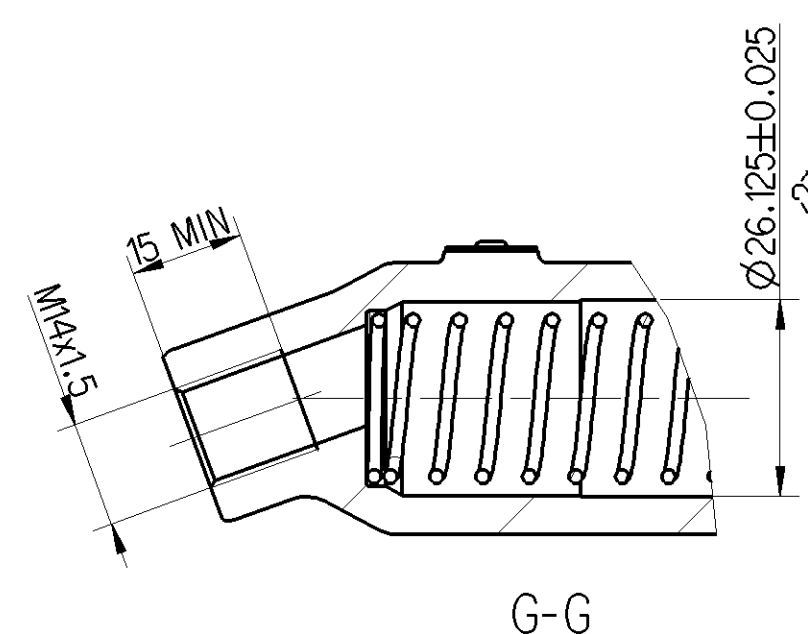
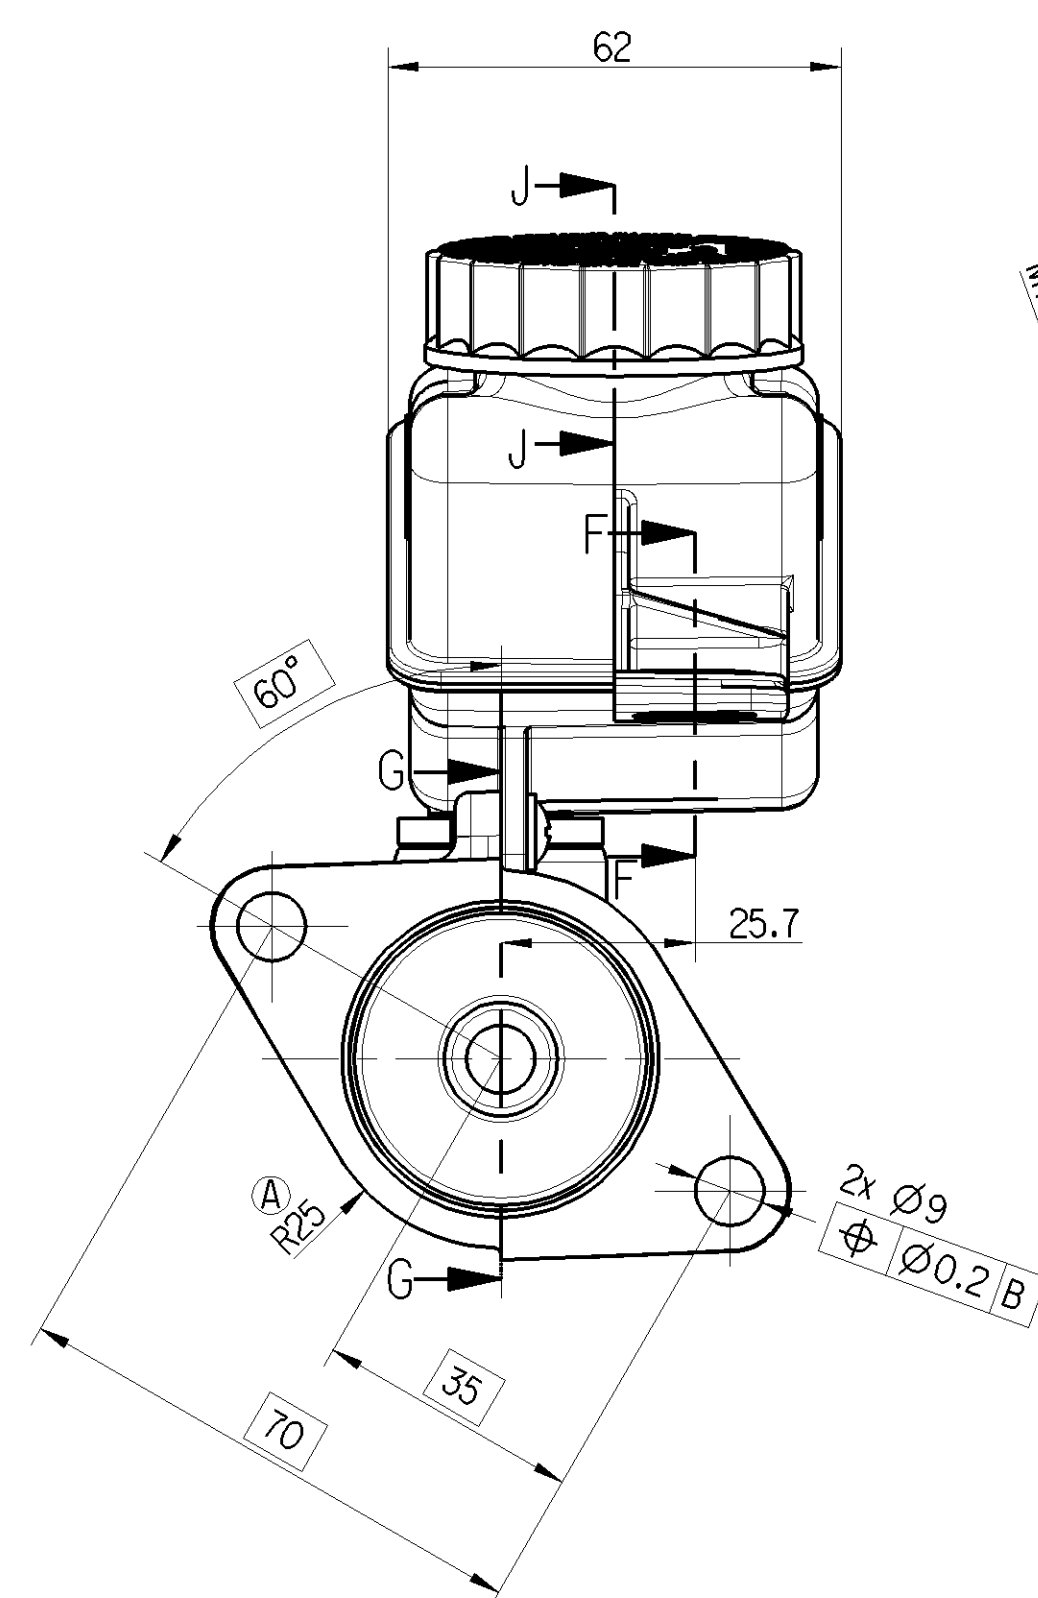
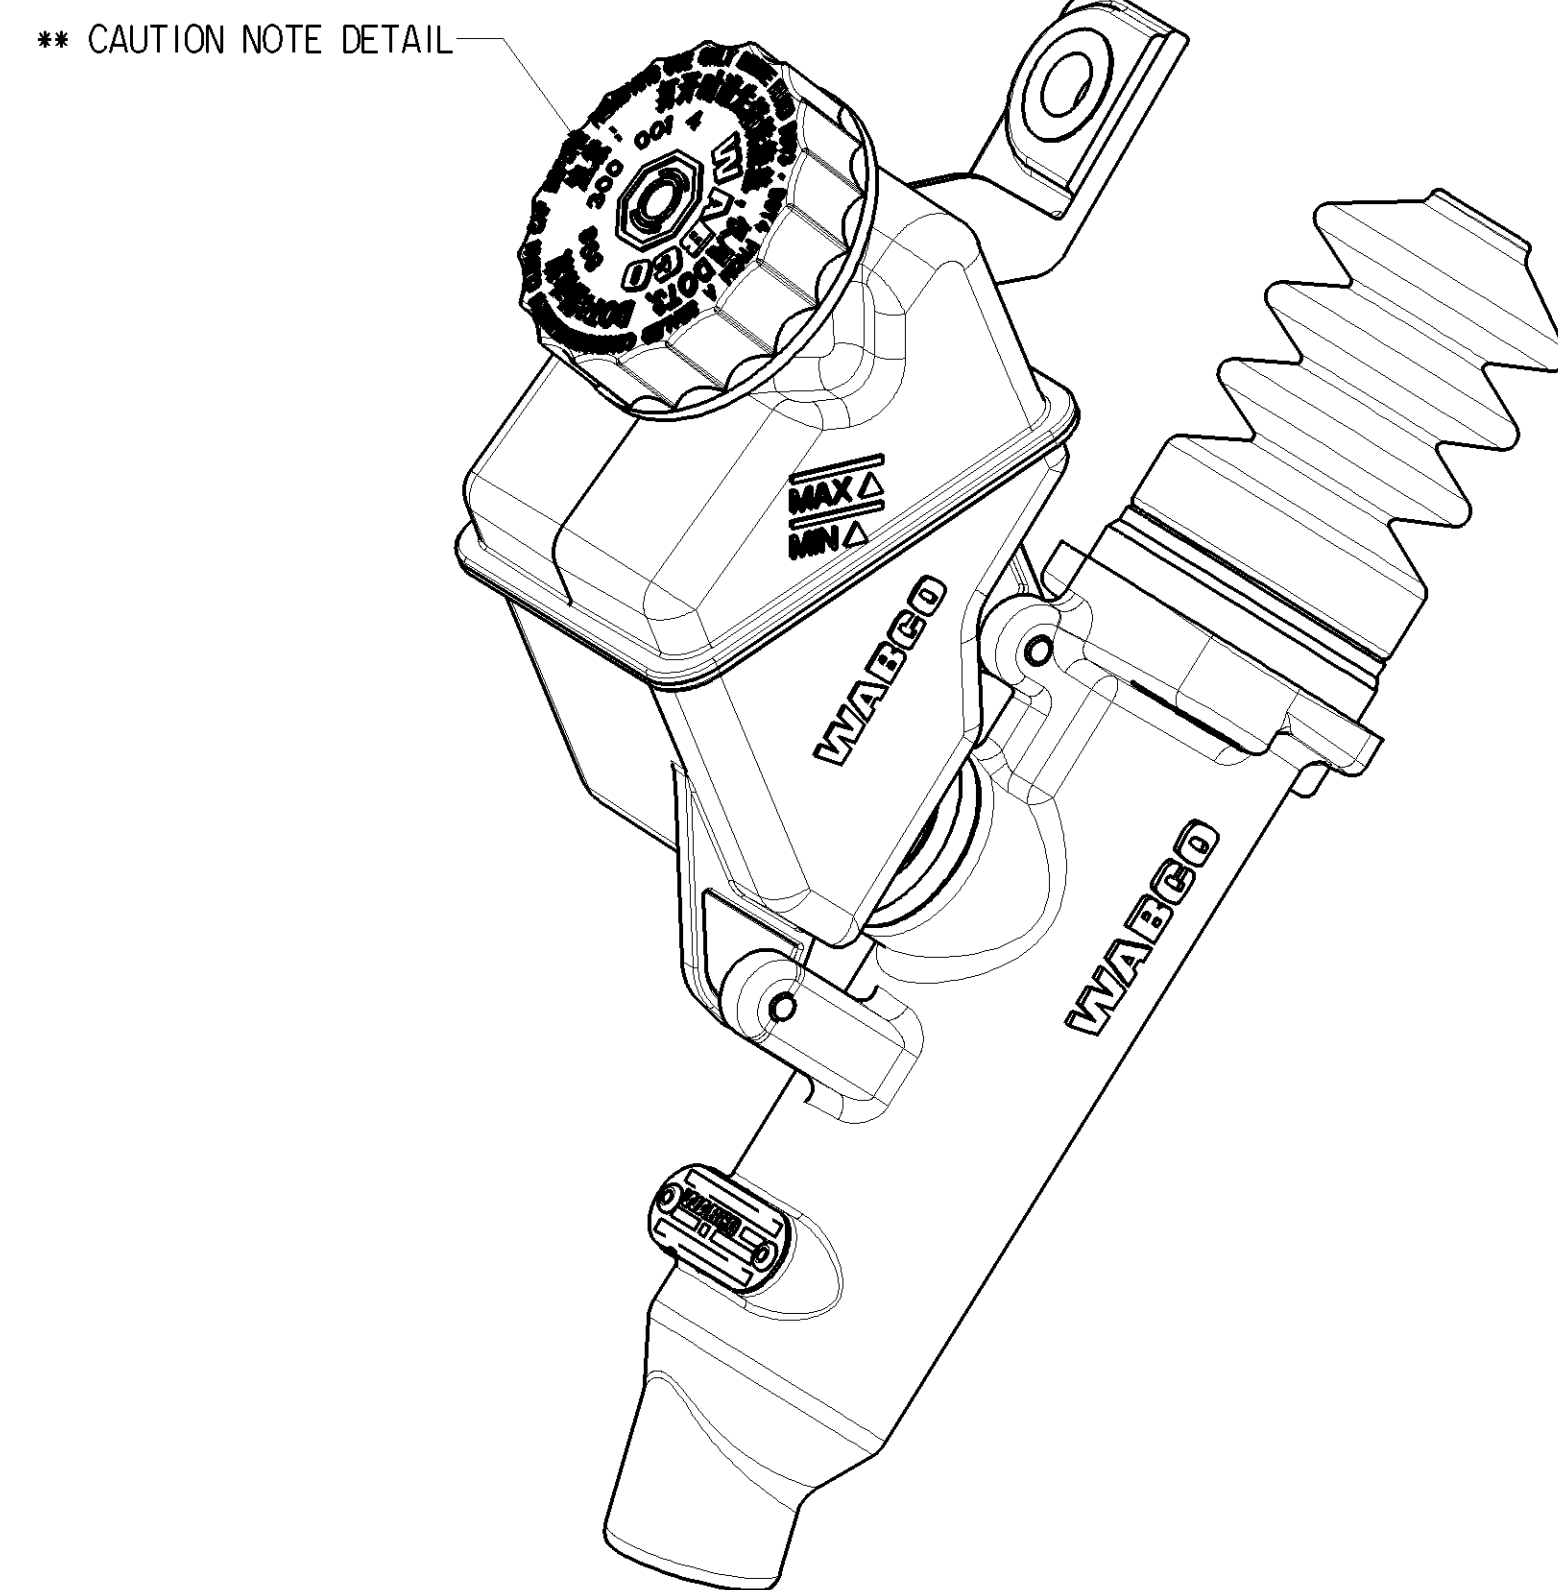
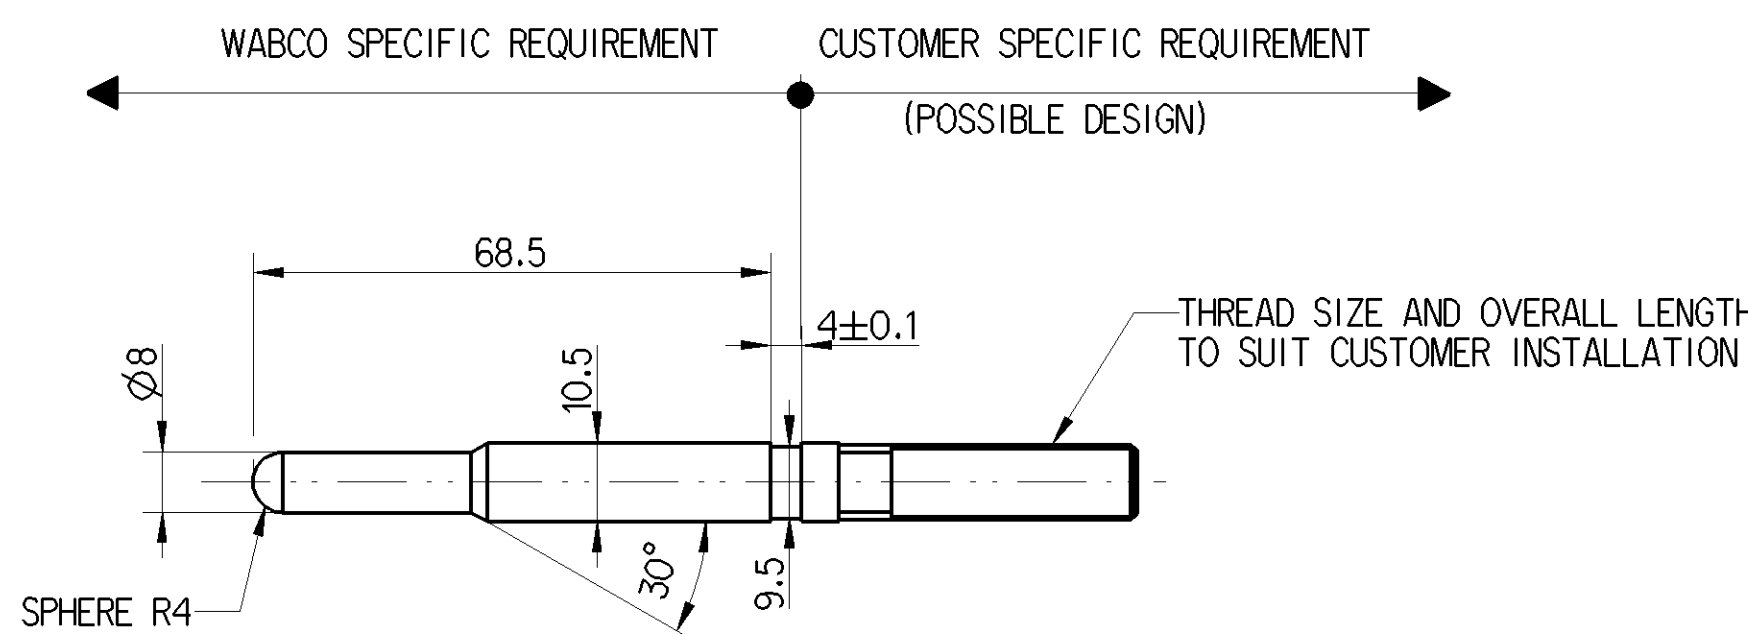
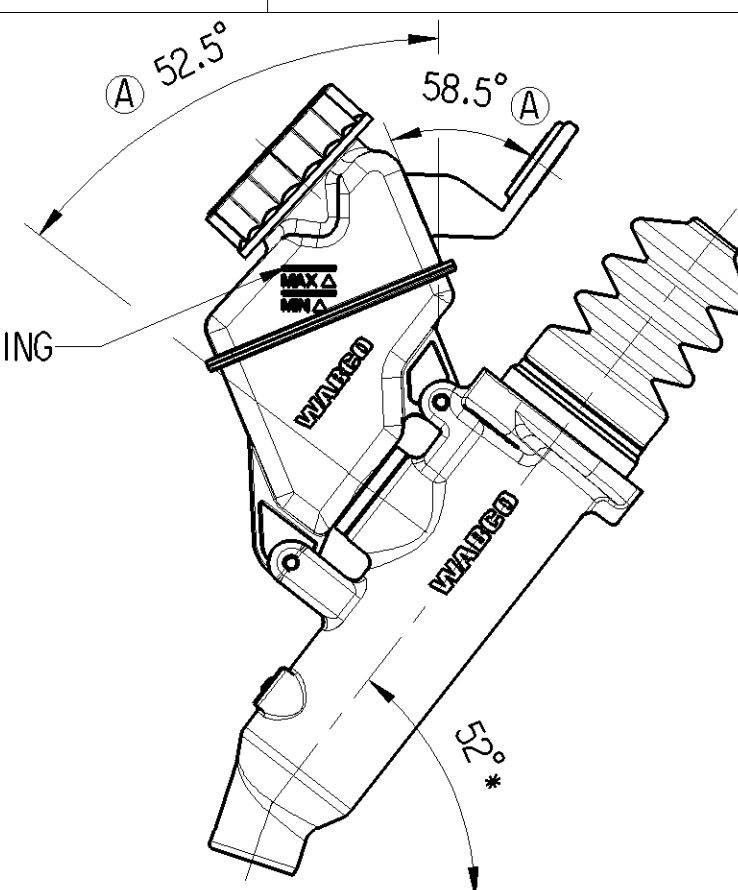
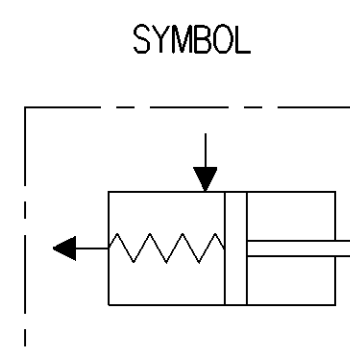


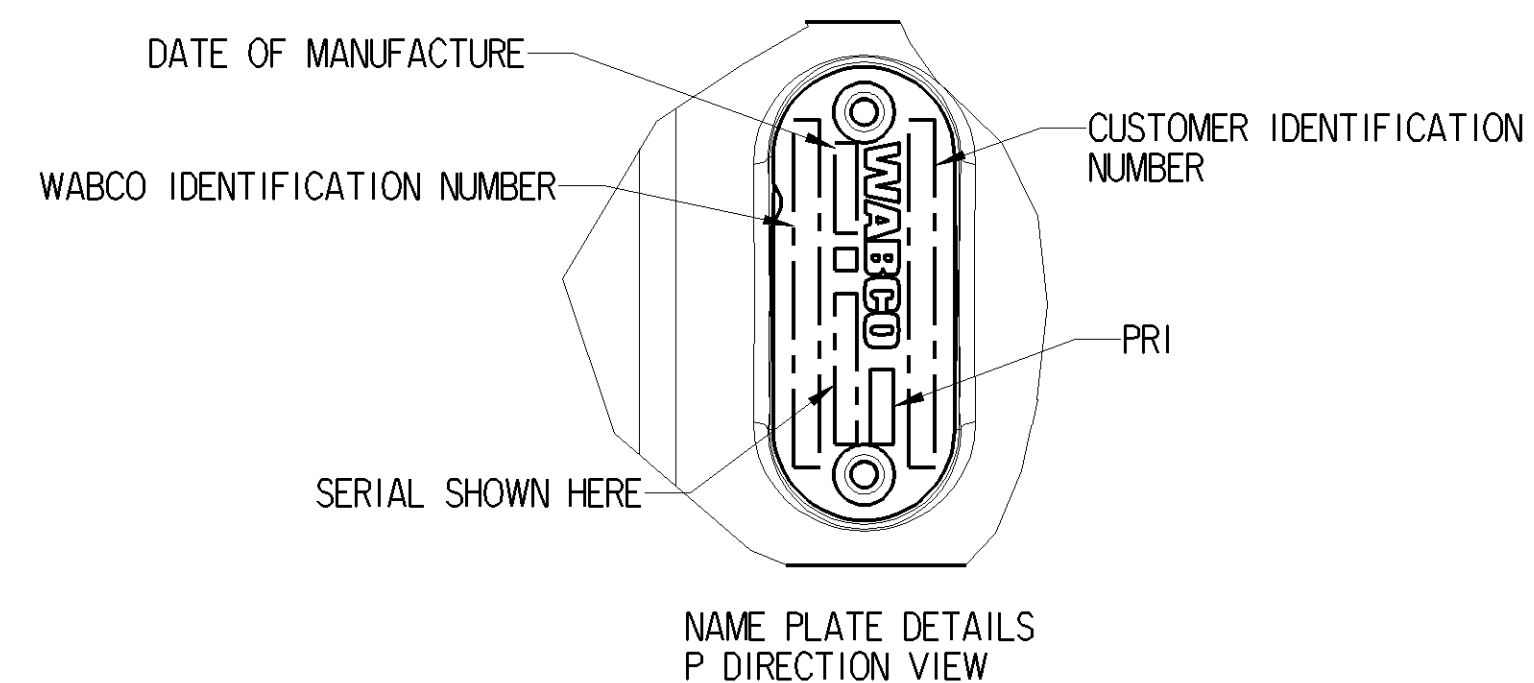

MARKING OF PORTS		P2	DELIVERED HYDRAULIC PRESSURE	NORMAL PRESSURE : 40 bar MAXIMUM PRESSURE : 120 bar	MAXIMUM FILLING PRESSURE	2,5 bar
12	OIL INLET				USABLE HYDRAULIC VOLUME	19,2 ⁺¹ ₋₁ cm ³
2	DELIVERY HYDRAULIC	HYDRAULIC FLUID	DOT3 - DOT4 SAE J 1703.	THERMAL RANGE	-40°C....+80°C	

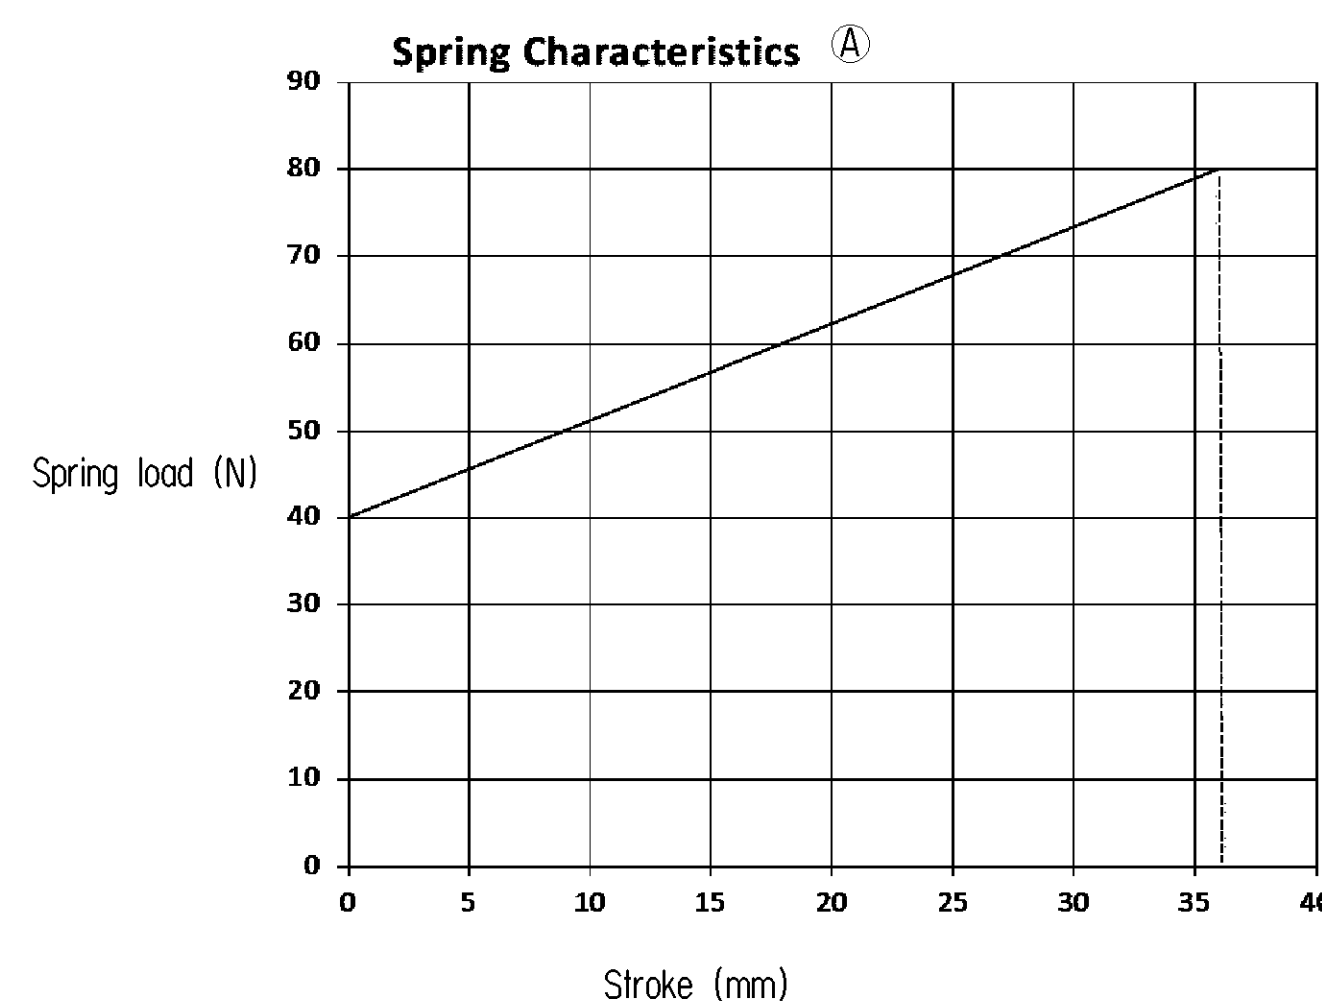

(ADDITIONAL 70° TILT ALLOWED
FOR CABIN TILTING)


* AS MOUNTED ON IPU

DELIVERY HYDRAULIC OPENINGS ARE FITTED WITH CLOSURE PLUG FOR STORAGE AND TRANSIT PURPOSES.

— .. — .. — BREATHING PATH.

① THE BRACKET SHOULD NOT BE STRESSED WHILE MOUNTING

CUSTOMER TIGHTENING VALUES [Nm]		
CONNECTION	THREAD SIZE	TORQUE [Nm]
PORT 2	M14 X 1,5	22,5 ±2,5
CAP 12	--	2,5±1

General Specification: JED-334-1, Size ISO 44405 LP					Copyright WABCO®		WABCO			
Further Technical Data:					Date		Signature			
Doc. Code:		Sheet:		To		Drawn:				
General Tolerances JED-261					2017-03-24		Qishuang Li		MASTER CYLINDER	
Range of Nominal Dimensions (± mm)					2017-03-24		Provenkumar			
					Checked:					
					Expert:					
					Mass		Scale		Material No.	
					0.536 kg		1:1		Date of first issue: 2016-06-27	
					Size		CAD System		Doc. Code Language Sheet	
					470 053 060 0				005 EN 1/1	
Tapped Holes acc.					A 1 CREO				ECN-No. 173297 Revision 6 Techn. Desc. 5632	
1) Tolerance Class Applied Crossmarked									Replacement for /	