

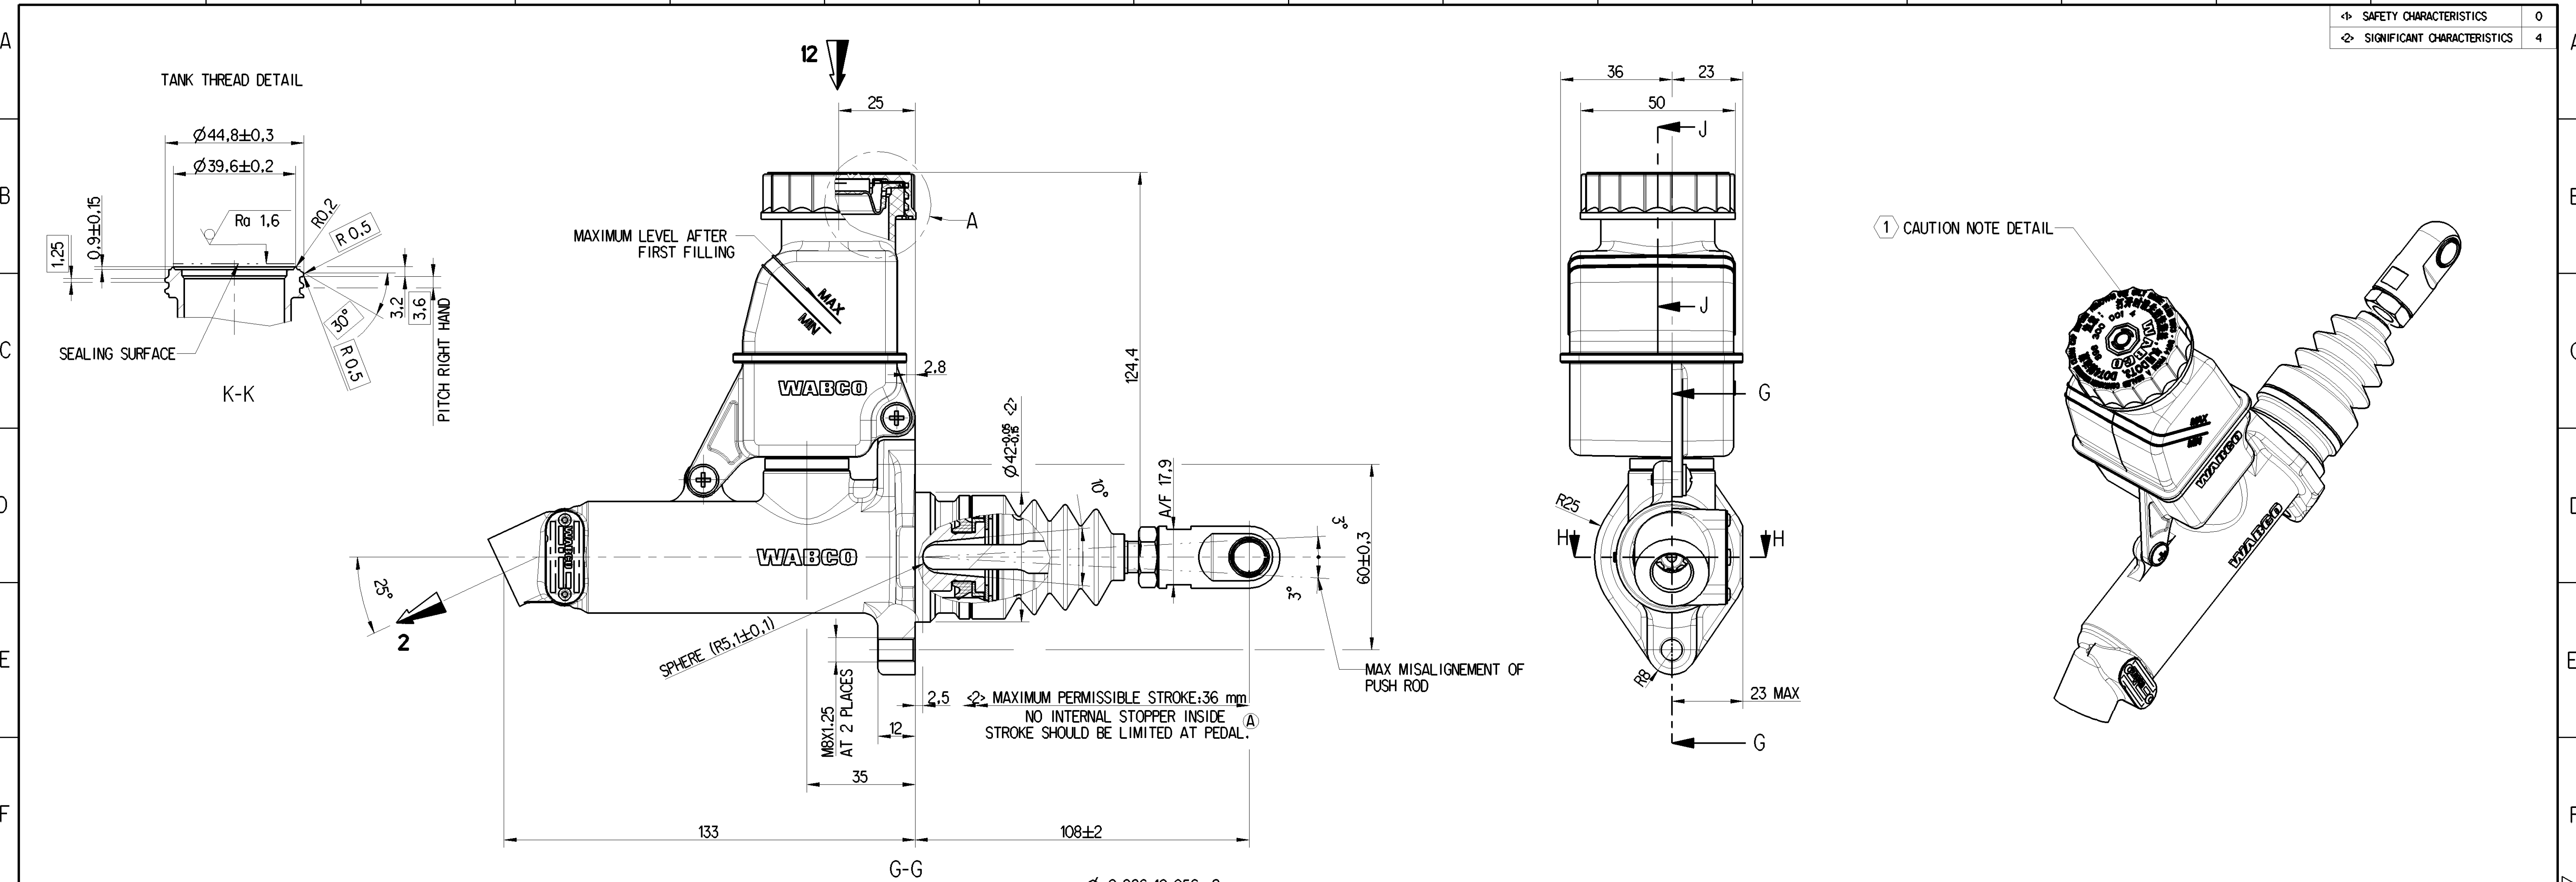


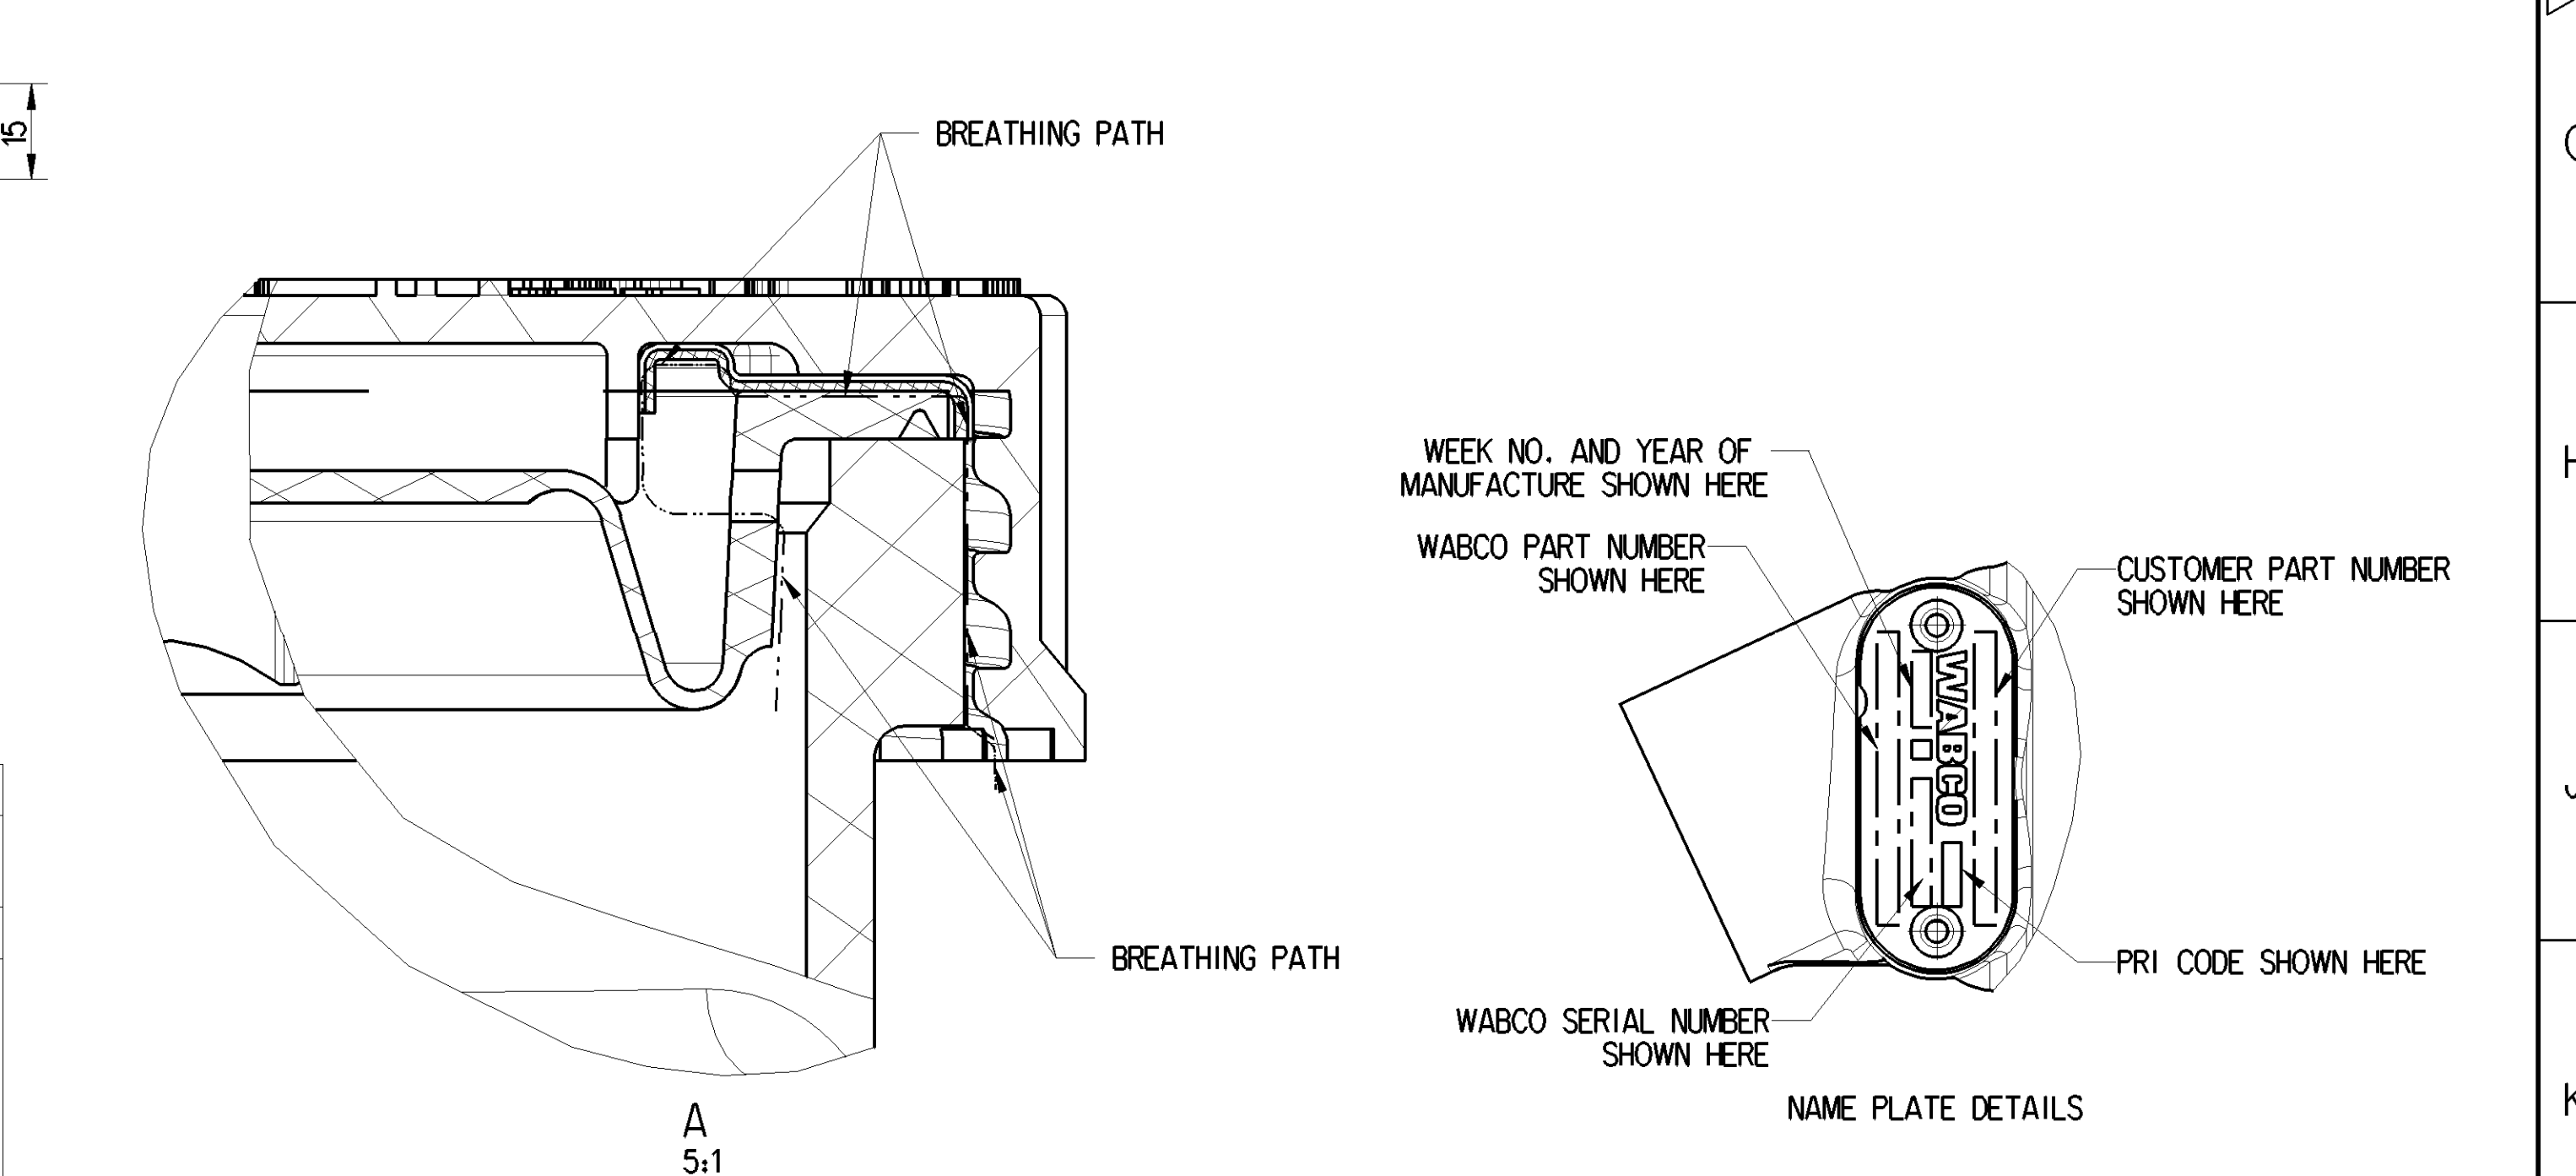

1 CAUTION NOTE DETAIL

WARNING CLEAN CAP BEFORE REMOVING.

USE ONLY BRAKE FLUID DOT3 - DOT4 FROM A SEALED CONTAINER.

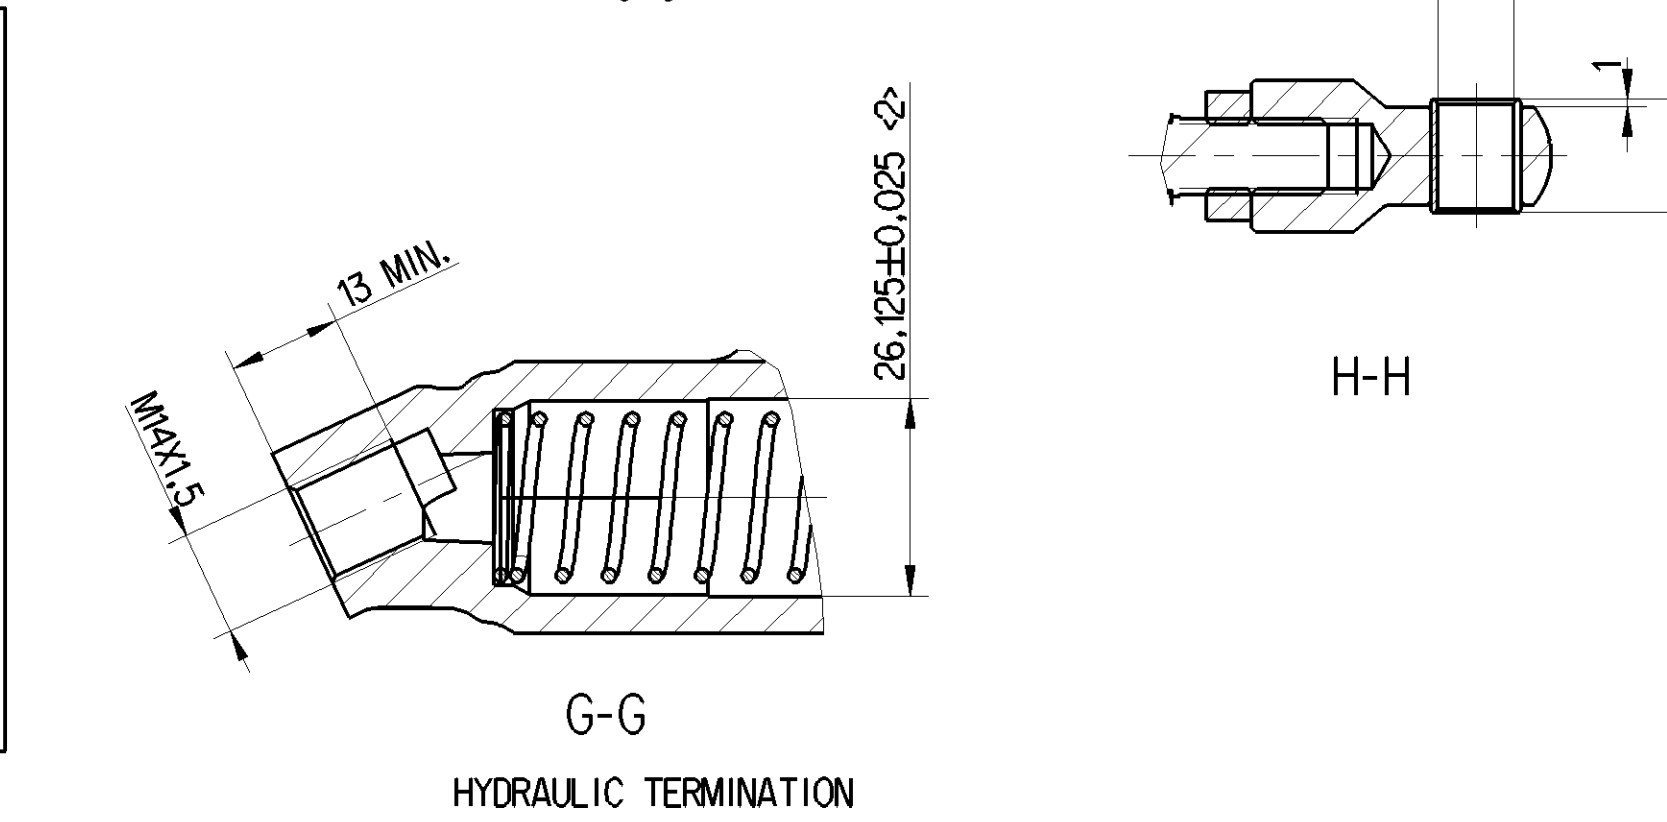

MARKING OF PORTS		P2 DELIVERED HYDRAULIC PRESSURE		NORMAL PRESSURE : 40 bar MAXIMUM PRESSURE : 120 bar		MAXIMUM FILLING PRESSURE USABLE HYDRAULIC VOLUME		2.5 bar 19,2 ⁺¹ ₋₁ cm ³	
12	OIL INLET								
2	DELIVERY HYDRAULIC	HYDRAULIC FLUID	DOT3 (SAE J 1703) - DOT4 (SAE J 1704).	THERMAL RANGE	-40°C....+80°C				

SYMBOL		WORKING POSITION	

(ADDITIONAL 50° TILT ALLOWED FOR CABIN TILTING)

2 AS MOUNTED ON IPU

OPEN PORT TO BE FITTED WITH CLOSURE PLUG (M14x1.5)
FOR STORAGE AND TRANSIT PURPOSES.

--- BREATHING PATH.

CUSTOMER TIGHTENING VALUES [Nm]		
CONNECTION	THREAD SIZE	TORQUE [Nm]
PORT 2	M14 X 1,5	22,5 ±2,5
MOUNTING BOLT	M8 X 1,25	21±4
LOCK NUT	M10X1.5	10±1
CAP 12	--	2,5±1

General Specifications: JED-334-1, Size ISO 14405 LP		Copyright WABCO®		WABCO	
Further Technical Data:		Date: 2018-08-13		Signature: Zhong	
Doc. Code: Sheet: To:		Checked: Zhong		MASTER CYLINDER	
General Tolerances JED-261		Expert: Proven.V		Material No. 470 053 096 0	
Range of Nominal Dimensions (± mm)		Mass: 0.627 kg		Date of first issue: 2017-12-14	
Class 1) ≤ 50		Scale: 1:1 (5:1)		Doc. Code: 005	
Fine 0.5		Size: 1:2 (2:1)		Language: EN	
Medium 1.0		Size: 1:2 (2:1)		Sheet: 1/1	
Coarse 2.0		Size: 1:2 (2:1)		Revision: 1x	
Tapped Holes acc. JED-152		Tech. Resp. 5632		Replacement for:	
1) Tolerance Class Applied Crossmarked		A 1 CREO		177908	