

THE VALVE CORRESPONDS TO THE REGULATIONS FOR ELECTROMAGNETIC DEVICES ACCORDING TO VDE 0580
DAS GERAET ENTSPRICHT DEN BESTIMMUNGEN FUER ELEKTROMAGNETISCHE GERAETE NACH VDE 0580
LE VALVE CORRESPOND AUX CONDITIONS POUR DES APPAREILS ELECTROMAGNETIQUES SUIVANT VDE 0580
LA VALVOLA CORRISPONDE ALLE CONDIZIONI PER APPARECCHI ELETTROMAGNETICHI SECONDO VDE 0580

```
VOLTAGE      :  
SPANNUNG     :  
VOLTAGE      : 10.8...28.8V DC  
VOLTAGGIO    :
```

NOMINAL CURRENT	:	
NENNSTROM	:	330mA , 10.8V
COURANT NOMINAL	:	870mA , 28.8V
CORRENTE NOMINALE	:	

RELATIVE DUTY CYCLE :
RELATIVE EINSCHALTDAUER: 100% ED
PLAGE DE UTILISATION :
DURATE DELL'INSERIMENTO:

```

PROTECTION CLASS      :
SCHUTZKLASSE          :
CLASSE DE PROTECTION  :   III
CLASSE DI PROTEZIONE   :

```

WITH SEALED CONNECTIONS 1,2,3,4
MIT ABGEDICHTETEN ANSCHLUESSEN 1,2,3,4
AVEC CONNEXIONS ETANCHEES 1,2,3,4
CON CONNESSIONI SIGILLATI 1,2,3,4

1 SUPPLY
ENERGIEZUFLUSS VOM VORRAT
ALIMENTATION
ALIMENTAZIONE

3 EXHAUST ANSCHLUSS ATMOSPHAERE ECHAPPEMENT SCARICO


4 ELECTRICAL CONTROL ELEKTRISCHER STEUERANSCHLUSS COMMANDE ELECTRIQUE COMANDO ELETTRICO

* MATERIAL :		SURFACE PROTECTION SILVER PLATED , THICKNESS = 1µm
WERKSTOFF :	JED-076 M1	ÖBERFLÄCHENSCHUTZ Gal Ag 1µm
MATIERE :		PROTECTION DE SURFACE ARGENTURE ELECTRIQUE , EPAISSEUR = 1µm
MATERIALE :		PROTEZIONE SUPERFICI , ARGENTURA ELETTRICA , SPESSORE = 1µm

```

      SOCKET :
** GERAETESTECKDOSE :      894 100 030 2
  PRISE DE COURANT :
  PRESA DI CORRENTE :

```

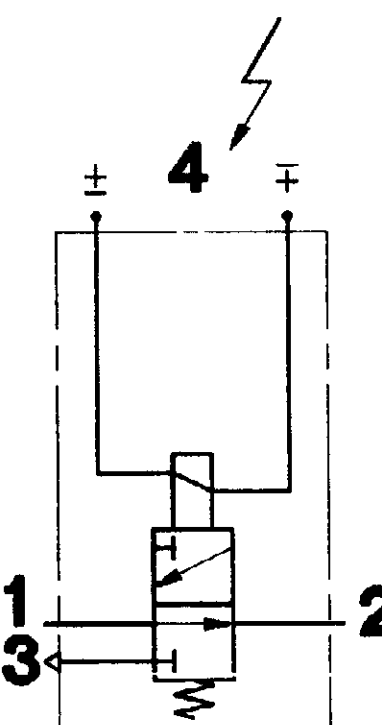

FURTHER TECHNICAL DATA SEE										COPYRIGHT		WABCO		CLAYTON DEWMORE	
IDENTIFICATION NO.										DATE SIGNATURE					
CODE FOR DOCUMENT: 605 SHEET: TO										DRAWN BY 90-02-21 WEBER		3/2 SOLENOID VALVE			
GENERAL TOLERANCES										CHECKED BY 90-02-21 ROWLAND		3/2 MAGNETVENTIL			
RANGE OF NOMINAL DIMENSIONS (± mm)										STANDARDIZATION 90-02-21 PANZER		ELECTROVALVOLA 3/2			
CLASS			> 50	> 180	> 180	> 400					MASS SCALE	PRODUCT IDENTIFICATION NO.			
I	1)	≤ 50	1,0	1,5	2,0	± 3'					= 0,5 kg	1 : 1	472 102 740 0		CODE FOR DOCUMENT SHEET
II	X	1,0	2,0	3,0	4,0						SIZE I.T.I.			605	1/1
III		2,0	3,5	5,0	6,5						A 1	142		CODE F.PROD. GROUP	REPLACEMENT FOR
TAPPED HOLES ACC. ISO 4039 / JED-162														580	
1) TOLERANCE CLASS APPLIED CROSSMARKED						DCN-NO.		REV.		DATE					
9										10mm		EXPERT CODE		712/6	
														012X	