

MEDIUM : AIR	VOLTAGE :
MEDIUM : LUFT	SPANNUNG : 24 ⁺⁶ _{-6.5} V DC
FLUIDE : AIR	VOLTAGE :
FLUIDO : ARIA	VOLTAGGIO :
COIL RESISTANCE :	NOMINAL CURRENT :
SPULENWIDERSTAND : R ₂₀ = 58±4 Ω	NENNSTROM : 0.41 A
RESISTANCE DE BOBINE :	COURANT NOMINAL :
RESISTENZA DELLA BOBINA :	CORRENTE NOMINALE :
PERMISSIBLE PRESSURE :	NOMINAL PERFORMANCE :
ZULAESSIGER DRUCK : pe < 13 bar	NENNLEISTUNG : 9.9W
PRESSION ADMISSIBLE :	PUISSANCE NOMINAL :
PRESSIONE AMMISSIBILE :	POTENZA NOMINALE :
WORKING PRESSURE :	RELATIVE DUTY CYCLE :
BETRIEBSDRUCK : pe = 0...11 bar	RELATIVE EINSCHALDBAUER : 100%
PRESSION D'UTILISATION :	PLAGE DE UTILISATION :
PRESSIONE AMMISSIBILE :	DURATE DELL' INSERIMENTO :
NOMINAL DIAMETER SUPPLY Ø2.2mm, EXHAUST Ø2.2mm	PROTECTION CLASS :
NENNWEITE BELUEFTUNG Ø2.2mm, ENTLUEFTUNG Ø2.2mm	SCHUTZKLASSE : III
DIAMETRE NOMINAL ALIMENTATION Ø2.2mm, ECHAPPEMENT Ø2.2mm	CLASSE DE PROTECTION :
DIAMETRO NOMINALE ALIMENTAZIONE Ø2.2mm, SCARICO Ø2.2mm	CLASSE DI PROTEZIONE :






THERMAL RANGE OF APPLICATION :		THERMISCHER ANWENDUNGSBEREICH : -40°C...+100°C	
PLAGE THERMIQUE D'APPLICATION :			
CAMPO DI APPLICAZIONE TERMICA :			
TYPE OF PROTECTION :	AND	WITH SEALED CONNECTIONS 1, 2, 3, 6	
SCHUTZART :	UND	MIT ABGEDICHTETEN ANSCHLUESSEN 1, 2, 3, 6	
MODE DE PROTECTION :	ET	AVEC CONNEXIONS ETANCHEES 1, 2, 3, 6	
TIPO DI PROTEZIONE :	E	CON CONNESSIONI SIGILLATI 1, 2, 3, 6	
POSITION OF INSTALLATION :	OPTIONAL	BUT WITHOUT SEALED CONNECTION 3	
EINBAULAGE :	BELIEBIG	JEDOCH OHNE ABGEDICHTETEN ANSCHLUSS 3	$\alpha = \pm 45^\circ$
POSITION D'INSTALLATION :	AU CHOIX	MAIS SANS CONNEXION ETANCHEE 3	
POSIZIONE DI MONTAGGIO :	A PIACERE	PURCHE SENZA CONNESSION SIGILLATI 3	®

1	SUPPLY	VOLTAGE PEAKS ON BREAKING	:
	ENERGIEZUFLOSS VOM VORRAT	ABSCHALTSPANNUNGSSPITZEN	: <1651V
	ALIMENTATION	VOLTAGE DEDE POINTE ALA RUPTURE	:
	ALIMENTAZIONE	VOLTAGGI DELLE PUNTE ALLA ROTTURA	:

2 DELIVERY ENERGIEABFLUSS IN DIE ARBEITSLEITUNG UTILISATION MANDATA

3 EXHAUST
ANSCHLUSS ATMOSPHAERE
ECHAPPEMENT
SCARICO

6 ELECTRIC TERMINAL
ELEKTRISCHER ANSCHLUSS
BORNE ELECTRIQUE
MORSETTI ELETTRICI

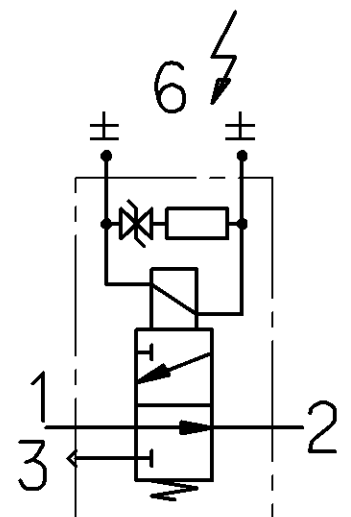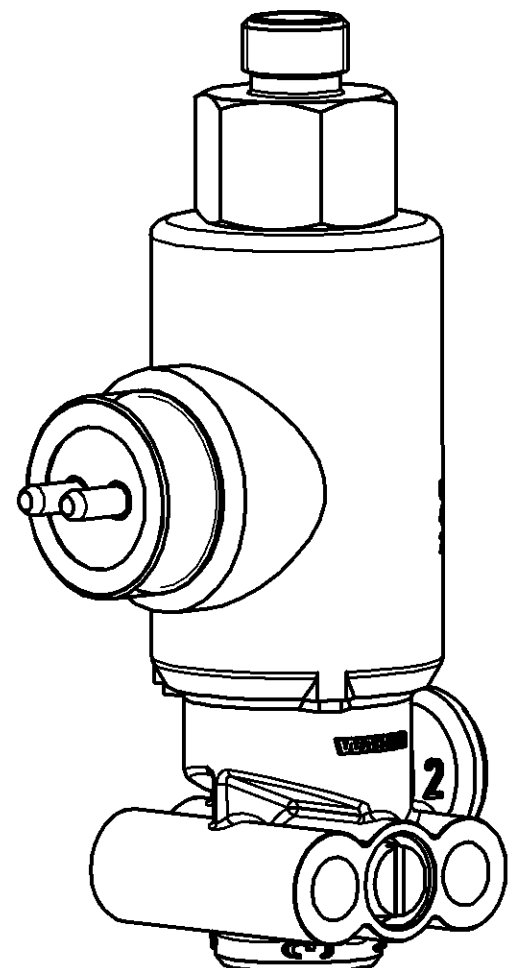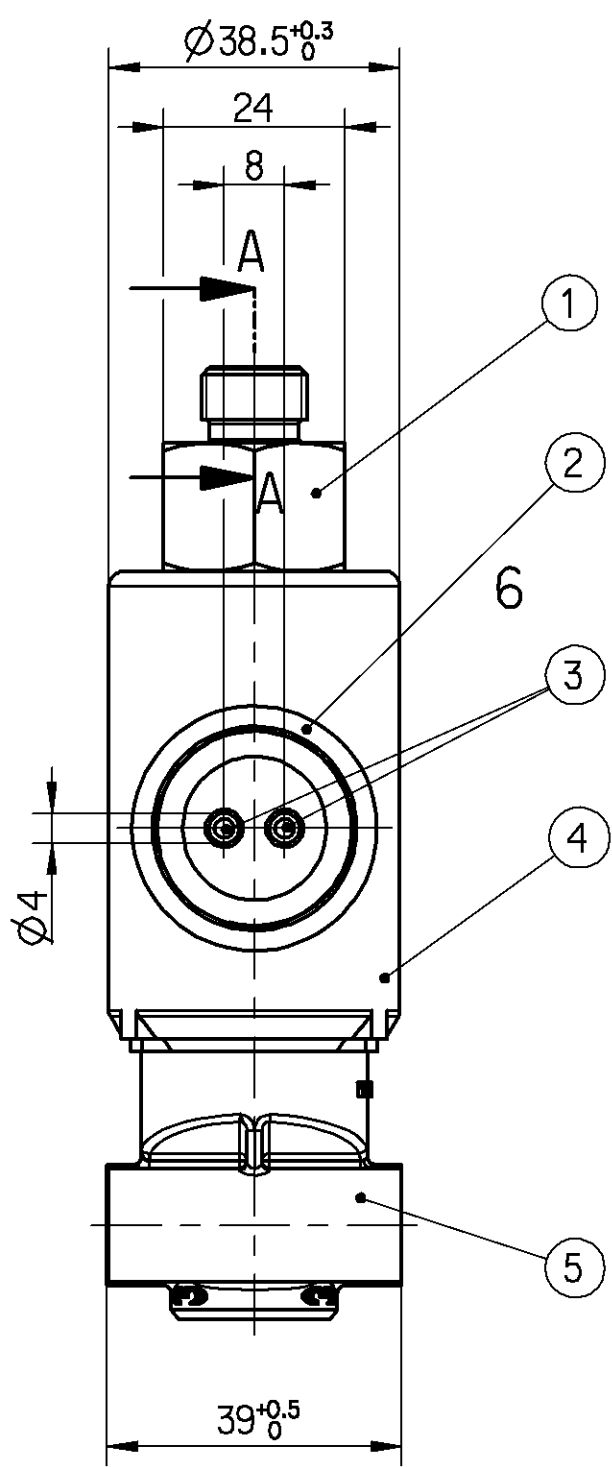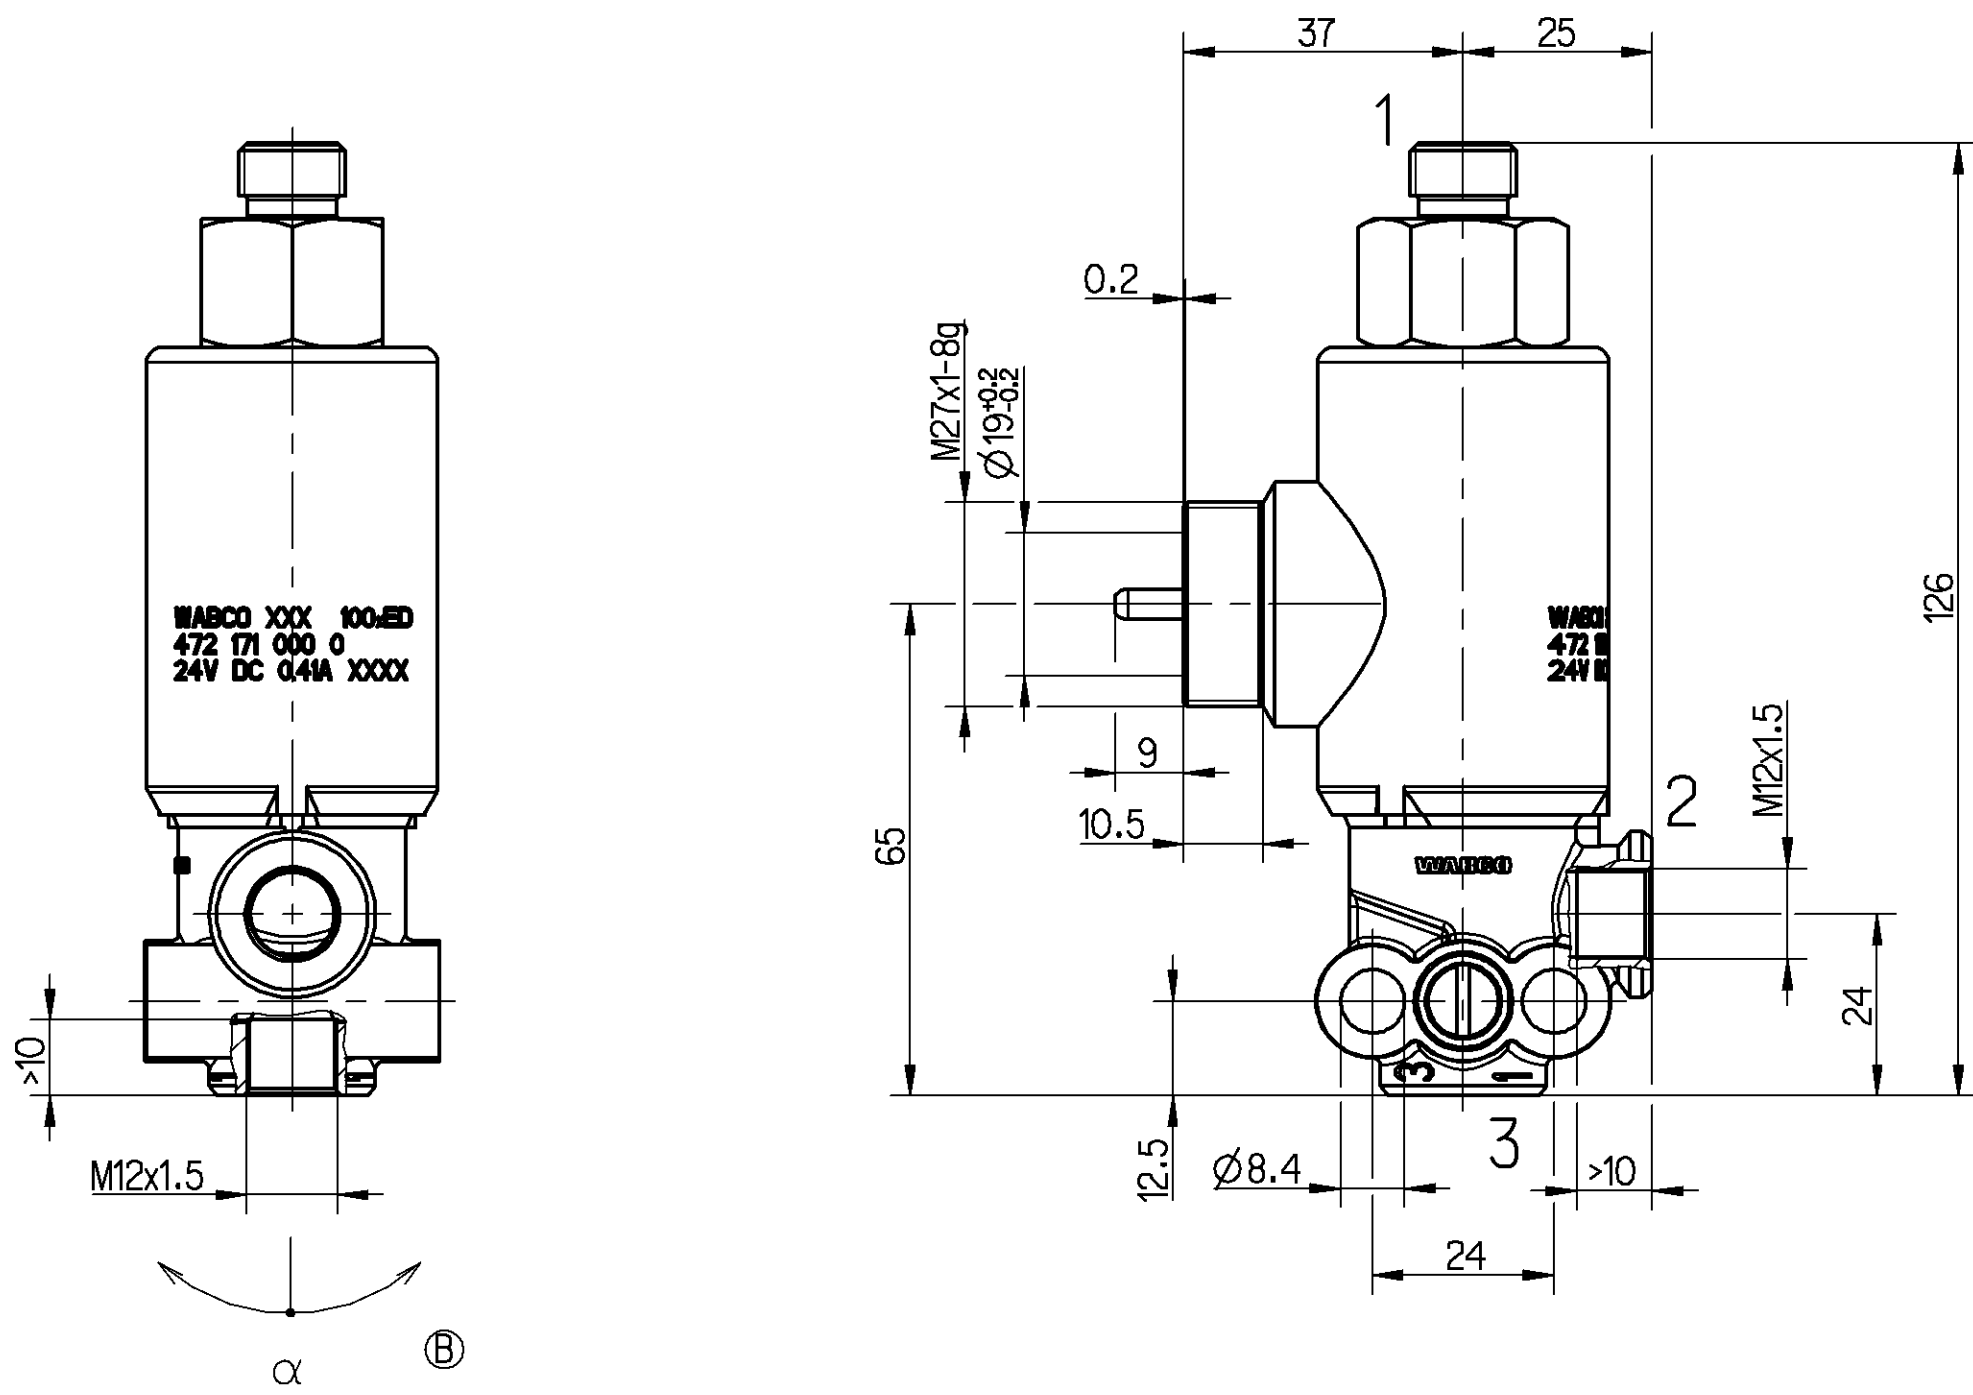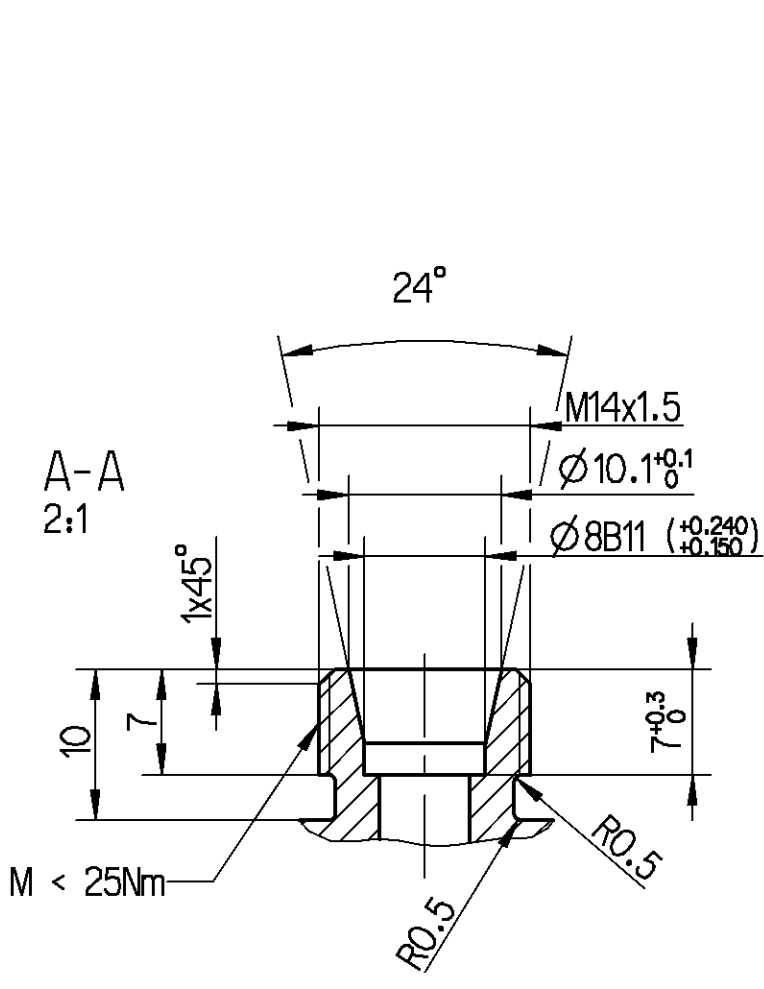

	MATERIAL / SURFACE PROTECTION WERKSTOFF / OBERFLÄCHENSCHUTZ MATERIALE / PROTEZIONE SUPERFICIALE	
①	JED-035M1	
②	JED-559	
③	JED-570.656	
④	JED-303	JED-739
⑤	JED-004M	JED-260

GENERAL SPECIFICATION:		JED-334-0		Pro/ENGINEER DRAWING		WABCO	
FURTHER TECHNICAL DATA: 472 171 000 0 (B)				DATE			
DOC. CODE: 535		SHEET: 1 TO 9		SIGNATURE			
GENERAL TOLERANCES				DRAWN		3/2 SOLENOID VALVE 3/2 MAGNETVENTIL ELECTROVAVVINE 3/2 ELETTROVALVOLA 3/2	
RANGE OF NOMINAL DIMENSIONS (± mm)				02-04-19 Runge			
				CHECKED			
				02-04-19 Rovira			
				EXPORT CODE			
				7 2 6			
				MASS		PRODUCT IDENTIFICATION NO.	
				0,5		472 171 000 0	
				1,1			
				KG (2,1)			
				SIZE			
				TRI			
				FUNCTION CODE		SHAPE CODE	
				A 1		9 2	
				DATE		PRODUCT TYPE	
				02-04-19		472 171 000 0 of 96-03-20	
				REV.		REPLACEMENT FOR	
				DOH-NO.			
				081358			
				4x8			
				TAPPED HOLES ACC. ISO 4039 / JED-152			
				1) TOLERANCE CLASS APPLIED CROSSMARRIED			

COPIING OF THIS DOCUMENT AND GIVING IT TO OTHERS AND THE USE OR COMMUNICATION OF THE CONTENTS THEREOF, ARE FORBIDDEN IN WHOLE OR IN PART WITHOUT THE CONSENT OF THE PATENT OFFICE. THIS RESTRICTION WILL CONTINUE TO APPLY EVEN IF THE PATENT IS ABANDONED OR THE PATENT IS NOT GRANTED. THE PATENT OR REGISTRATION OF A UTILITY MODEL OR DESIGN THIS DOCUMENT IS THE SUBJECT OF COPYRIGHT.

[illegible]

Id.: 472T10000___A02 **see** **H** **Drw.: 472T10000___605**