


Non è permesso copiare, a fini di riproduzione, questo documento, né utilizzare il contenuto a fini di lucro o per scopi non autorizzati. Toute réimpression ou reproduction de ce document, à des fins de copie, est formellement interdite. Toute utilisation non autorisée du contenu est formellement interdite. All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means electronic or mechanical, including photocopying and recording, or by any information storage or retrieval system, without permission in writing from WABCO. Toute réimpression ou reproduction de ce document, à des fins de copie, est formellement interdite. Toute utilisation non autorisée du contenu est formellement interdite. All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means electronic or mechanical, including photocopying and recording, or by any information storage or retrieval system, without permission in writing from WABCO.









	MATERIAL WERKSTOFF	SURFACE PROTECTION OBERFLAECHENSCHUTZ
I	Al-casting alloy	Chromating
II	Al-casting alloy	Chromating
III	Al-casting alloy	Chromating
IV	Steel	Zinc chrome coating
V	EPOXY MC	-
VI	Copper - Zinc alloy	Tin coating
VII	Steel	Zinc nickel coating



- 1 CUSTOMER NO. OR COUNTRY OF ORIGIN
KUNDEN-NR. KZ ODER WARENURSPRUNGSLAND
- 2 WABCO LOGO
WABCO LOGO
- 3 RESPONSIBLE PRODUCTION (PRI)
VERANTWORTUNGSVOLLE PRODUKTION
- 4 DATE OF MANUFACTURE (WWYY)
HERSTELLDATUM (WWYY)
- 5 DATA CODING (IF REQUESTED)
DATENCODIERUNG (AUF WUNSCH)
- 6 OPTIONAL
BELIEBIG
- 7 WABCO IDENTIFICATION NUMBER
WABCO IDENTIFIKATIONS-NUMMER

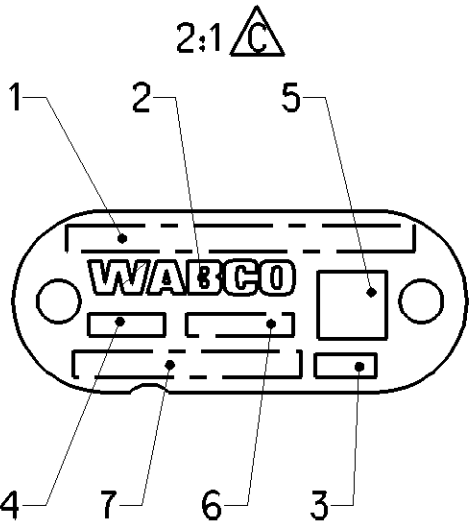

WORKING MEDIUM ARBEITSMEDIUM	AIR LUFT
NOMINAL VOLTAGE NENNSPANNUNG	$U_N = 24 \text{ V DC}$
NOMINAL CURRENT NENNSTROM	$I_N \leq 1.65 \text{ A}$
SERVICE CONDITION BETRIEBSART	DISCONTINUOUS SERVICE AUSSETZBETRIEB
TYPE OF PROTECTION SCHUTZART	COMPLETE DEVICE WITH MOUNTED COUPLING KOMPLETTES GERAET MIT MONTERTER KUPPLUNG
WORKING PRESSURE BETRIEBSDRUCK	$p_e = \text{MAX. } 11 \text{ bar}$
THERMAL RANGE OF APPLICATION THERMISCHER ANWENDUNGSBEREICH	$-40^\circ\text{C} \dots +80^\circ\text{C}$
FOR FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION	472 195 004 0

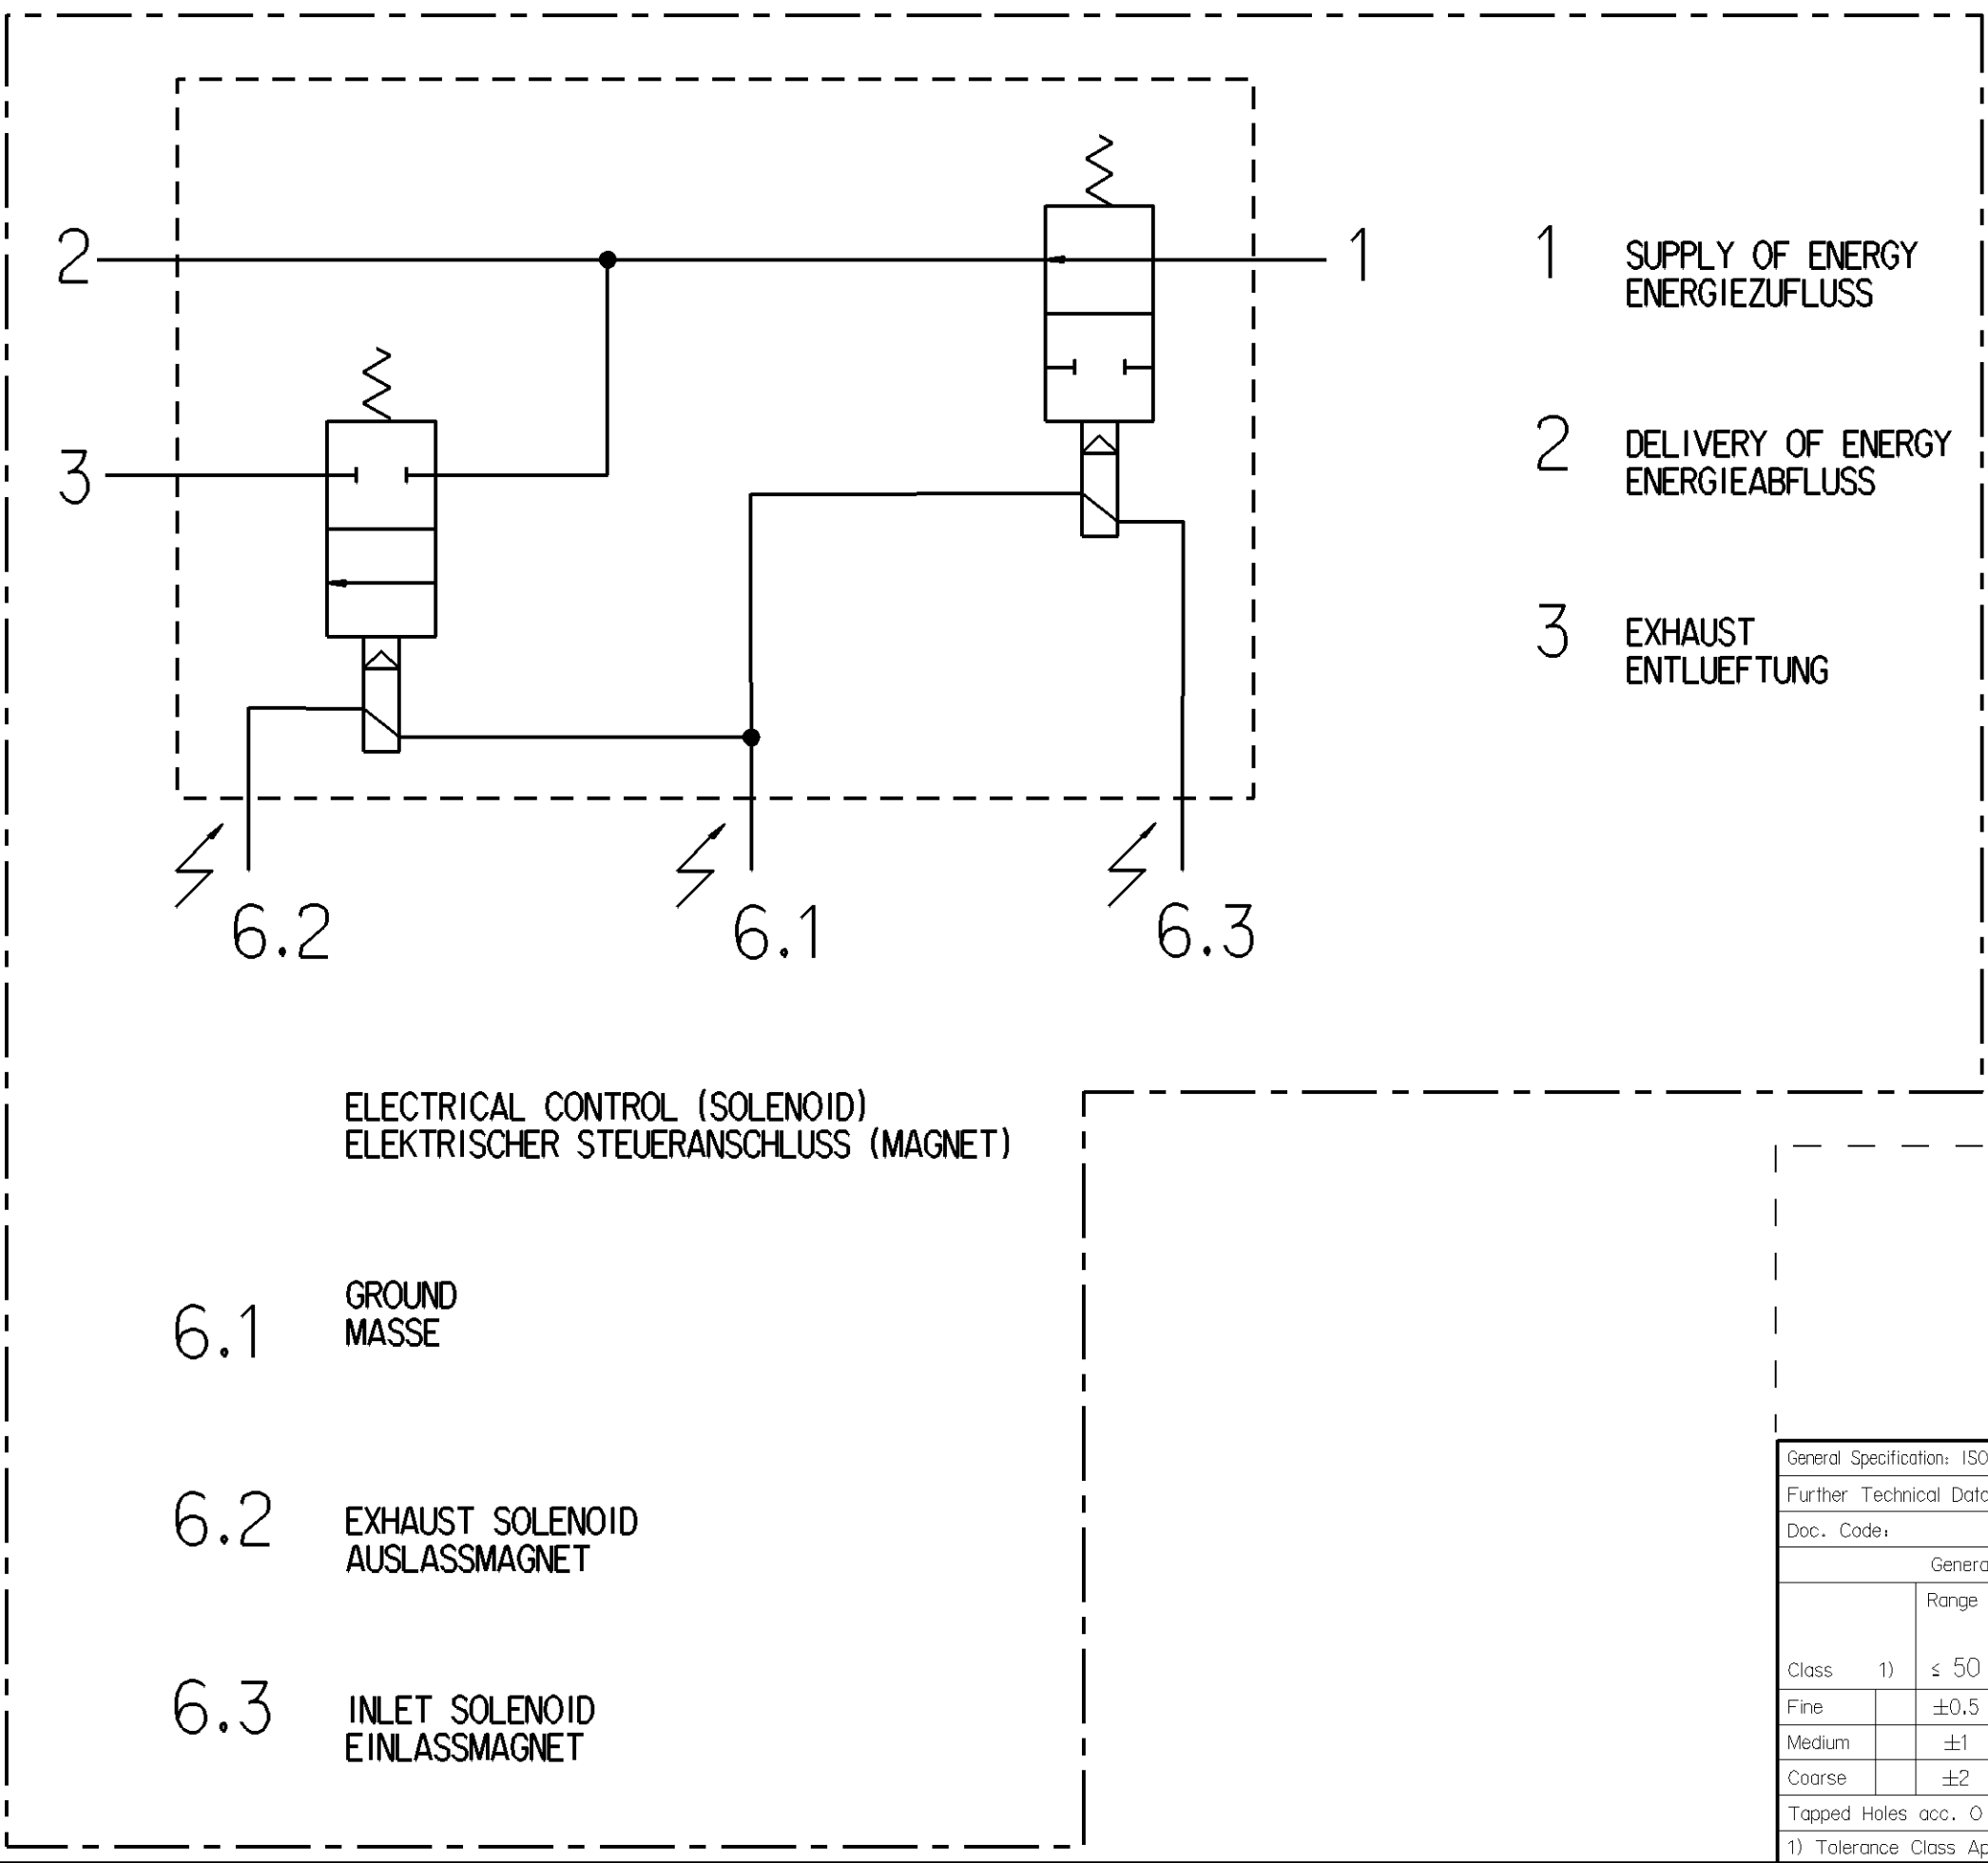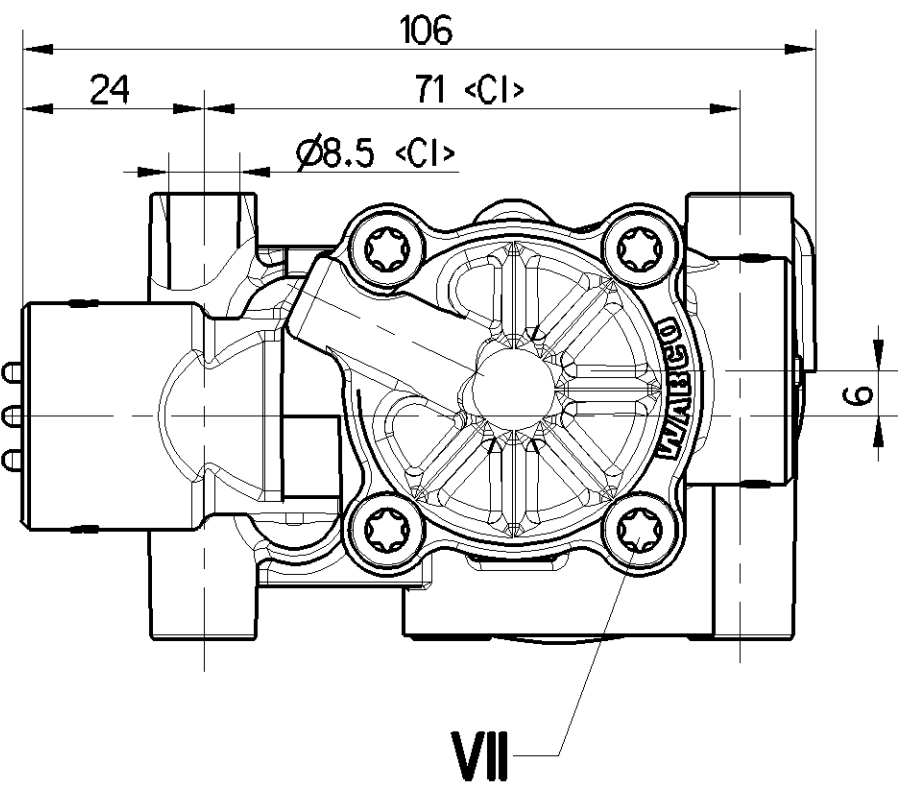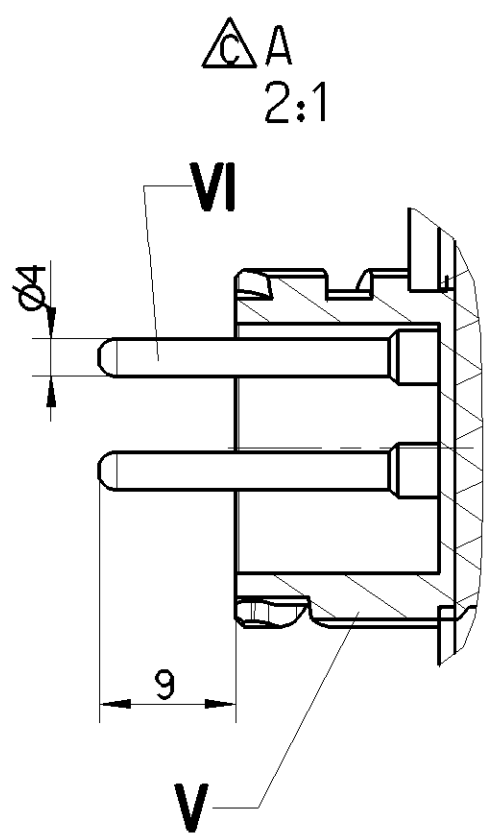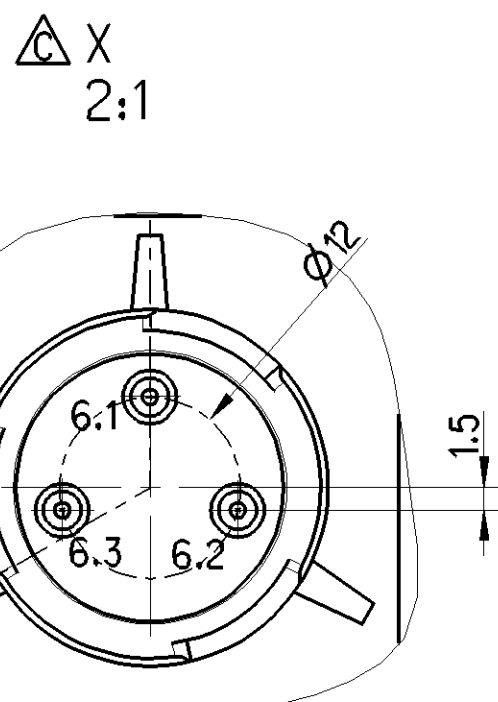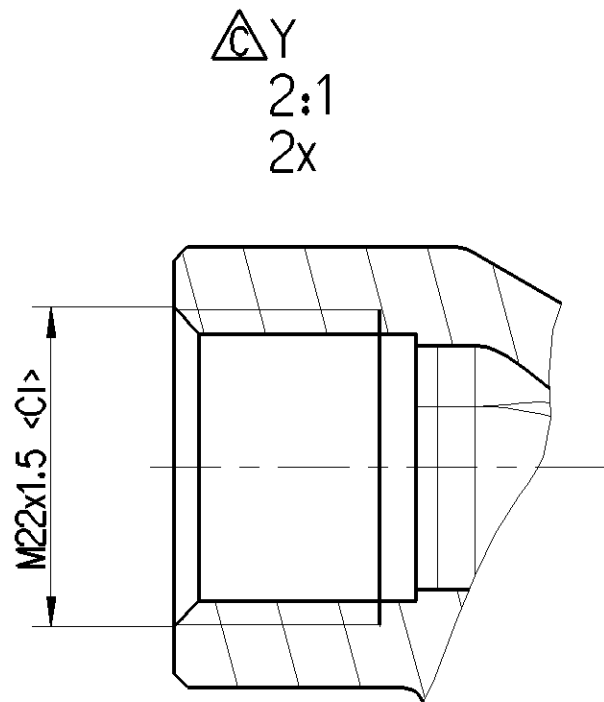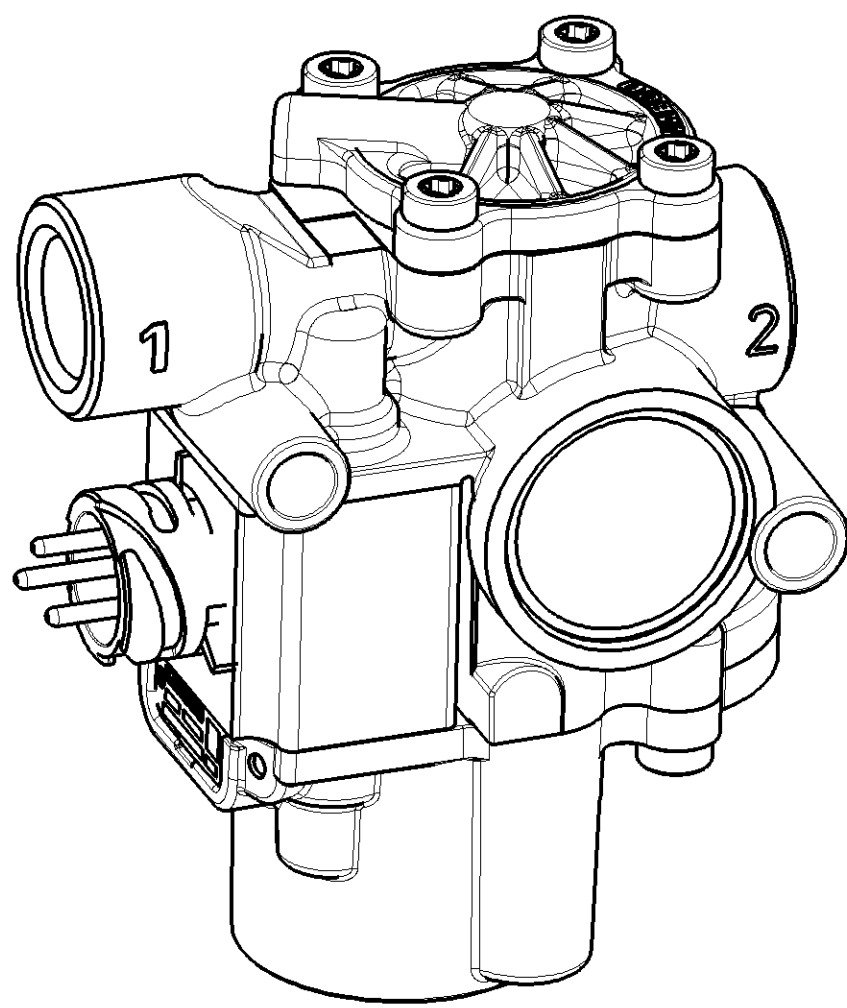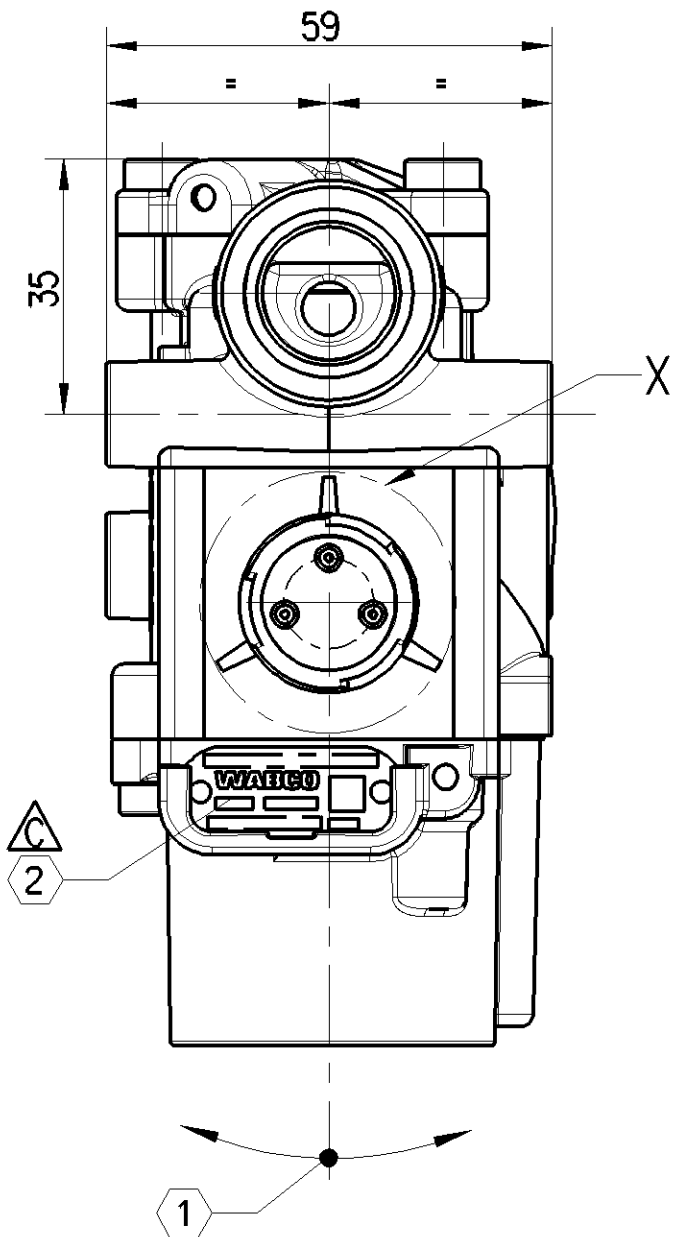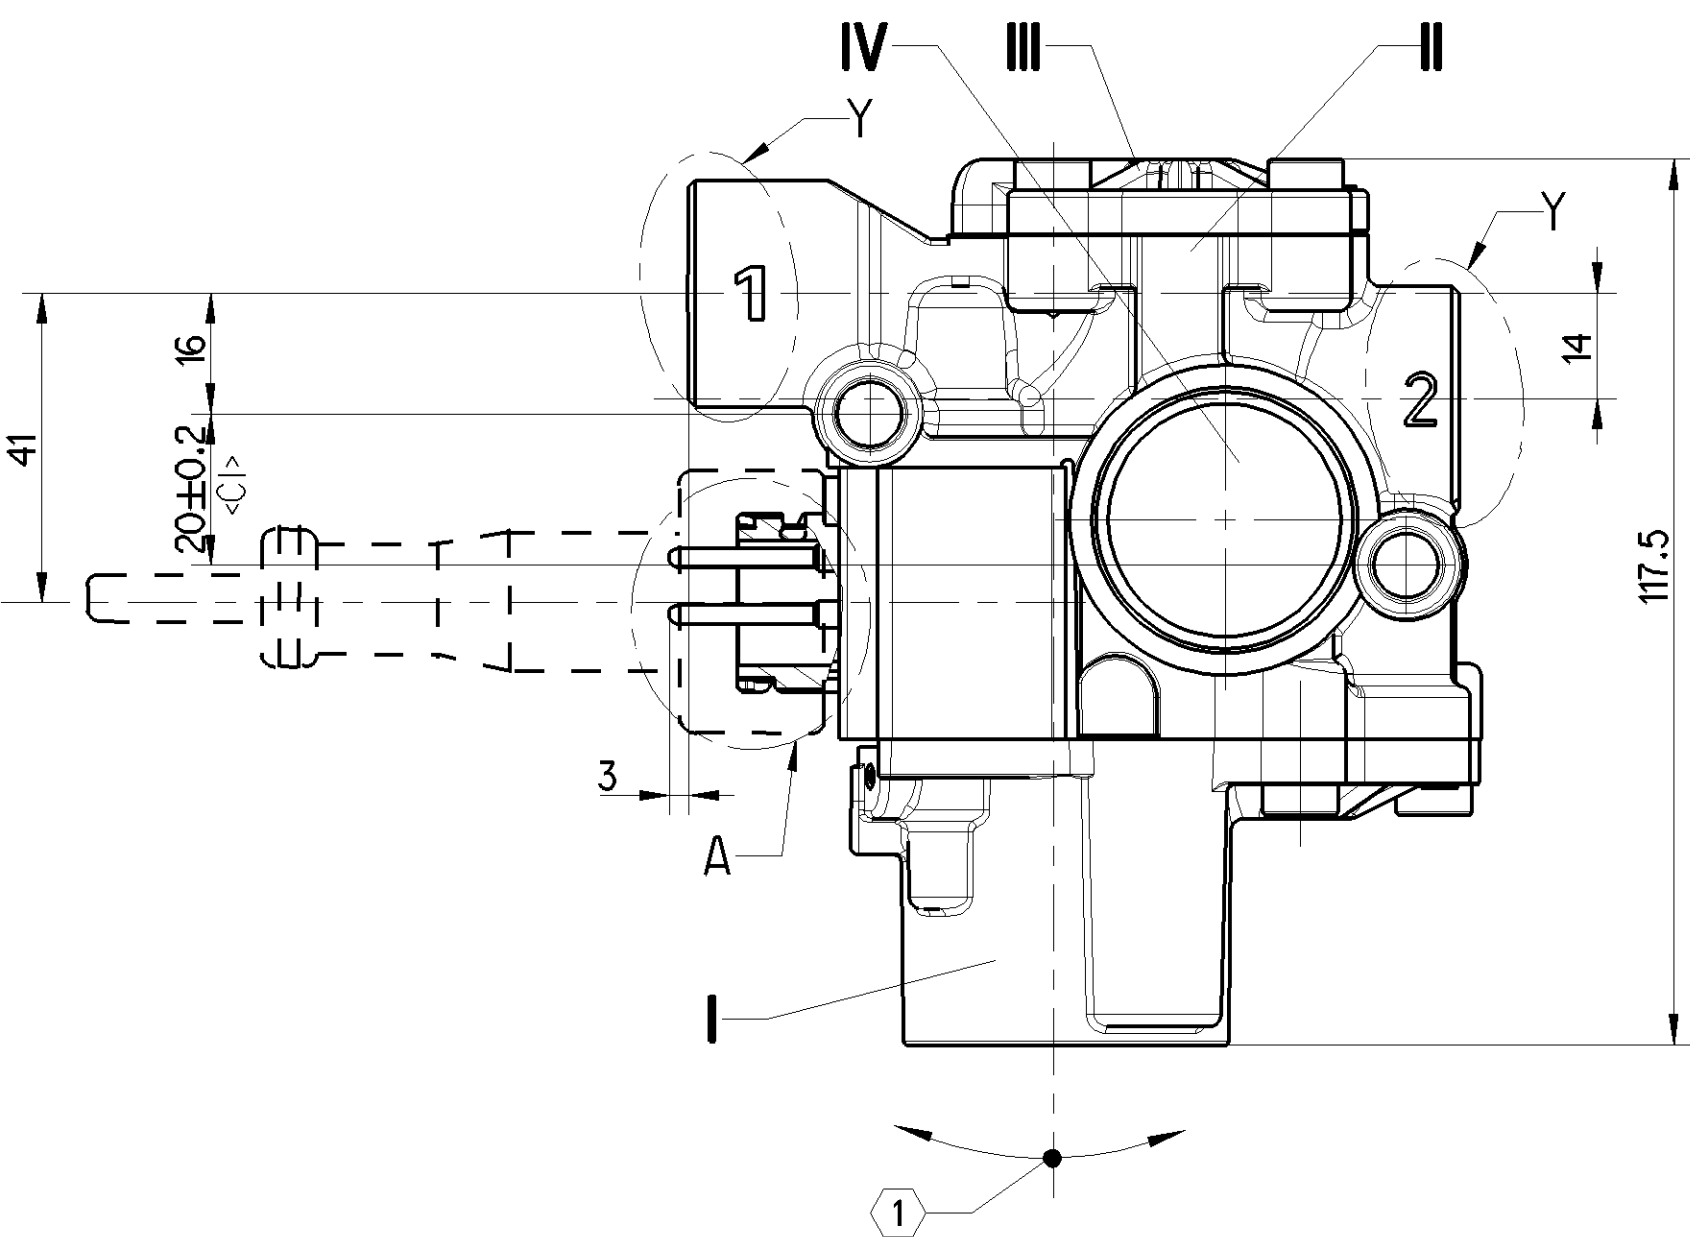

- 1 ADMISSIBLE INSTALLATION POSITION
ZULAESSIGE EINBAULAGE
- 2 IDENTIFICATION MARKING AREA SEE DOC. CODE 922
IDENTIFIZIERUNG MARKIERUNGSBERICH SIEHE DOC. CODE 922

General Specification: ISO 8015, JED-334-1, Size ISO 14406 LP		Copyright ZF®	
Further Technical Data:		Date	Signature
Doc. Code	Sheet	Drawn	Checked
General Tolerances JED-261		2023-07-27	
Range of nominal dimensions in mm		2023-07-27	
Class	1) ≤ 50 ≤ 50 ≤ 180 ≤ 400 > 400	Bialon	
Fine	± 0.5 ± 1 ± 1.5 ± 2	Dimensions in mm	
Medium	± 1 ± 2 ± 3 ± 4	Mass	
Coarse	± 2 ± 3.5 ± 5 ± 6.5	Scale	
Tapped Holes acc. 0		Size	
1) Tolerance Class Applied: Crossmarked		CAD System	
A 1		CREO	
Material No.		Date of first issue	
472 195 009 0		2023-07-27	
Revision		Tech. Resp.	
512593		6330_SV	
Doc. Code		Language	
005		ML	
Sheet		1/1	