
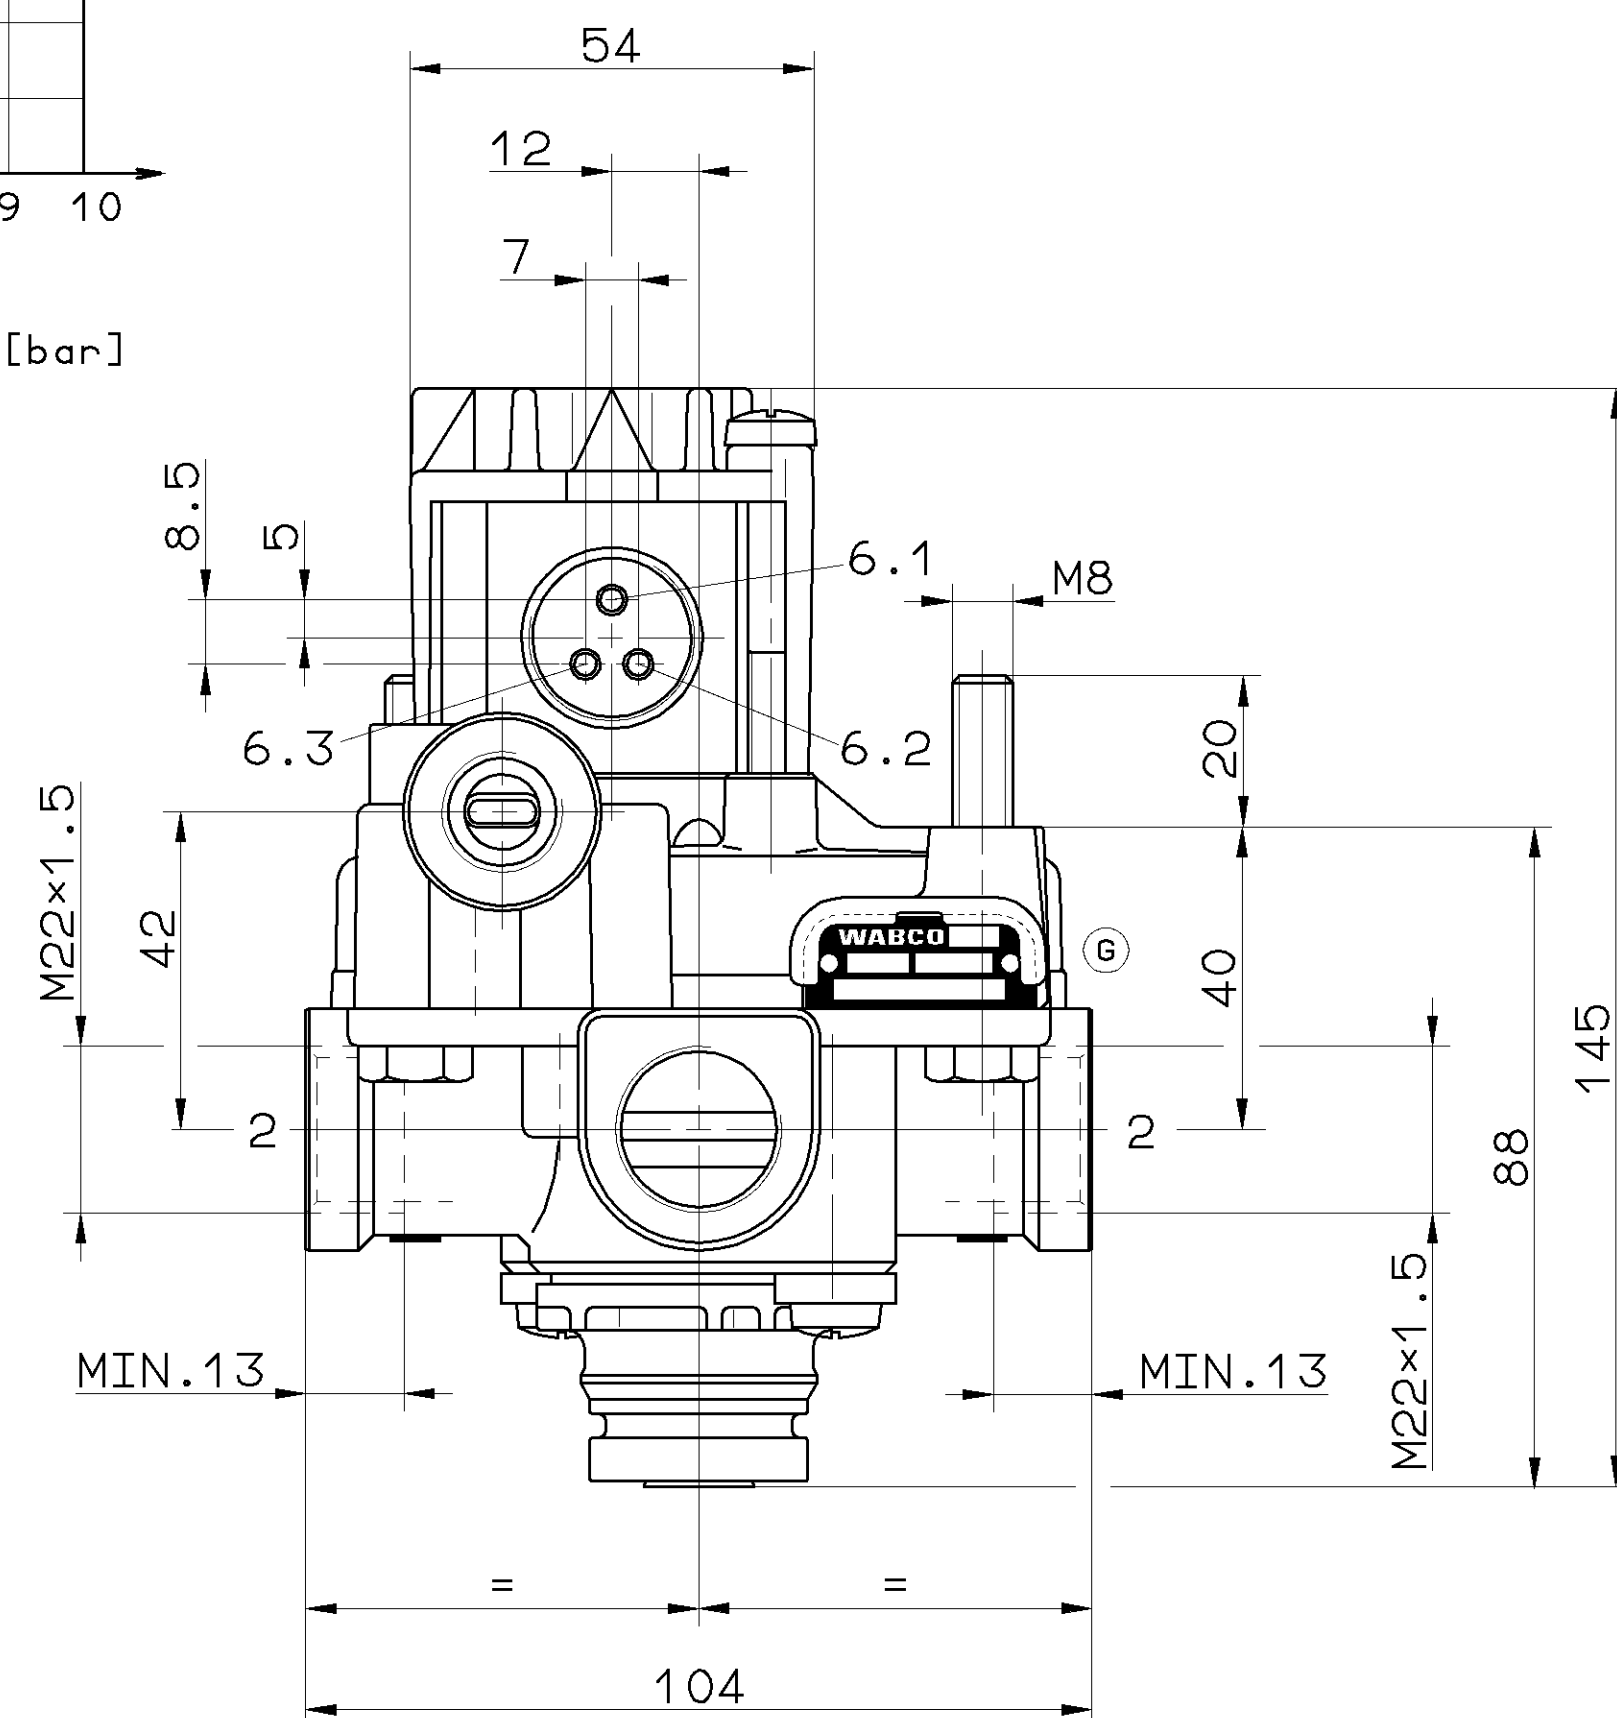
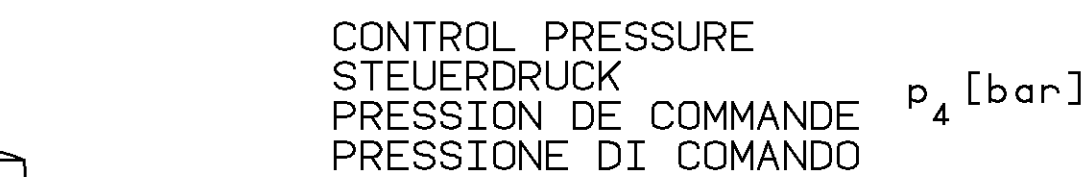


- 6.1** ELECTRICAL CONTROL (MAGNET)
6.2 ELEKTRISCHER STEUERANSCHLUSS (MAGNET)
6.3 COMMANDE ELECTRIQUE (AIMANT)
6.3 COMMANDO ELECTRICO (MAGNETE)

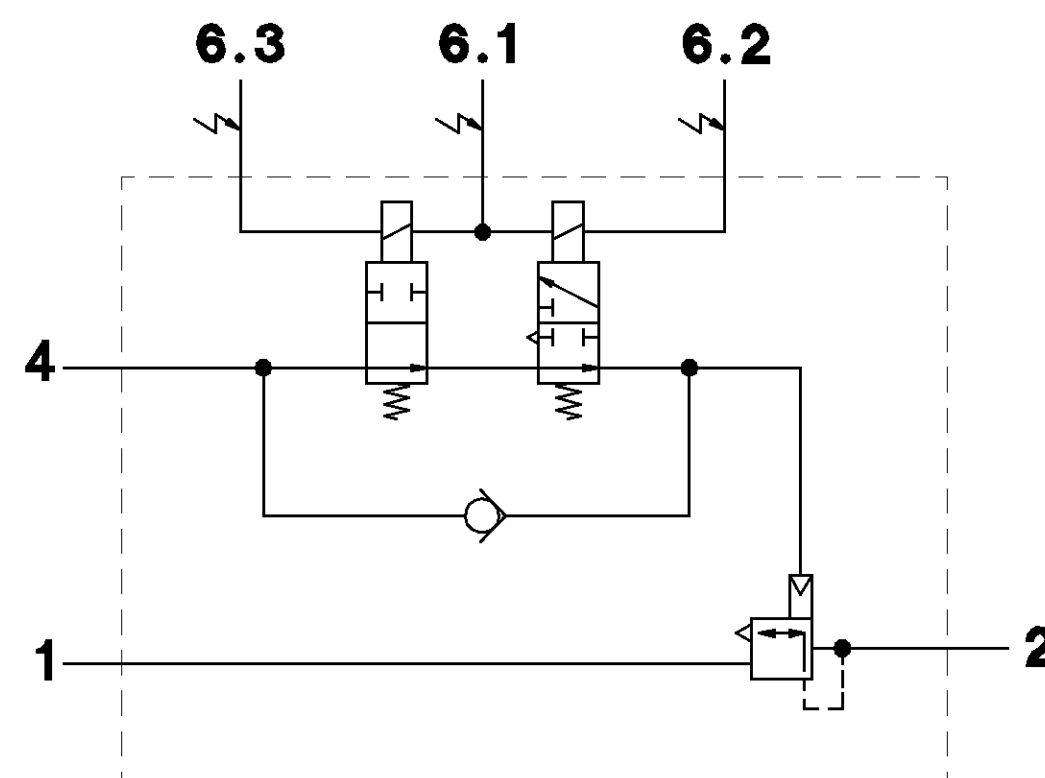

MEDIUM } AIR
MEDIUM } LUFT
FLUIDE } AIR
FLUIDO } ARIA

VOLTAGE	}	$24_{-2.4}^{+4.8}$ V
SPANNUNG		
VOLTAGE		
VOLTAGGIO		

TYPE OF CURRENT	}	DIRECT CURRENT
STROMART		GLEICHSTROM
NATURE DU COURANT		COURANT CONTINU
NATURA DELLA CORRENTE		CORRENTE CONTINUA

SERVICE CONDITION	}	DISCONTINUOUS SERVICE	ED 5%/5min
BETRIEBSART		AUSSETZBETRIEB	
CONDITION DU SERVICE		SERVICE DISCONTINUE	
CONDIZIONE DI SERVIZIO		ESERCIZIO DISCONTINUO	

NOMINAL CURRENT
NENNSTROM
COURANT NOMINAL
CORRENTE NOMINALE

} 1.65 A

TYPE OF PROTECTION	}	IP 68
SCHUTZART		
MODE DE PROTECTION		EN 60529/IEC 529
TIPO DI PROTEZIONE		

PROTECTION CLASS
SCHUTZKLASSE
CLASSE DE PROTECTION
CLASSE DI PROTEZIONE

WORKING PRESSURE
BETRIEBSDRUCK
PRESSION D'UTILISATION
PRESSION DI ESERCIZIO

} MAX. 10 bar

THERMAL RANGE OF APPLICATION
 THERMISCHER ANWENDUNGSBEREICH
 GAMME D'APPLICATION THERMIQUE
 CAMPO DI APPLICAZIONE TERMICA

} -40° C. ... +80° C

SOCKET	}	894 601 018 2
GERAETESTECKDOSE		
PRISE DE COURANT		
PRESA DI CORRENTE		

ADMISSIBLE INSTALLATION POSITION
ZULAESSIGE EINBAULAGE
POSITION D'INSTALLATION ADMISE
POSIZIONEEDI MONTAGGIO AMMESSA

} ±15°

FOR FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION
POUR AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION
PER ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO

472 195 020 0
(CODE 635)

605/653
H
1009/016/3/04.93