

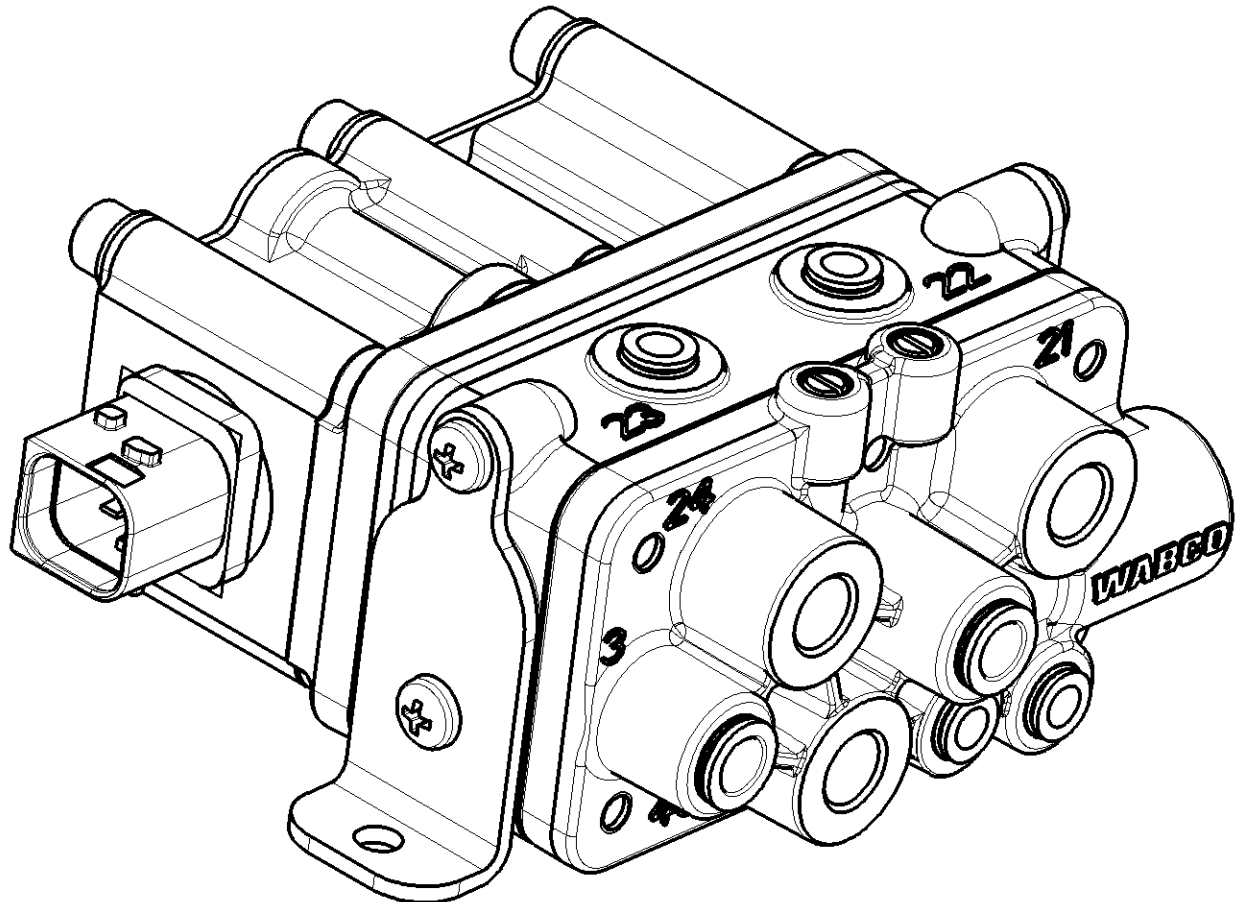
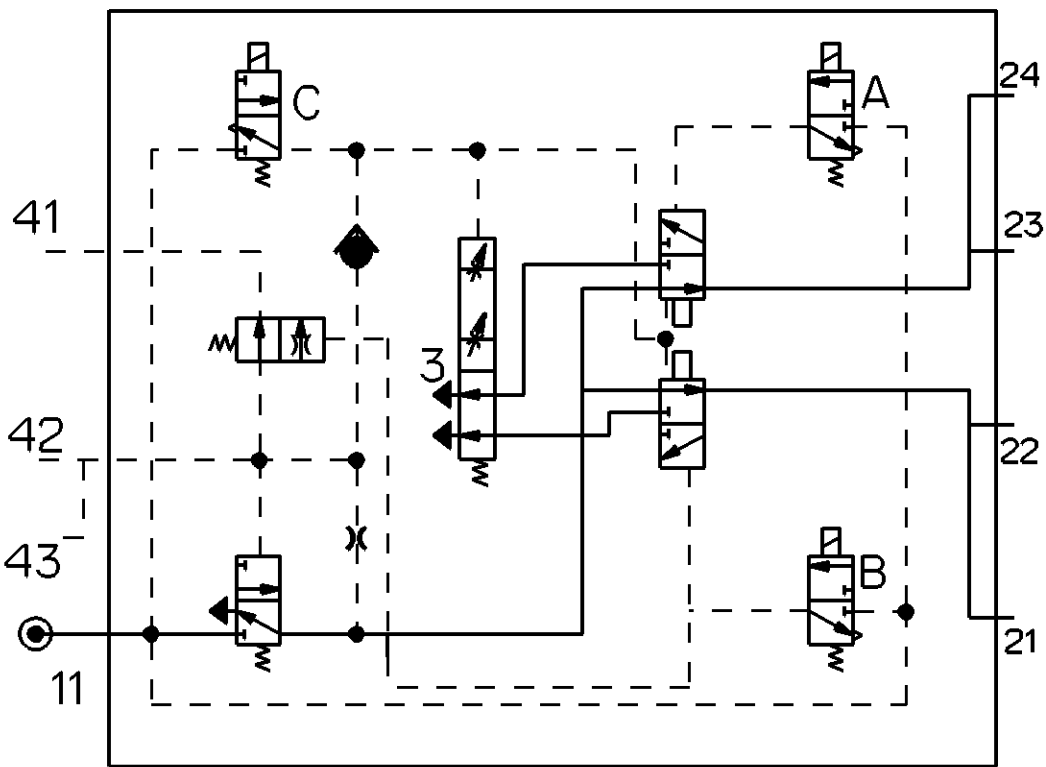
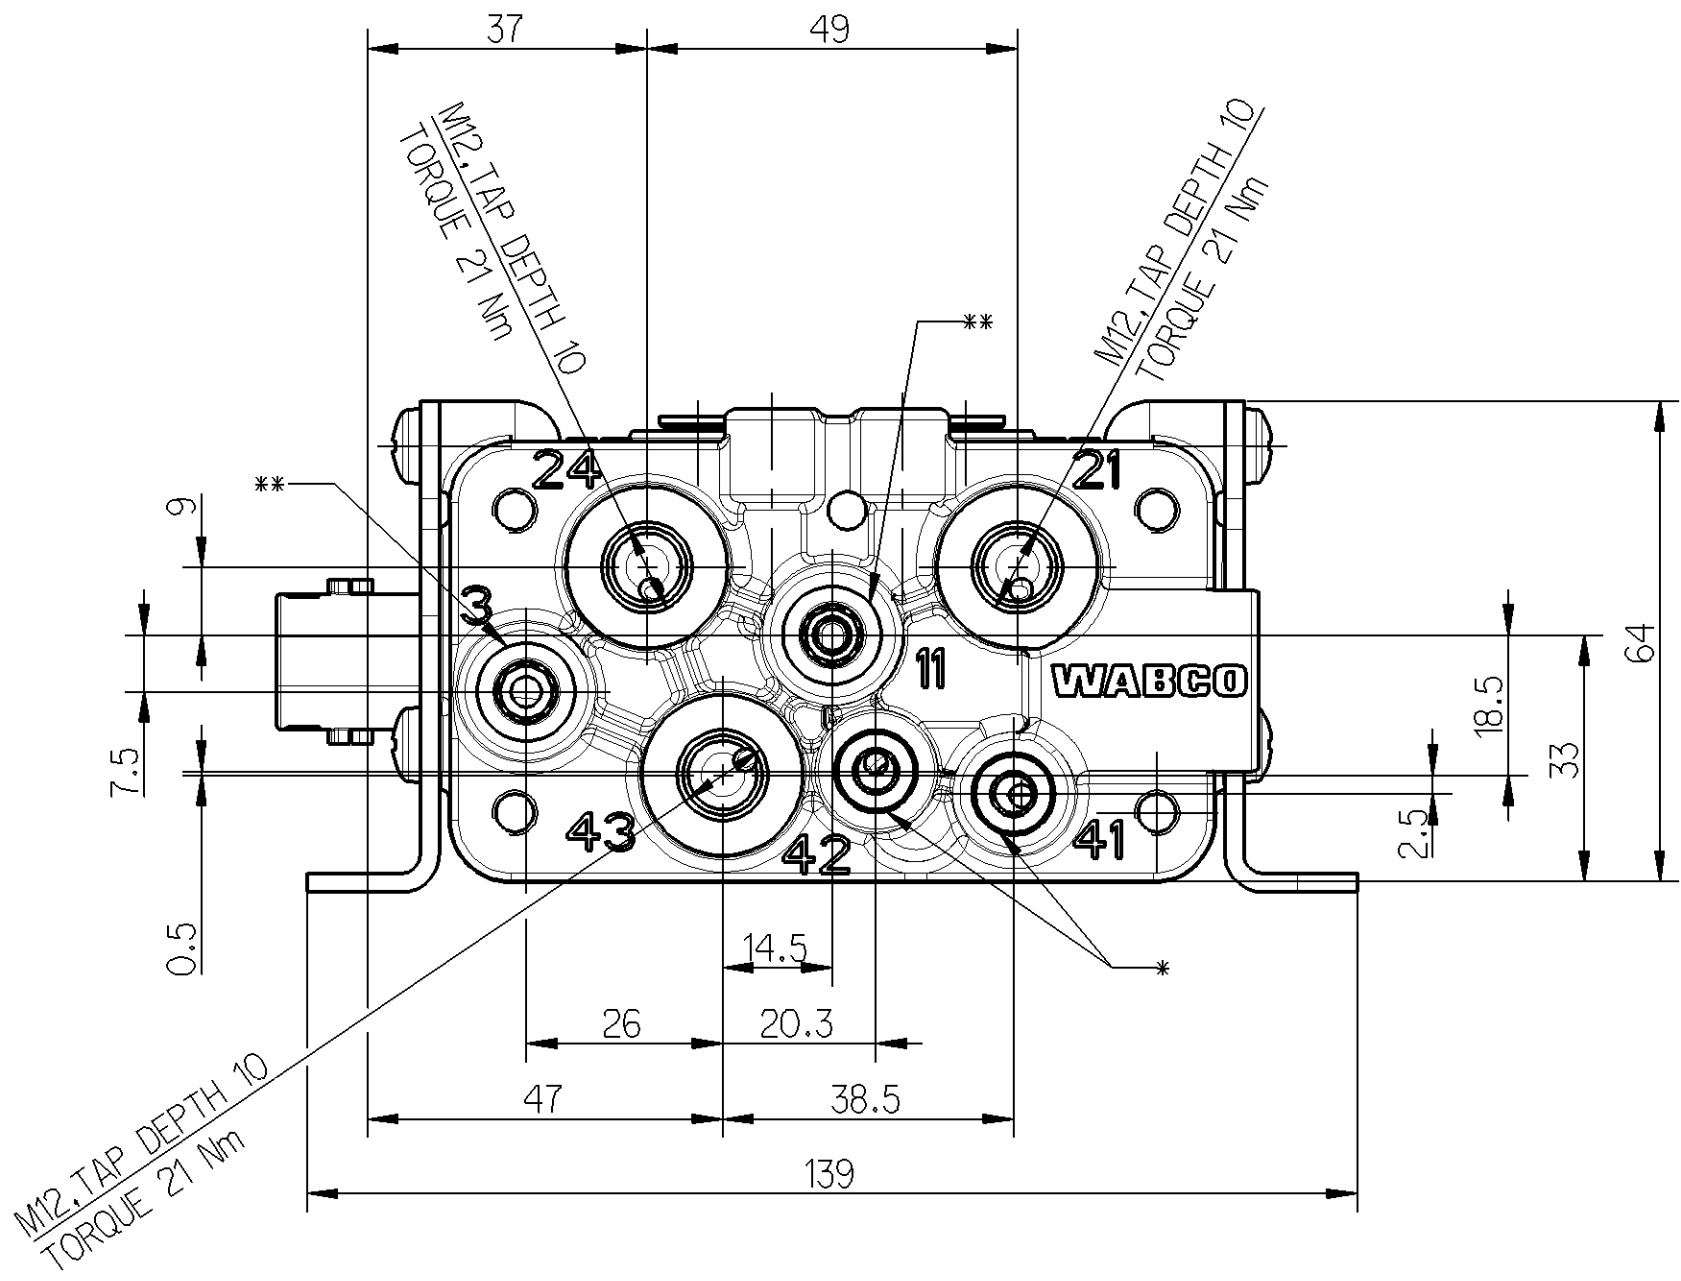
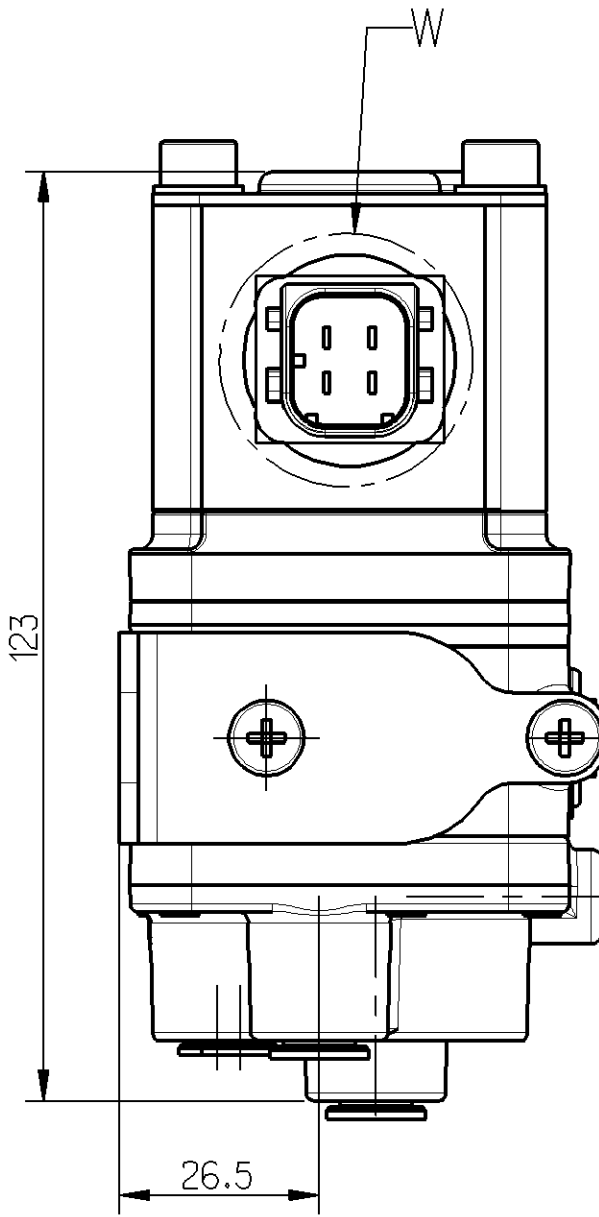






PART CODE	SURFACE PROTECTION
I	JED-256-5
II	SCMATL 39M1 ☺
III	JED-240-2
IV	NO SURFACE PROTECTION
V	JED-378-4

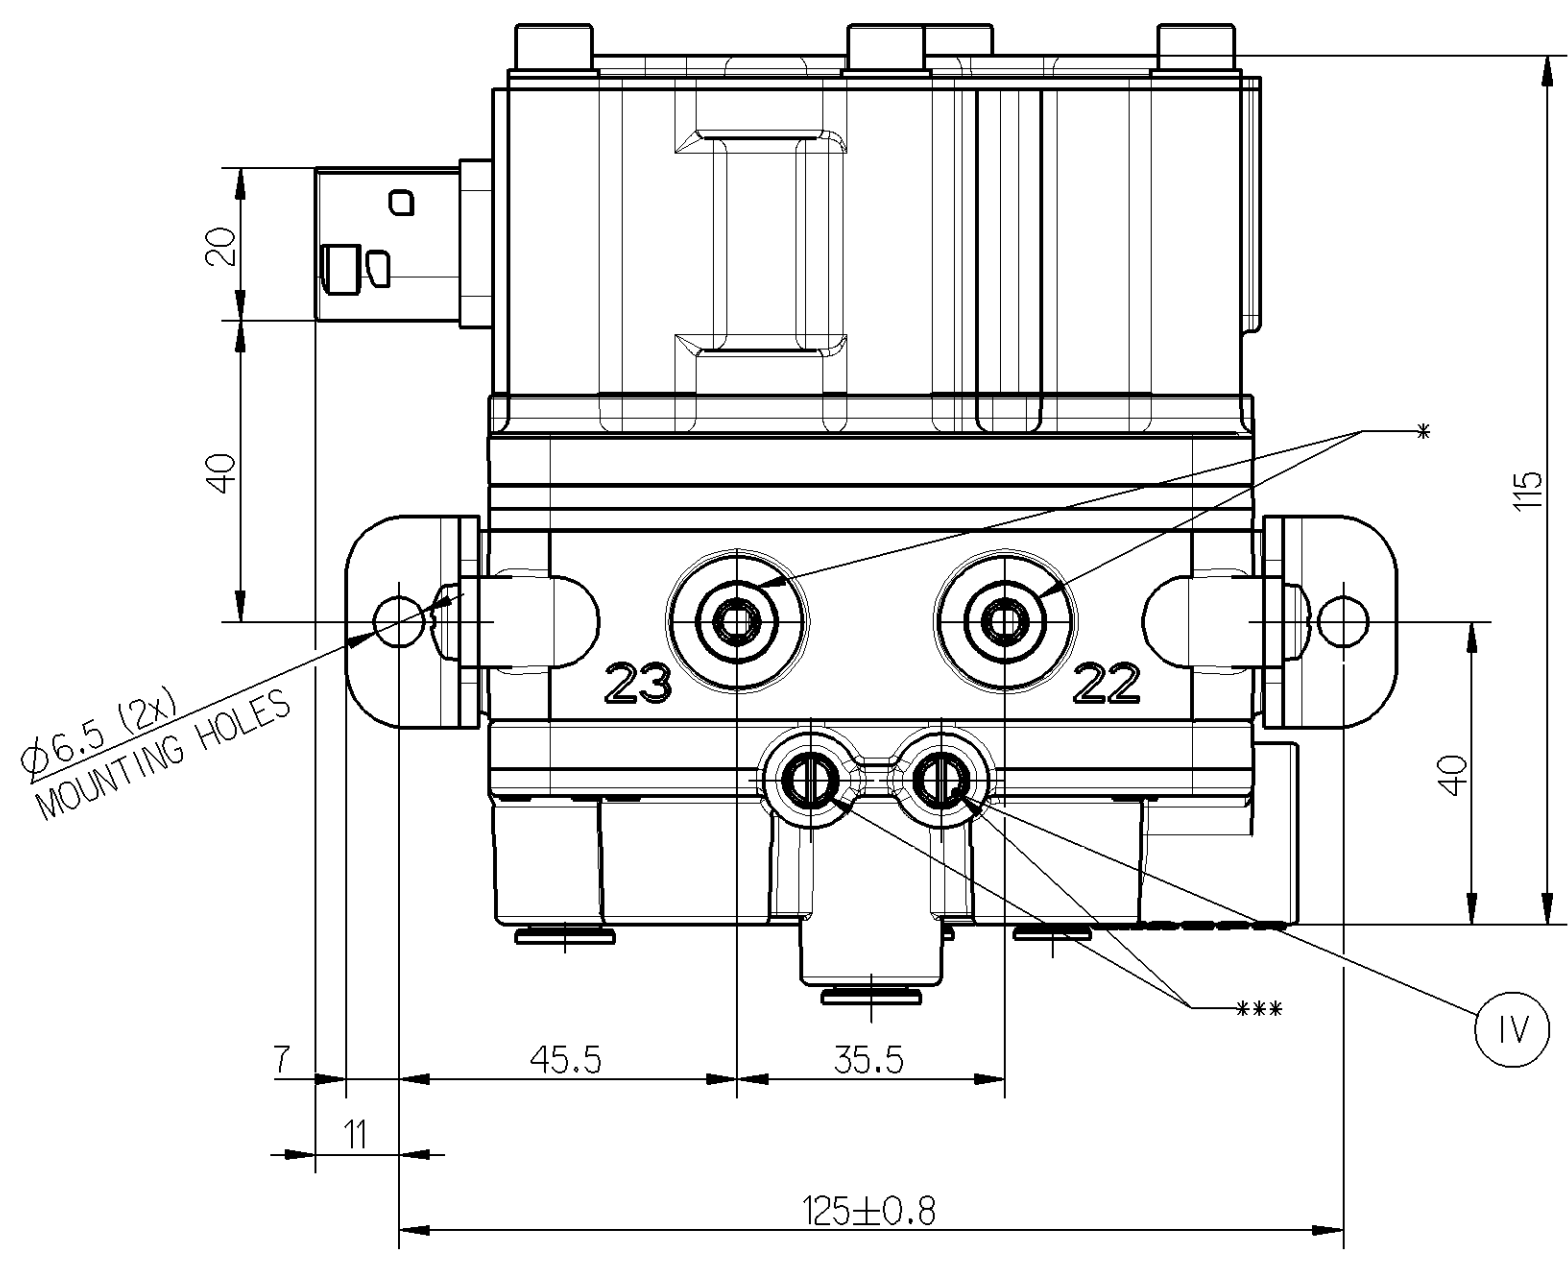

MEDIUM	:	AIR
MEDIUM	:	LUFT
FLUIDE	:	AIR
FLUIDO	:	ARIA
NOMINAL DIAMETER	:	
NENNWEITE	:	Ø4 mm
DIAMETRE NOMINAL	:	
DIAMETRO NOMINALE	:	
VOLTAGE	:	
SPANNUNG	:	24 ⁺⁸ ₋₆ V
TENSION	:	
TENSIONE	:	
TYPE OF CURRENT	:	DIRECT CURRENT
STROMART	:	GLEICHSTROM
NATURE DU COURANT	:	COURANT CONTINU
NATURA DELLA CORRENTE	:	CORRENTE CONTINUA
RATED CURRENT	:	
NENNSTROM	:	0.32 A
COURANT NOMINAL	:	
CORRENTE NOMINALE	:	
DEGREE OF PROTECTON	:	
SCHUTZART	:	IP 6K (WITH ALL PORTS SEALED)
DEGRE DE PROTECTON	:	
GRADO DI PROTEZIONE	:	
FOR PIPE	:	
FÜRE ROHR	:	
* POUR TUBE	:	PUSH TO FIT CONNECTORS FOR PIPES Ø6 x 1
PER TUBO	:	
FOR PIPE	:	
FÜRE ROHR	:	
** POUR TUBE	:	PUSH TO FIT CONNECTORS FOR PIPES Ø8 x 1
PER TUBO	:	
*** THROTTLE POSITION IN CONDITION AS DELIVERED	:	OPTIONAL
STELLUNG DER DROSSELSCHRAUBE IM LIEFERZUSTAND	:	
WORKING PRESSURE/CONTROL PRESSURE	:	
BETRIEBSDRUCK/STEUERDRUCK	:	
PRESSION D'UTILISATION/PRESSION DE COMMANDE	:	5 10 bar
PRESSIONE DI ESERCIZIO/PRESSIONE DI COMANDO	:	
THERMAL RANGE OF APPLICATION	:	
THERMISCHER ANWENDUNGSBEREICH	:	
GAMME D'APPLICATION THERMIQUE	:	-25° +80°C
CAMPO TERMICO D'APPLIAZIONE	:	
INSTALLATION POSITION	:	OPTIONAL
EINBAULAGE	:	BELIEBIG
POSITION D'INSTALLATION	:	A VOLONTE
POSIZION DI MONTAGGIO	:	A SCELTA

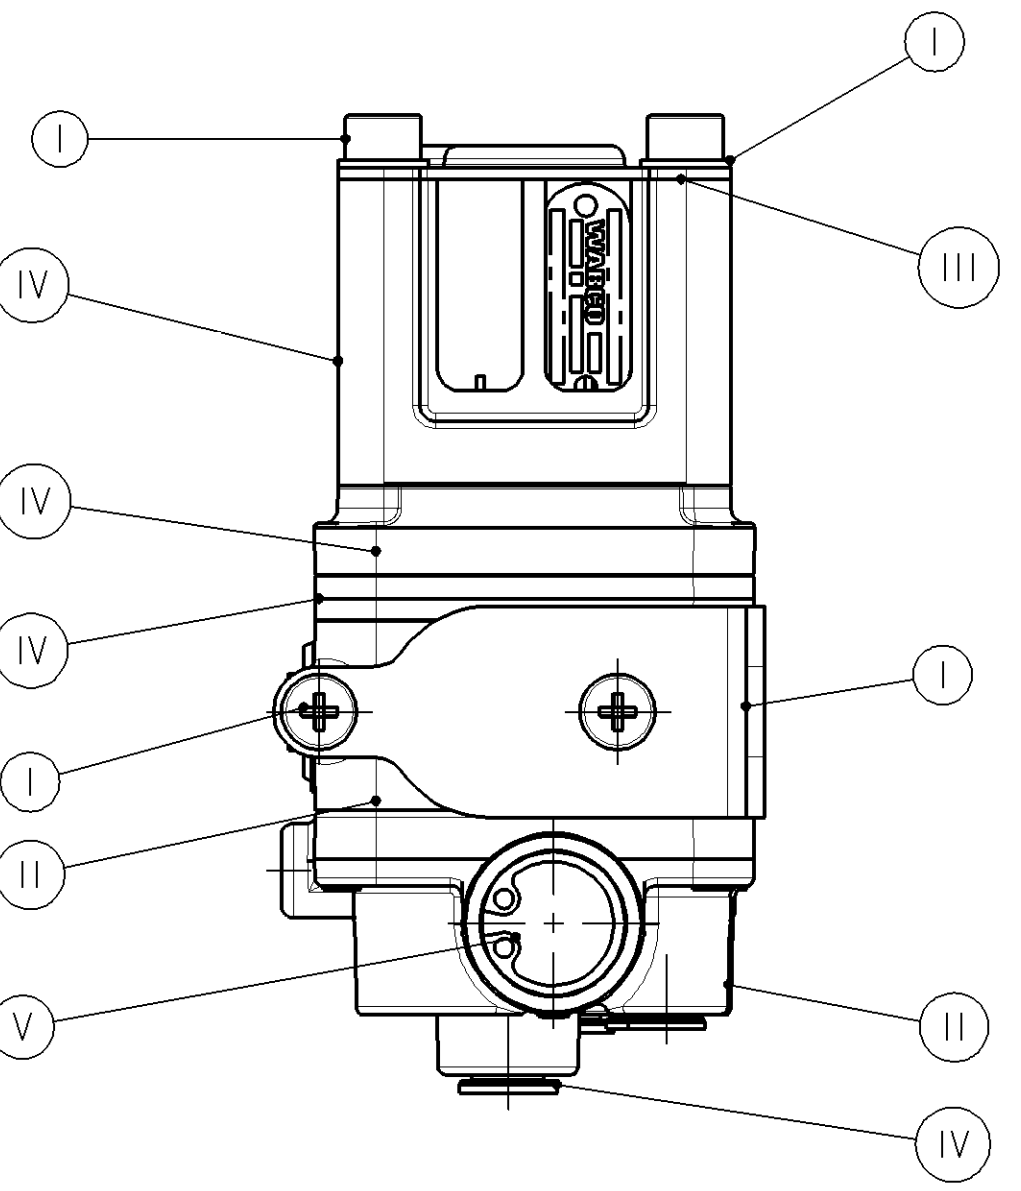

- SUPPLY PORT
ENERGIEZUFLUSS ODER ANSCHLUSS DRUCKSCHALTER
11 APPORT D'ENERGIE ORIFICE CONTACTEUR ELECTROPNEUMATIQUE
ALIMENTAZIONE DI ENERGIA ORIFIZIO INTERRUOTORE PNEUMATICO DI CORRENTE
- DELIVERY PORTS
ENERGIEABFLUSS
SORTIE D'ENERGIE
PORTATA DI ENERGIA
21, 22, 23, 24
- EXHAUST
ENTLUEFTUNG
3 ECHAPPEMENT
SCARICO
- CONTROL PORTS
STEUERANSCHLUSS
ORIFICE DE COMMANDE
ORIFIZIO DI COMANDO
41, 42, 43
- ELECTRICAL CONTROL
ELEKTRISCHER STEUERANSCHLUSS TYCO HDSCS 4 x 2.8 CODING A
COMMANDE ELCTRIQUE
COMANDO ELETTRICO
6.1, 6.2, 6.3, 6.4

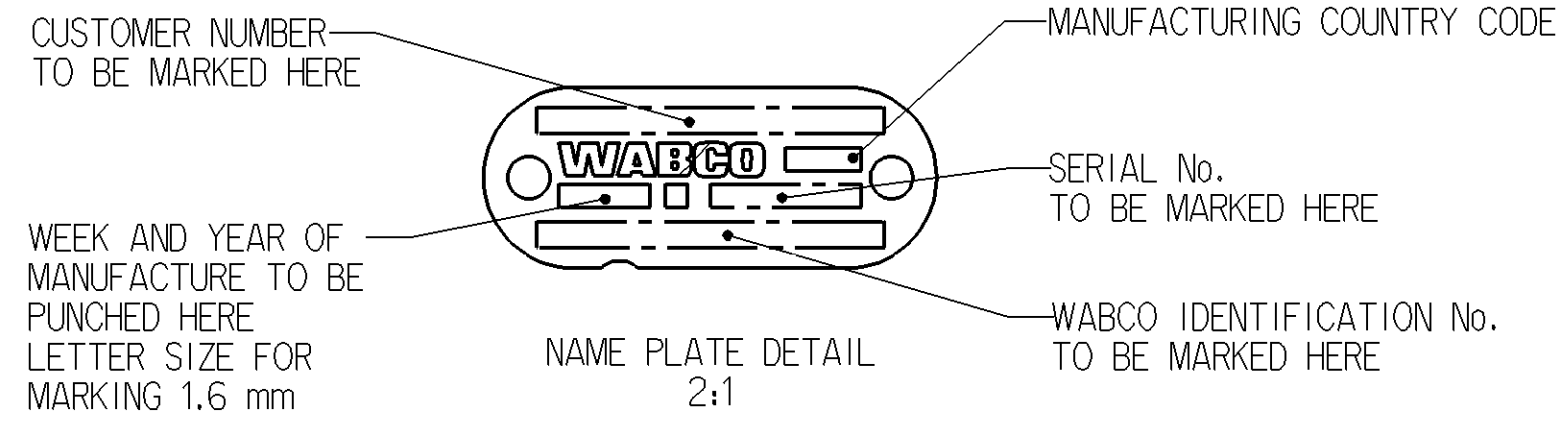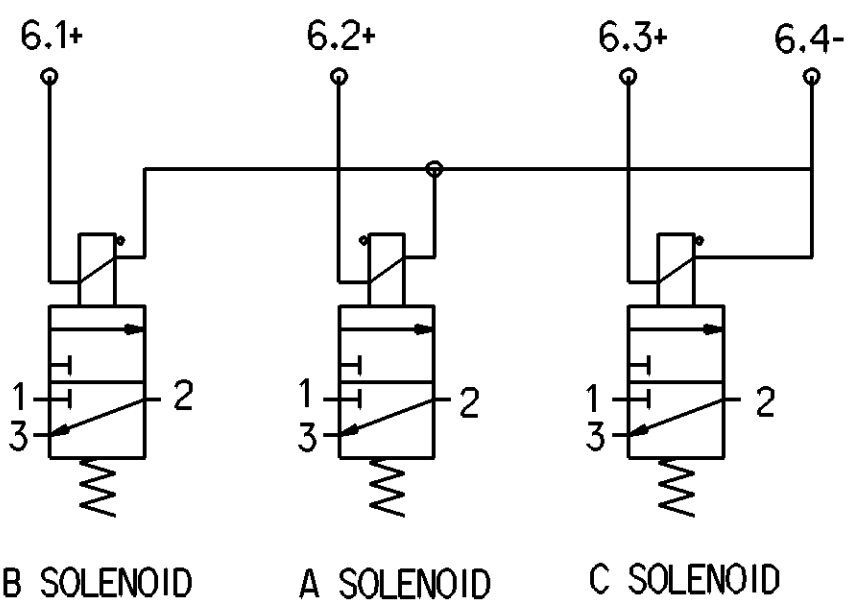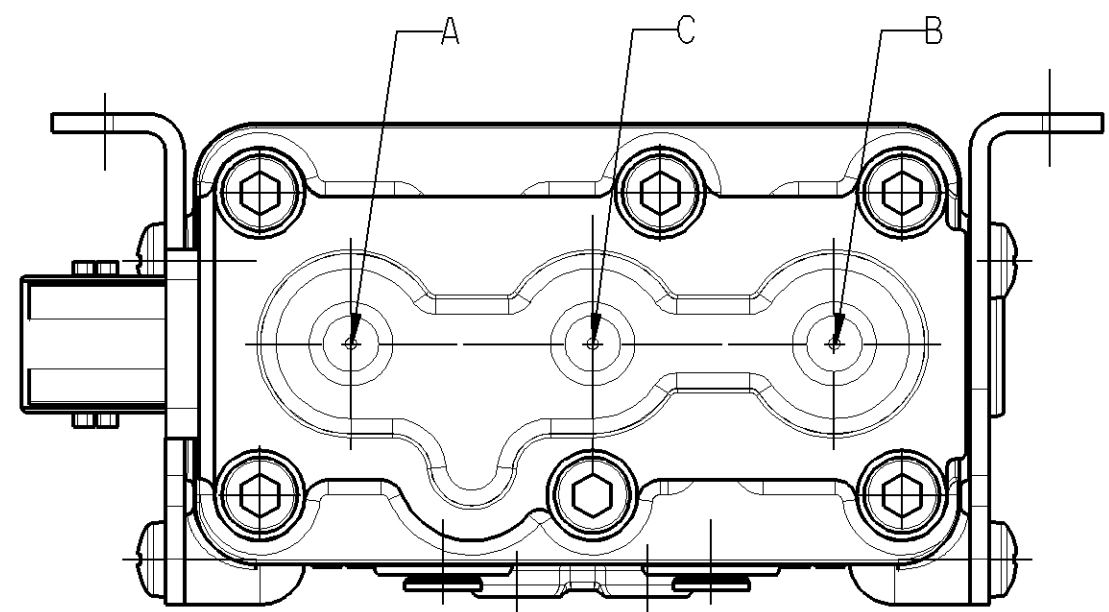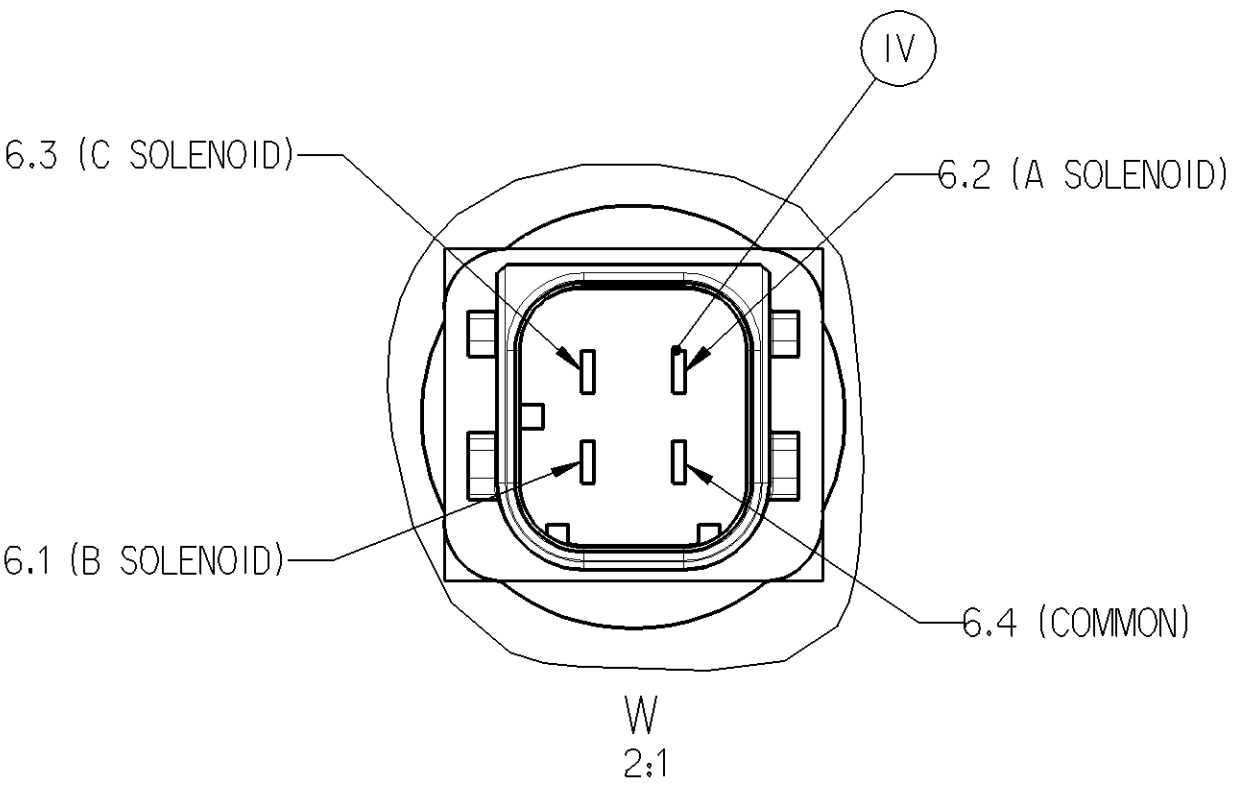

General Specifications JED-334-0		Copyright WABCO®		WABCO	
Further Technical Data: 472 601 001 0		Date		Signature	
Doc. Code: 435		Sheet: 1 To 7		MTS2 VALVE	
General Tolerances JED-261		2011-05-11 Prodeep		Checked	
Range of Nominal Dimensions (± mm)		2011-05-11 Chowattukunnel		Expert	
Class 1)		Jabin Chowattukunnel		Material No.	
Fine	≤ 50	> 50	> 180	> 400	> 400
Medium	≤ 50	> 50	> 180	> 400	> 400
Coarse	≤ 50	> 50	> 180	> 400	> 400
Tapped Holes acc. JED-152		Ech.No.		Revision	
1) Tolerance Class Applied Crossmarked		155408		2 C 6600	
Date of first issue: 2010-12-22		Doc.Code		Language	
005		EN		1/1	