
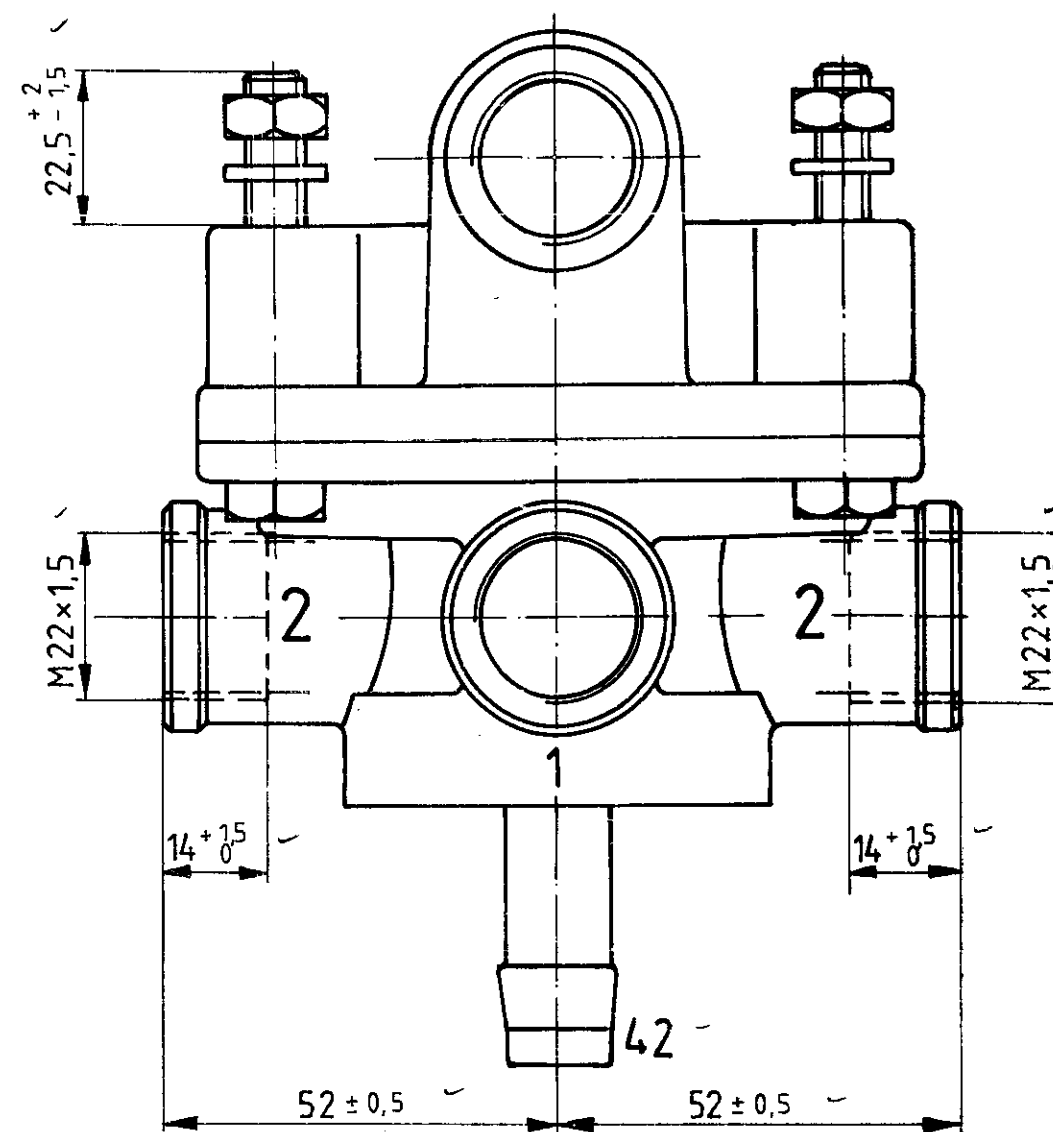


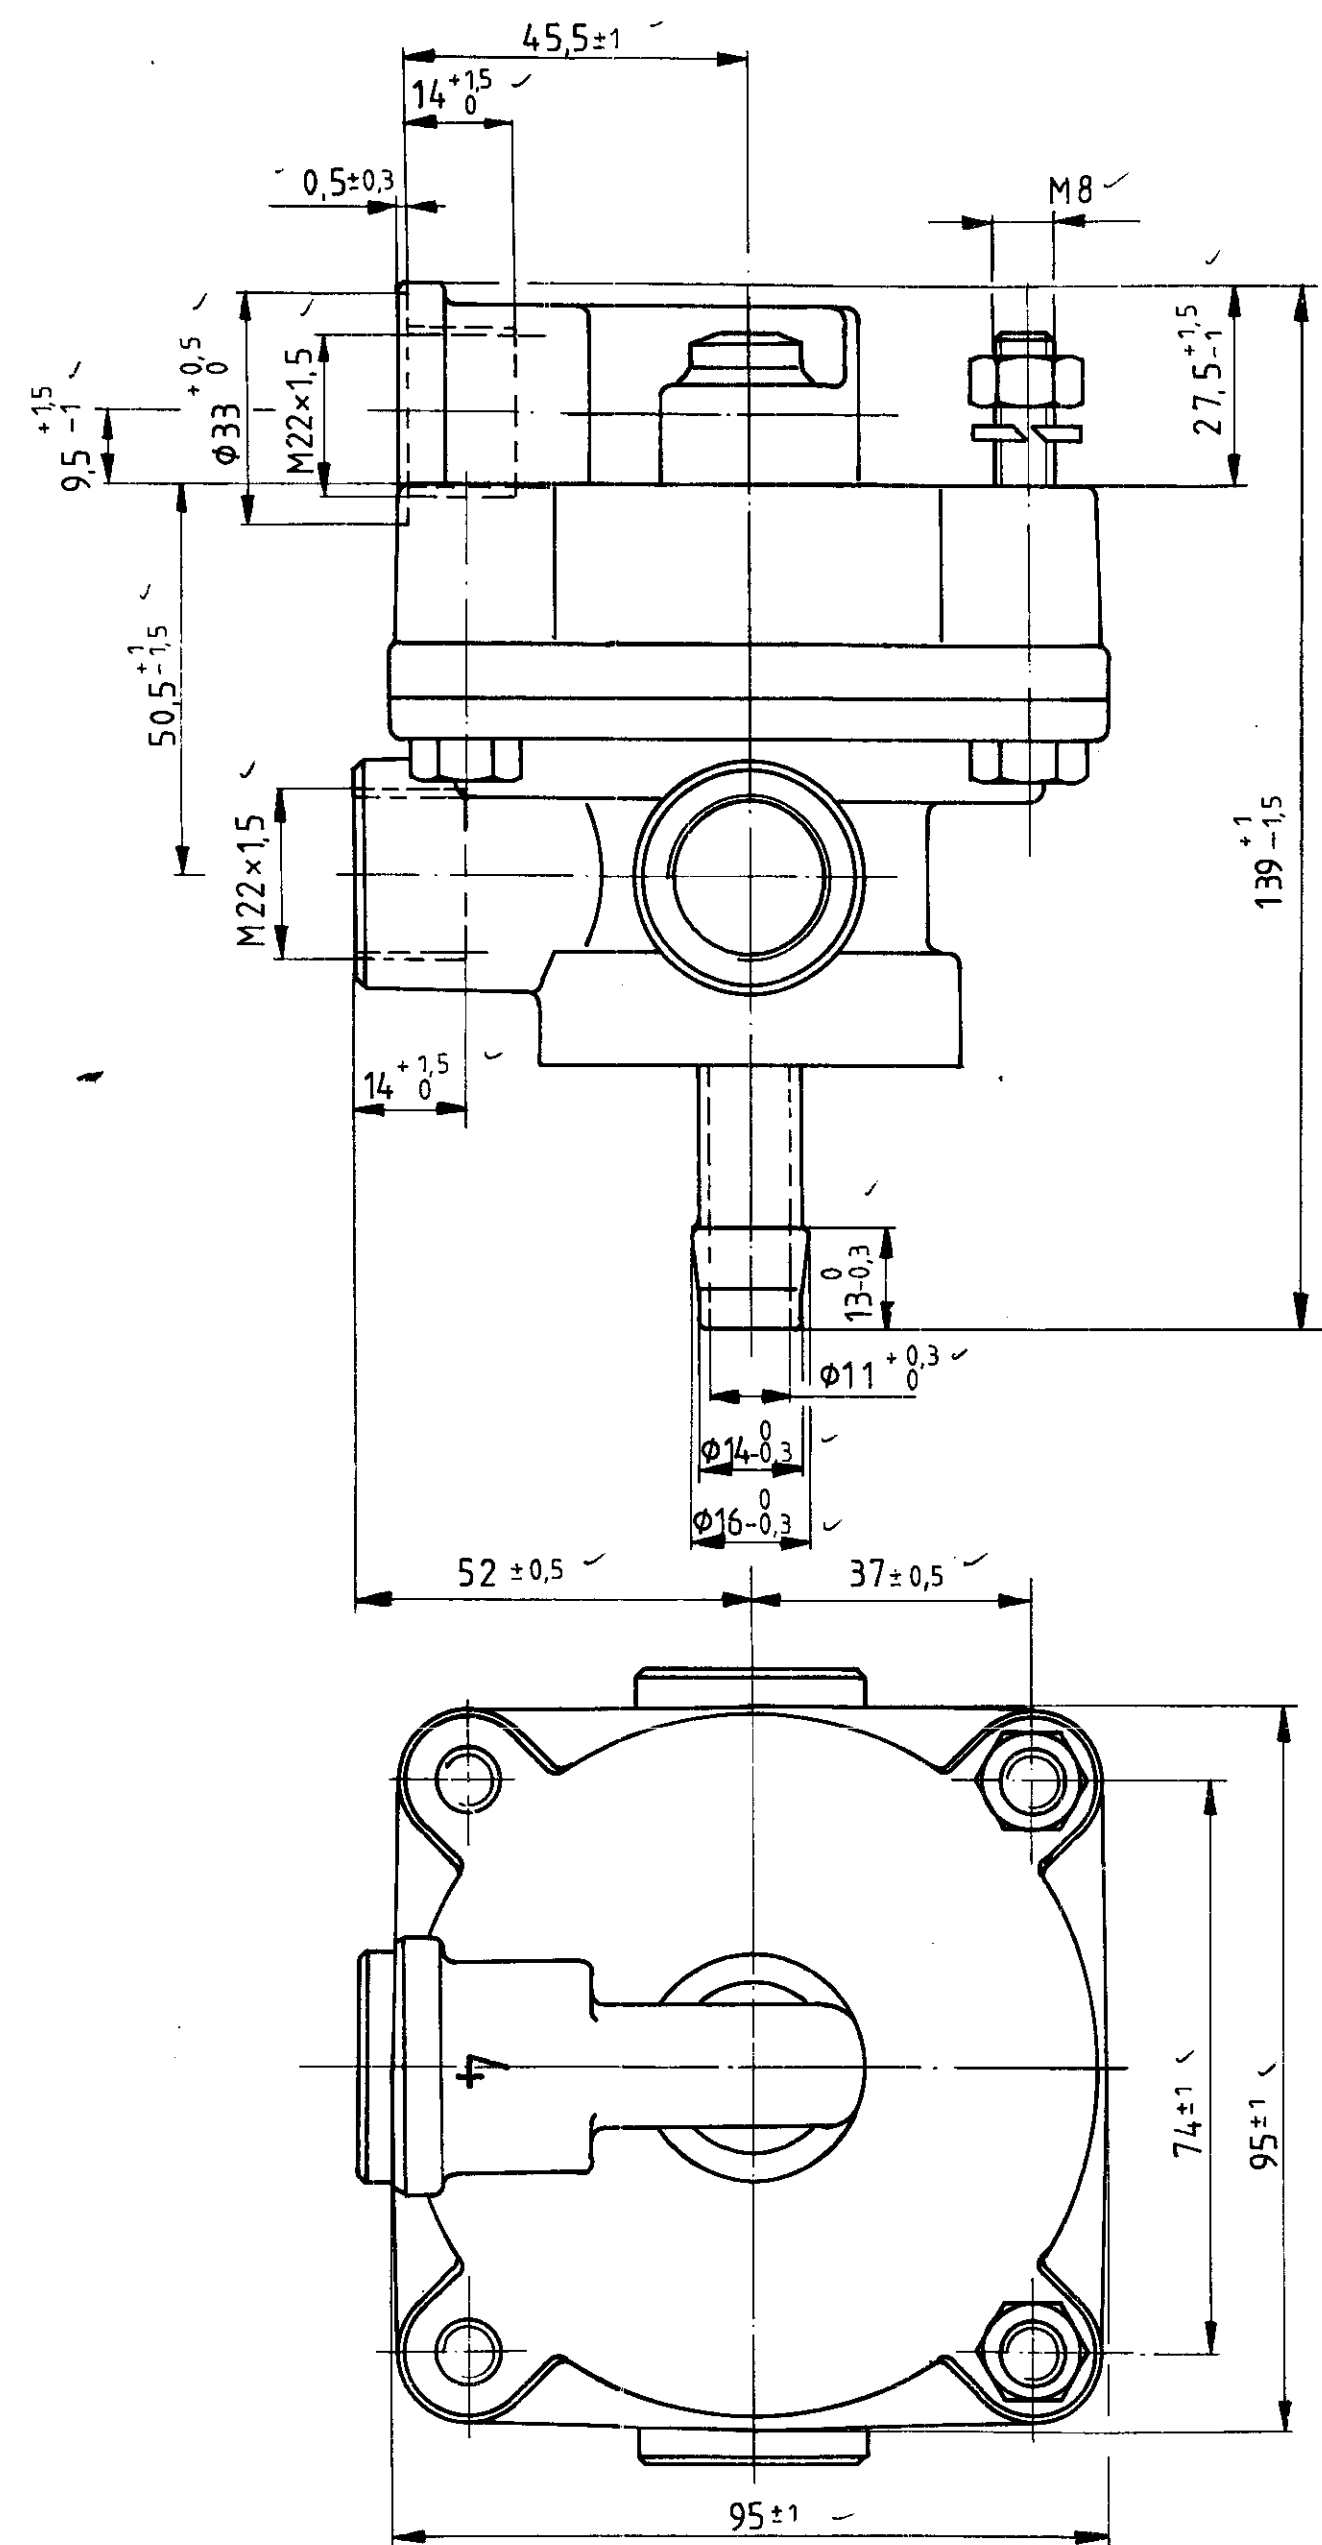

- 1 SUPPLY
VORRAT
ALIMENTATION (p1)
ALIMENTAZIONE
- 2 OUTLET PRESSURE
AUSGESTEUERTER DRUCK (p2)
PRESSION DE SORTIE
PRESSIONE DI USCITA
- 4; 42 CONTROL PRESSURE
STEUERDRUCK (p4; p42)
PRESSION DE COMMANDE
PRESSIONE DI COMANDO

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH - 40°C...+80°C
GAMME D'APPLICATION THERMIQUE
CAMPO DI APPLICAZIONE TERMICA



WORKING PRESSURE
BETRIEBSDRUCK
PRESSION D'UTILISATION MAX. pe=8bar
PRESSIONE DI ESERCIZIO

MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA

GENERAL TOLERANCES									
CLASS	RANGE OF NOMINAL DIMENSIONS (±mm)				FORCE, POWER, PRESSURE ETC.	±	°	μ	°
I	≤ 50	> 50	> 100	> 400	(±)	0	1	5	
II	0.5	1	1.5	2				10	
III	1	2	3	4				20	
	2	3.5	5	6.5					

TAPPED HOLES ACC. ISO 4039

TOLERANCE CLASS APPLIED CROSSMARKED

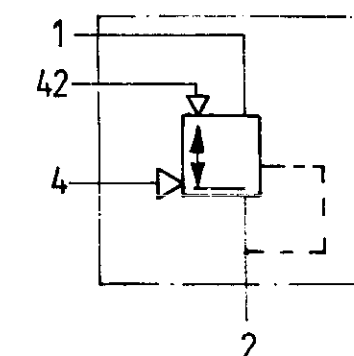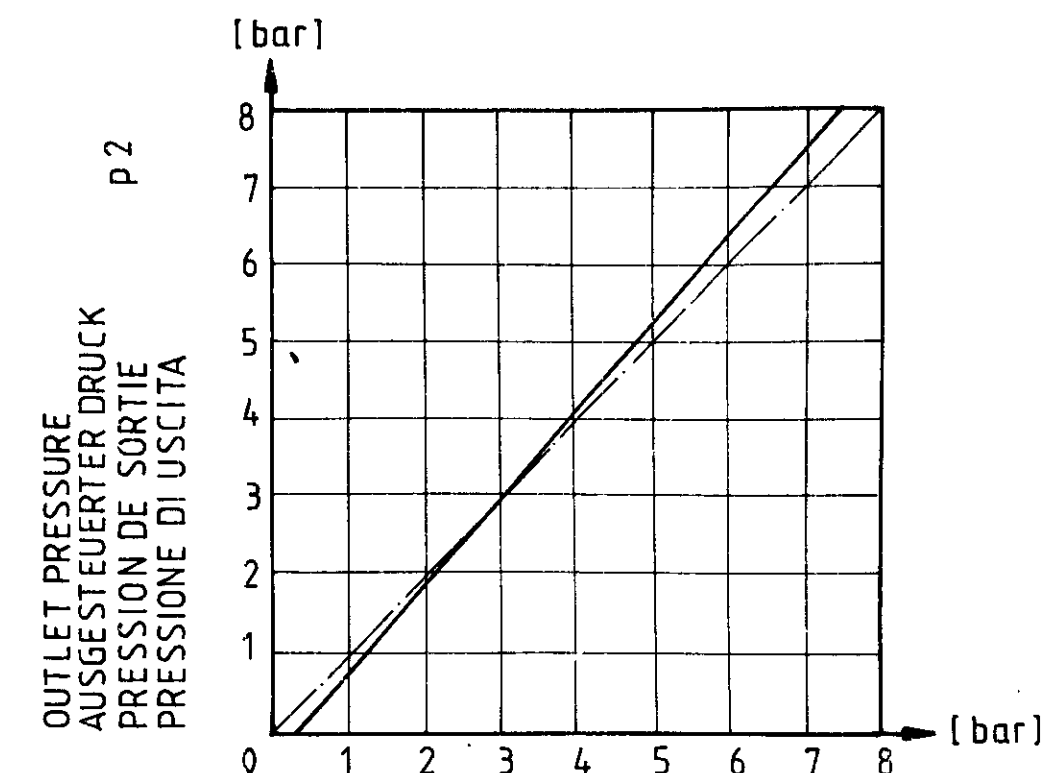

COPYRIGHT BY WABCO		WABCO	
DATE	SIGNATURE	OVER LOAD PROTECTION VALVE	
80-02-11	<i>Winking</i>		
80-07-04	<i>Kolbert</i>		
80-07-04	<i>from</i>		
MASS	SCALE	IDENTIFICATION	
1.1	1:1	473 013 000 0	
SIZE	YRL	CODE FOR FUNCTION	CODE FOR SHAPE
A 2	140		
REPLACEMENT FOR		CODE FOR DOCUMENT	
473 013 000 0 OF 15		605	
67-07-20 (A)			