
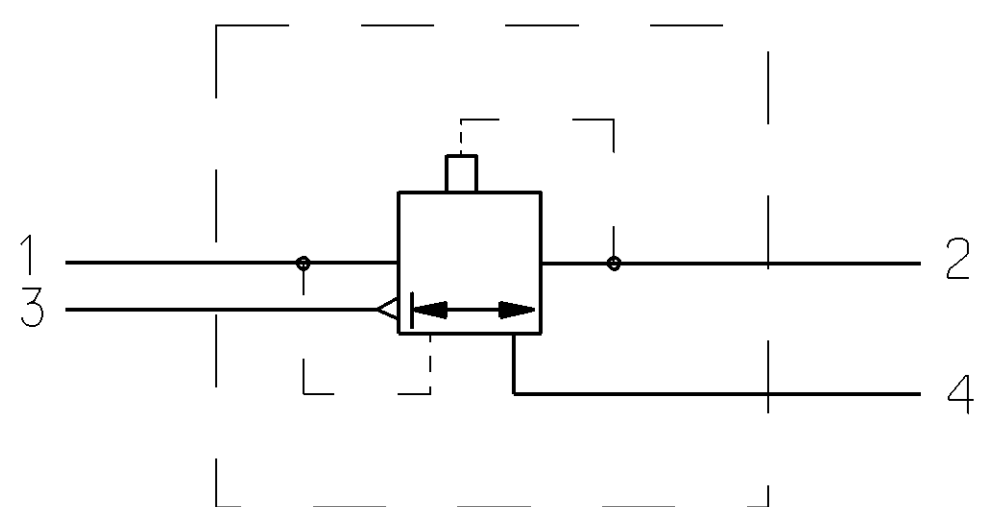


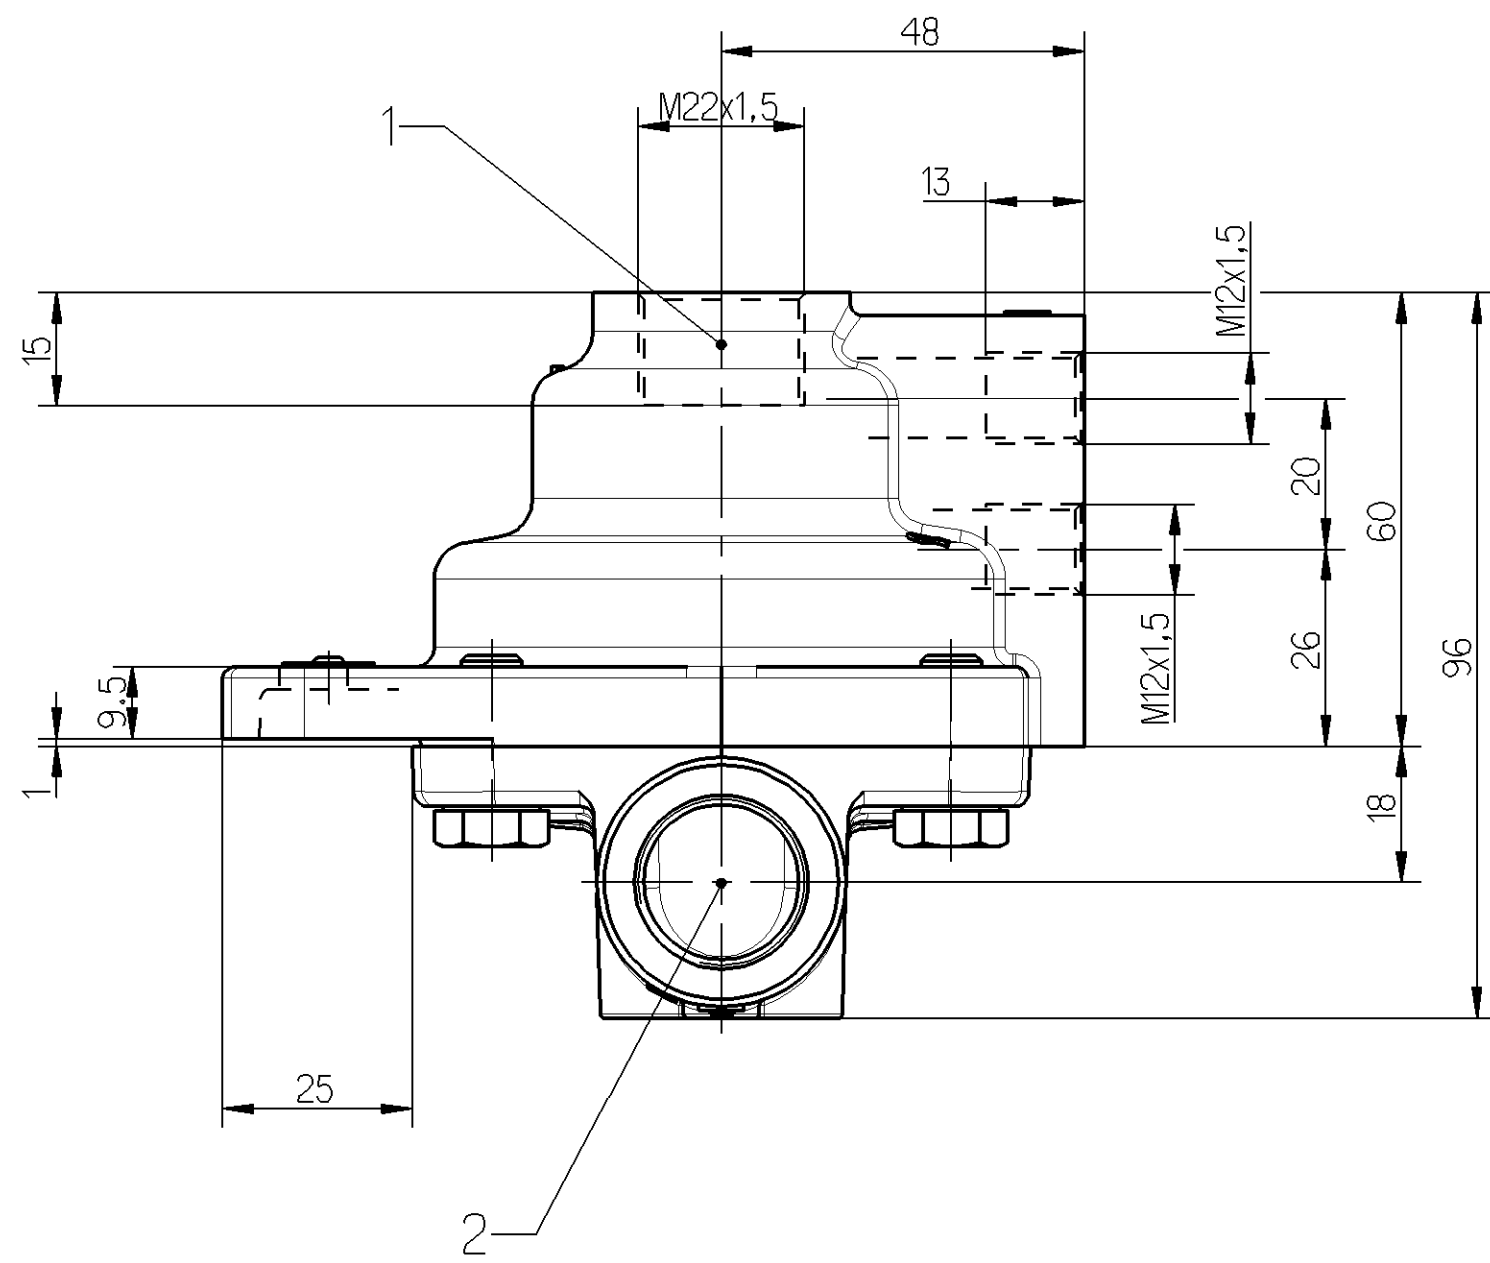

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
GAMME D' APPLICATION THERMIQUE
CAMPO DI APPLICAZIONE TERMICA

- 40°C....+ 80°C


WORKING PRESSURE
BETRIEBSDRUCK
PRESSION D'UTILISATION
PRESSIONE DI ESERCIZIO

Pe max = 10 bar

MEDIUM	-----	AIR
MEDIUM	-----	LUFT
FLUIDE	-----	AIR
FLUIDO	-----	ARIA

INSTALLATION POSITION AS DRAWN
EINBAULAGE WIE GEZEICHNET
POSITION D'INSTALLATION SUIVANT DESSIN
POSIZIONE DI MONTAGGIO COME DISEGNATO

- | | |
|---|---|
| 1 | INLET
EINGANG
ALIMENTATION
ALIMENTAZIONE |
| 2 | OUTLET
AUSGANG
SORTIE
USCITA |
| 3 | EXHAUST
ENTLUEFTUNG
ECHAPPAMENT
SCARICO |
| 4 | CONTROL PORT
STEUERANSCHLUSS
ORIFICE DE COMMANDE
ORIFIZIO DI COMANDO |

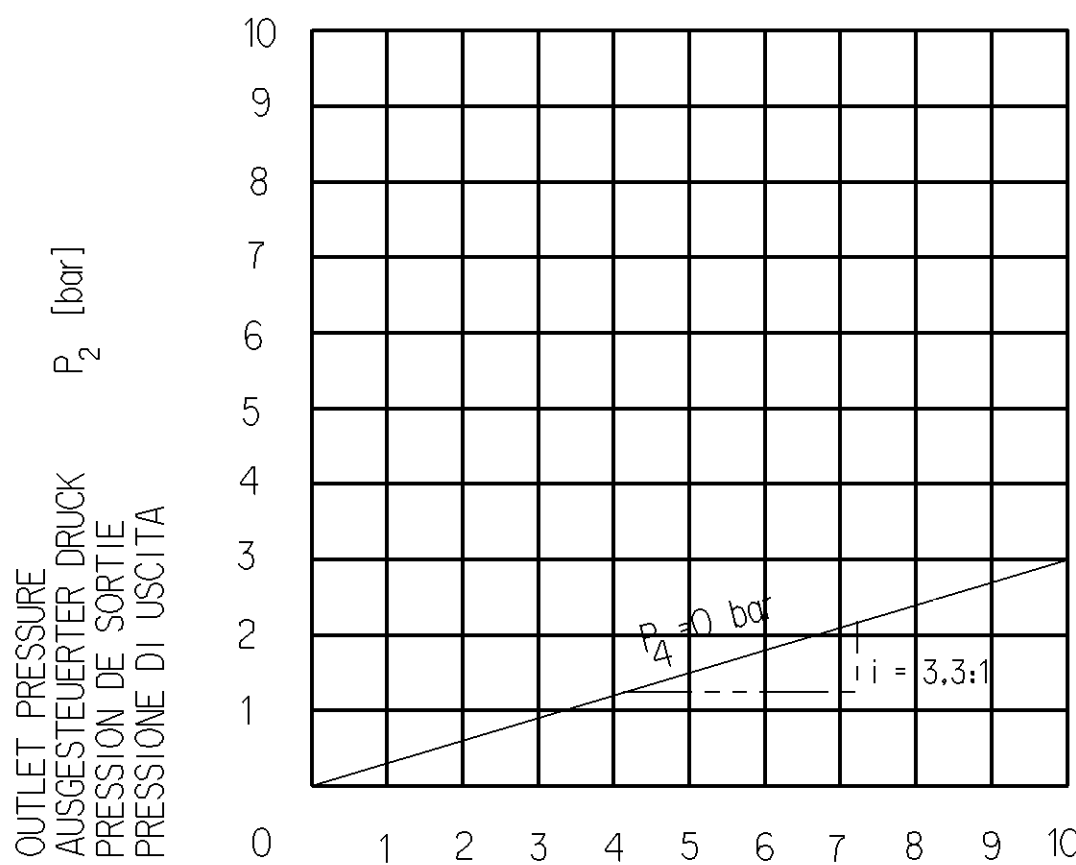

INLET PRESSURE
EINGESTEUERTER DRUCK
PRESSION D ALIMENTATION P_1 [bar]
PRESSIONE D ALIMENTAZIONE

TORQUE FOR CONNECTIONS:
ANZUGSMOMENT FUER EINSCHRAUBSTUTZEN: M12x1.5: M_{max} = 21 Nm
COUPLE DE SERRAGE DES RACCORDS: M22x1.5: M_{max} = 53 Nm
COPPIA DI SERRAGGIO DEI RACCORDI:

General Specification JED-334-Q Further Technical Data: Doc. Code: Sheet: To:				Copyright WABCO * Date: Signature:		WABCO LOAD PROPORTIONING VALVE LAST-LEERVENTIL VALVE VIDE-CHARGE VALVOLA MOTO-CARICO	
				2005-09-23 Rajasekaran Checked 2007-07-27 Pfeiffer			
General Tolerances JED-261 Range of Nominal Dimensions (± mm)				Expert Pfeiffer			
Class 1) ≤ 50 > 50 ≤ 180 > 180 ≤ 400 > 400 				Material No. 473 300 001 0			
Fine 0,5 1,0 1,5 2,0				Mass Scale 0.7H 1:1		WABCO Id. No.: 473 300 001 0 Doc. Code Language Sheet	
Medium 1,0 2,0 3,0 4,0				Size TRI		005 en/de fr/it 1/1	
Coarse 2,0 3,5 5,0 6,5 ±3°				A 1 530 		Function Code CAD System Prod.Type Replacement for Pro/E OO X 473 300 001 0 of 76-10-17	
DOW-N Rev. Date State of Revision				Tapped Holes acc. 1) Tolerance Class Applied Crossmarked			