
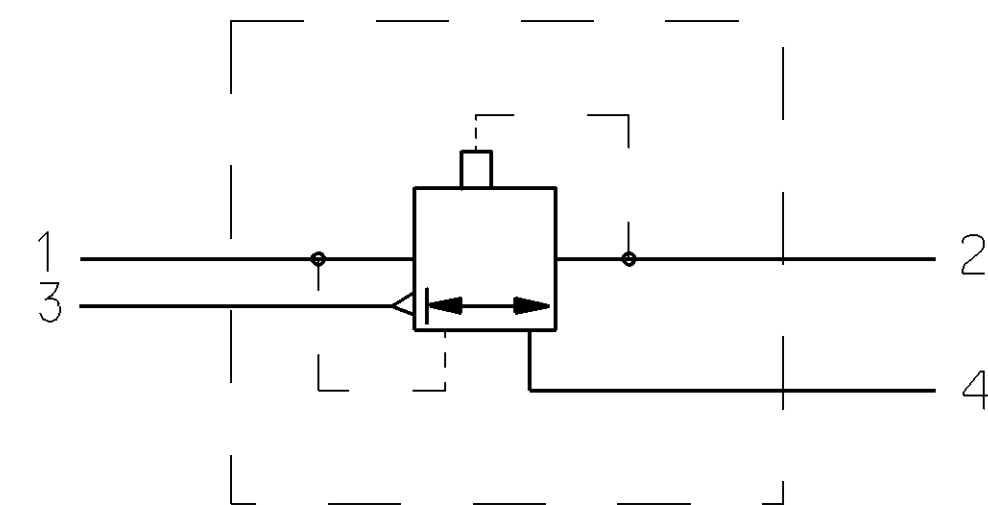
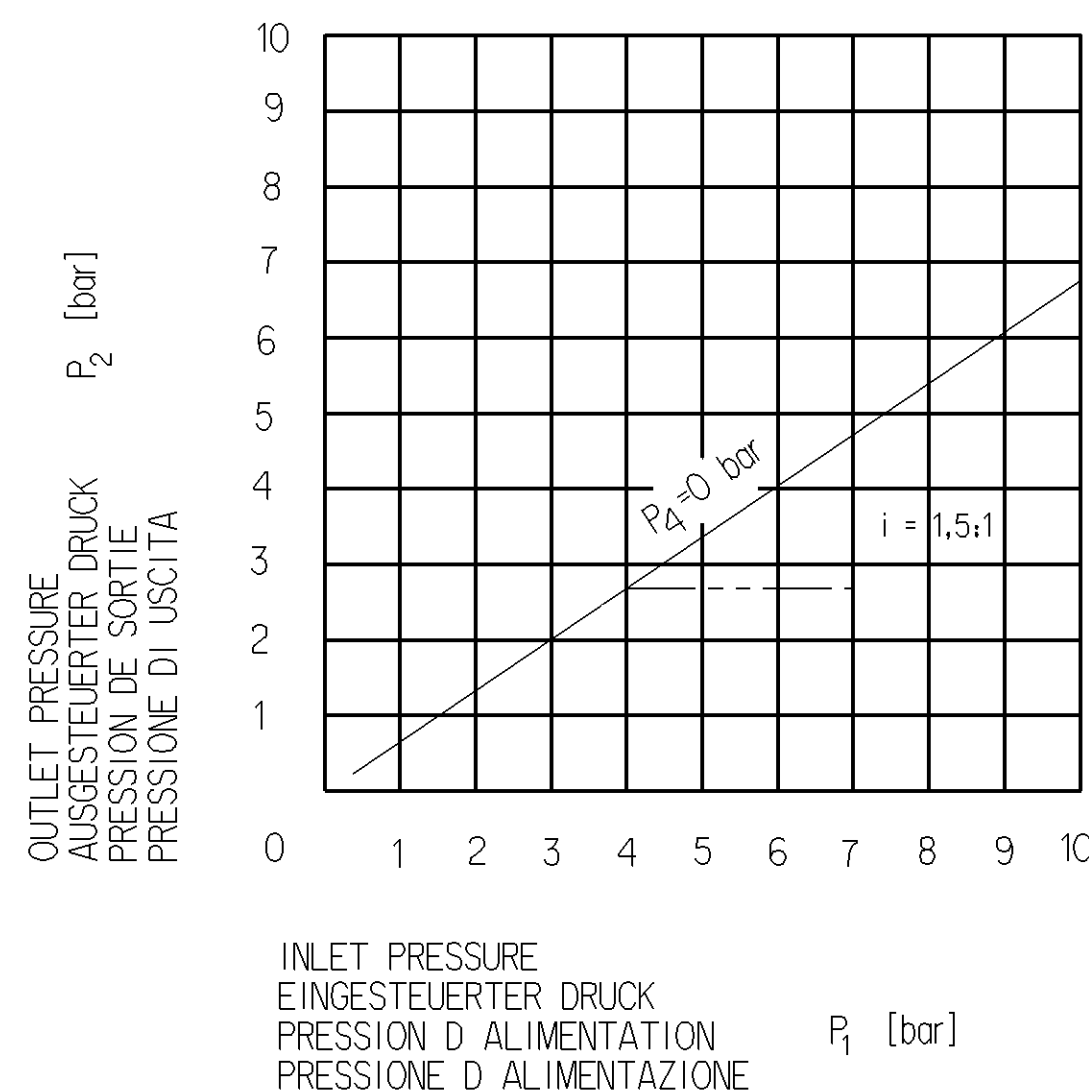


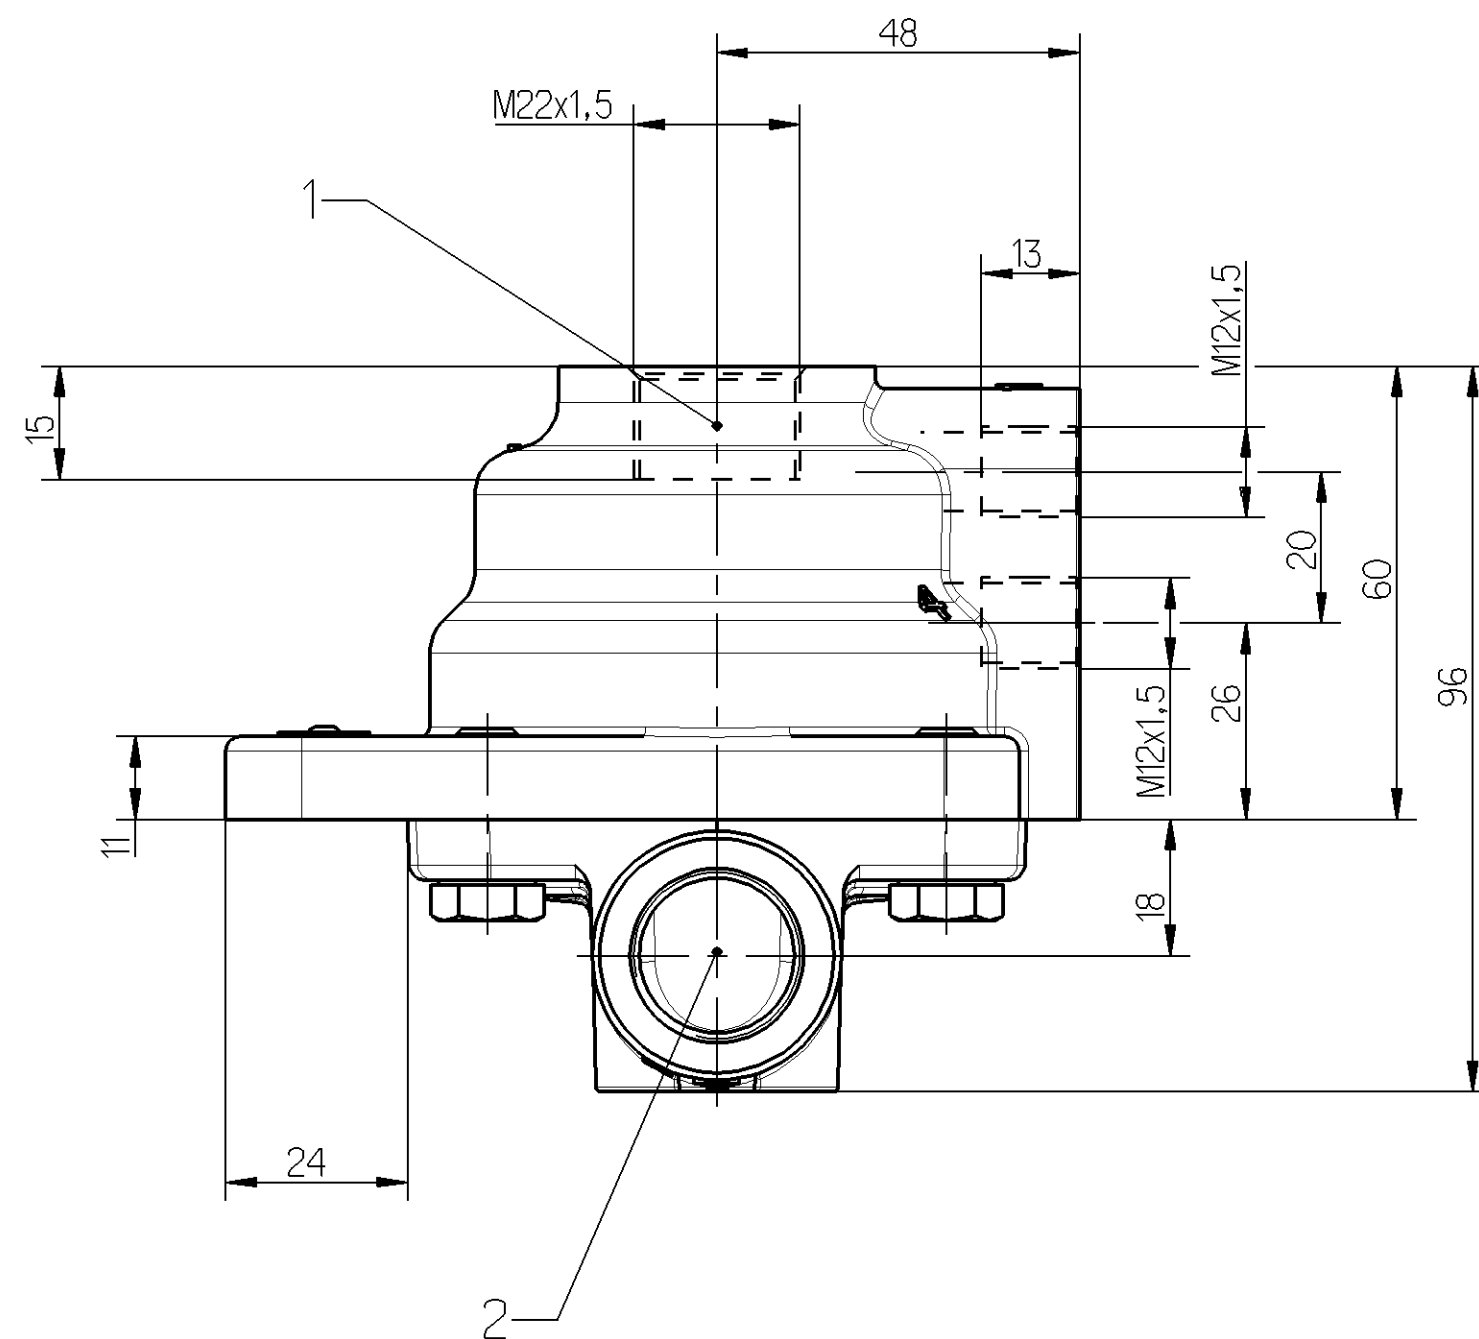

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
GAMME D' APPLICATION THERMIQUE
CAMPO DI APPLICAZIONE TERMICA

- 40°C....+ 80°C

WORKING PRESSURE
BETRIEBSDRUCK
PRESSION D'UTILISATION
PRESSIONE DI ESERCIZIO

Pe max = 10 bar

MEDIUM ----- AIR
MEDIUM ----- LUFT
FLUIDE ----- AIR
FLUIDO ----- ARIA

INSTALLATION POSITION AS DRAWN
EINBAULAGE WIE GEZEICHNET
POSITION D' INSTALLATION SUIVANT DESSIN
POSIZIONE DI MONTAGGIO COME DISEGNATO

- | | |
|---|--|
| 1 | INLET
EINGANG
ALIMENTATION
ALIMENTAZIONE |
| 2 | OUTLET
AUSGANG
SORTIE
USCITA |
| 3 | EXHAUST
ENTLUEFTUNG
ECHAPPAMENT
SCARICO |
| 4 | CONTROL PORT
STEUERANSCHLUSS
ORIFICE DI COMANDO
ORIFIZIO DI COMANDO |

TORQUE FOR CONNECTIONS:
ANZUGSMOMENT FUER EINSCHRAUBSTUTZEN: M12x1.5: M_{max} = 21 Nm
COUPLE DE SERRAGE DES RACCORDS: M22x1.5: M_{max} = 53 Nm
COPPIA DI SERRAGGION DEI RACCORDI:

General Specification: JED-334-O				Copyright WABCO®			
Further Technical Data:				Date	Signature		
Doc. Code:		Sheet: To		Drawn			
General Tolerances JED-261				Checked			
Range of Nominal Dimensions (± mm)				2005-09-23 Rajasekaran		LOAD PROPORTIONING VALVE LAST-LEERVENTING VALVE VIDE-CHARGE VALVOLA MOTO-CARICO	
Class 1) ≤ 50				2007-07-30 Pfeiffer			
> 50 ≤ 180 > 180 ≤ 400 > 400				Expert			
				Pfeiffer			
Fine				Mass		Material No.	
Medium				Scale		WABCO Id. No.: 473 300 004 0	
Coarse				0.738 kg		Doc. Code: Language: Sheet	
1) Tolerance Class Applied Crosshatched				1:1		473 300 004 0	
089660 E 2005-09-23 DCV/NV Rev. Date State of Revision				Size TRI		005 90/30 fr/1 1/1	
Tapped Holes acc. ISO 4039/JED-152				A 1 530		Function Code CAD System Prod.Type Replacement for Pro/E 00 X 473 300 004 0 of 78-10-17	