
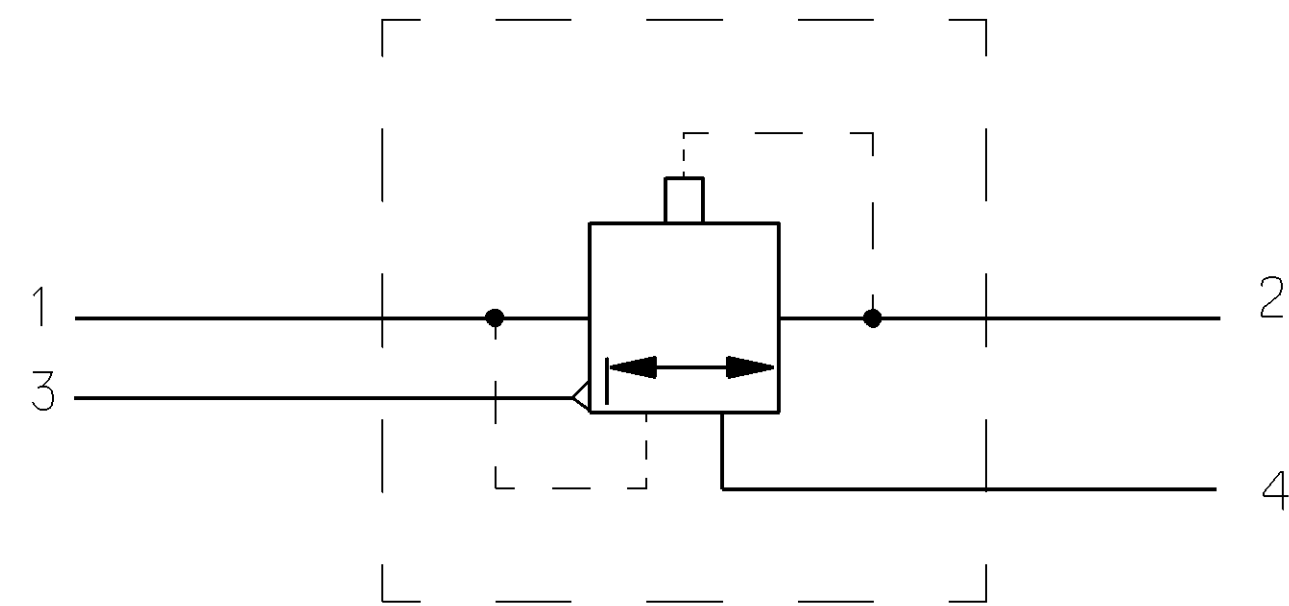
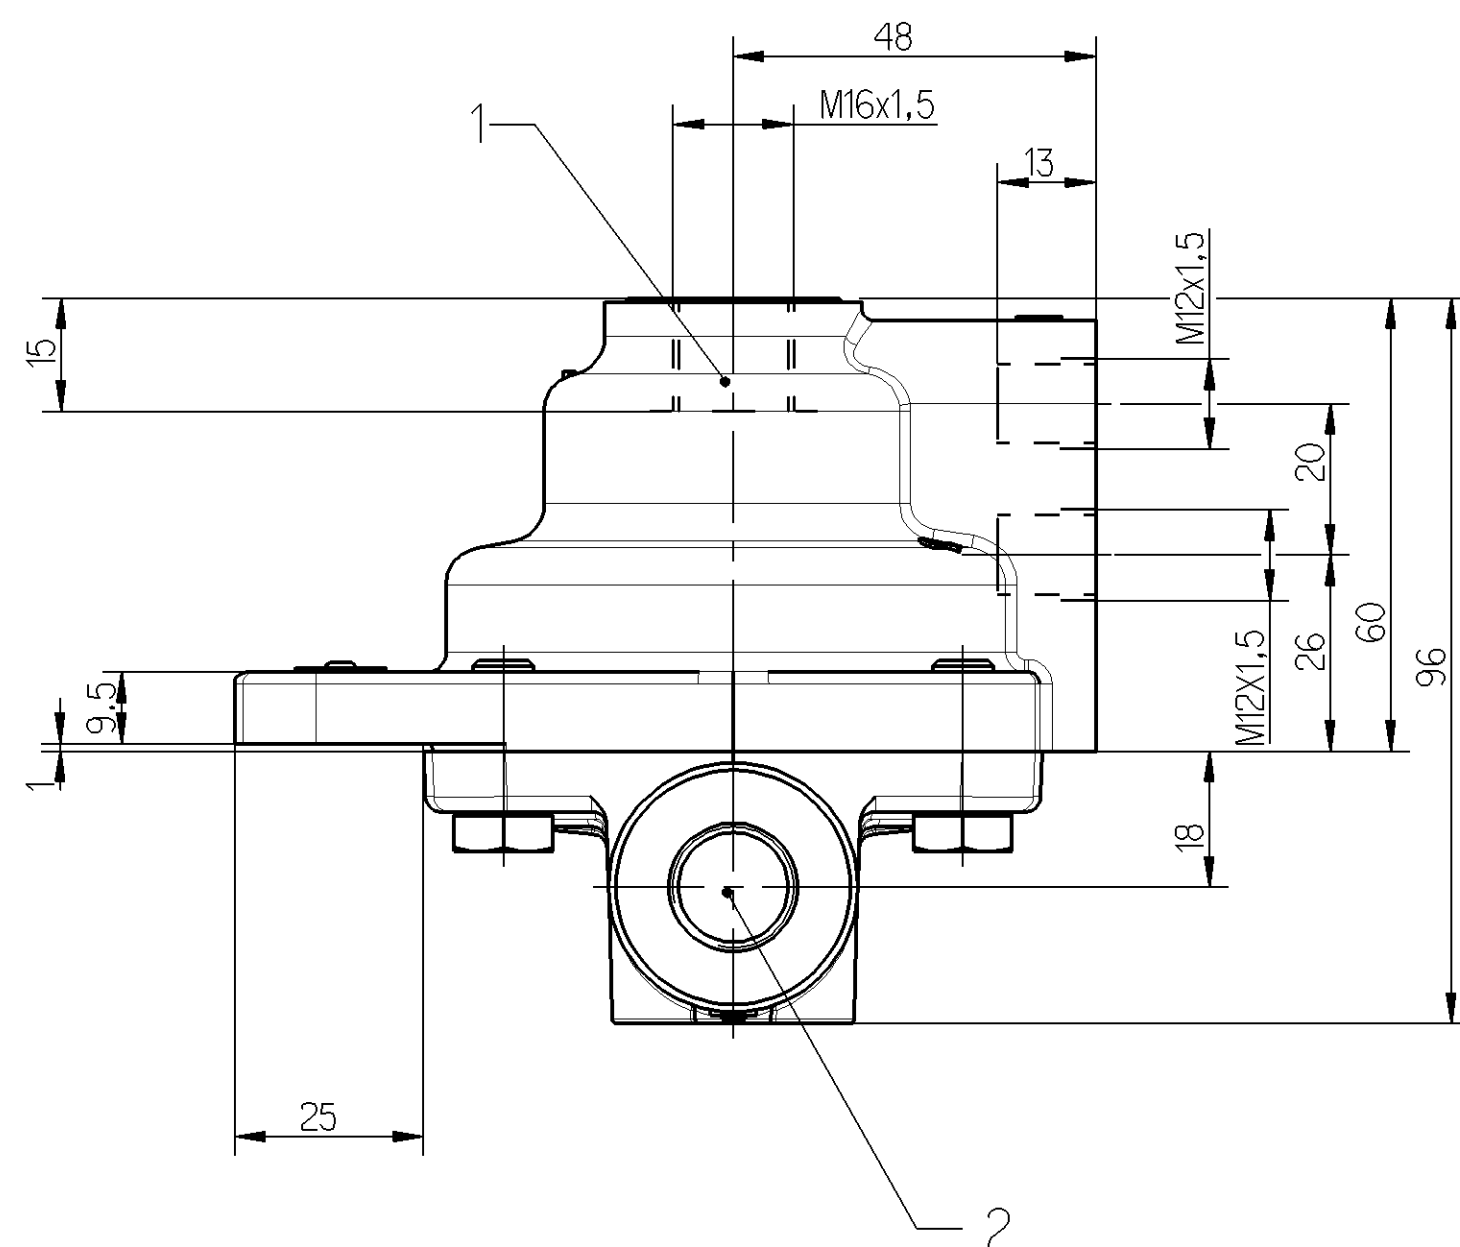


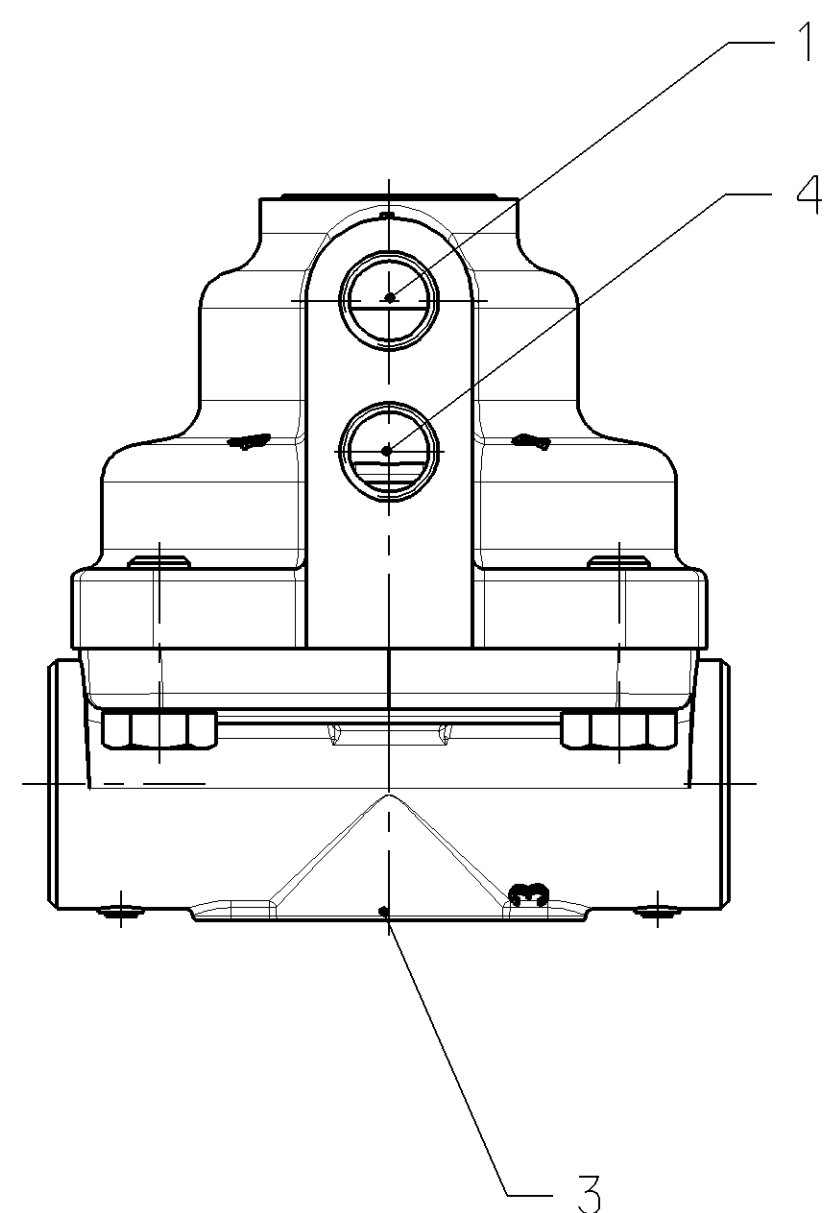

MEDIUM
MEDIUM
FLUIDE
FLUIDO

AIR
LUFT
AIR
ARIA



WORKING PRESSURE
BETRIEBSDRUCK
PRESSION D'UTILISATION
PRESSIONE DI ESERCIZIO

pe max = 10 bar

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
GAMME D' APPLICATION THERMIQUE
CAMPO DI APPLICAZIONE TERMICA

- 40°C.....+ 80°C

INSTALLATION POSITION AS DRAWN
EINBAULAGE WIE GEZEICHNET
POSITION D' INSTALLATION SUIVANT DESSIN
POSIZIONE DI MONTAGGIO COME DISEGNATO

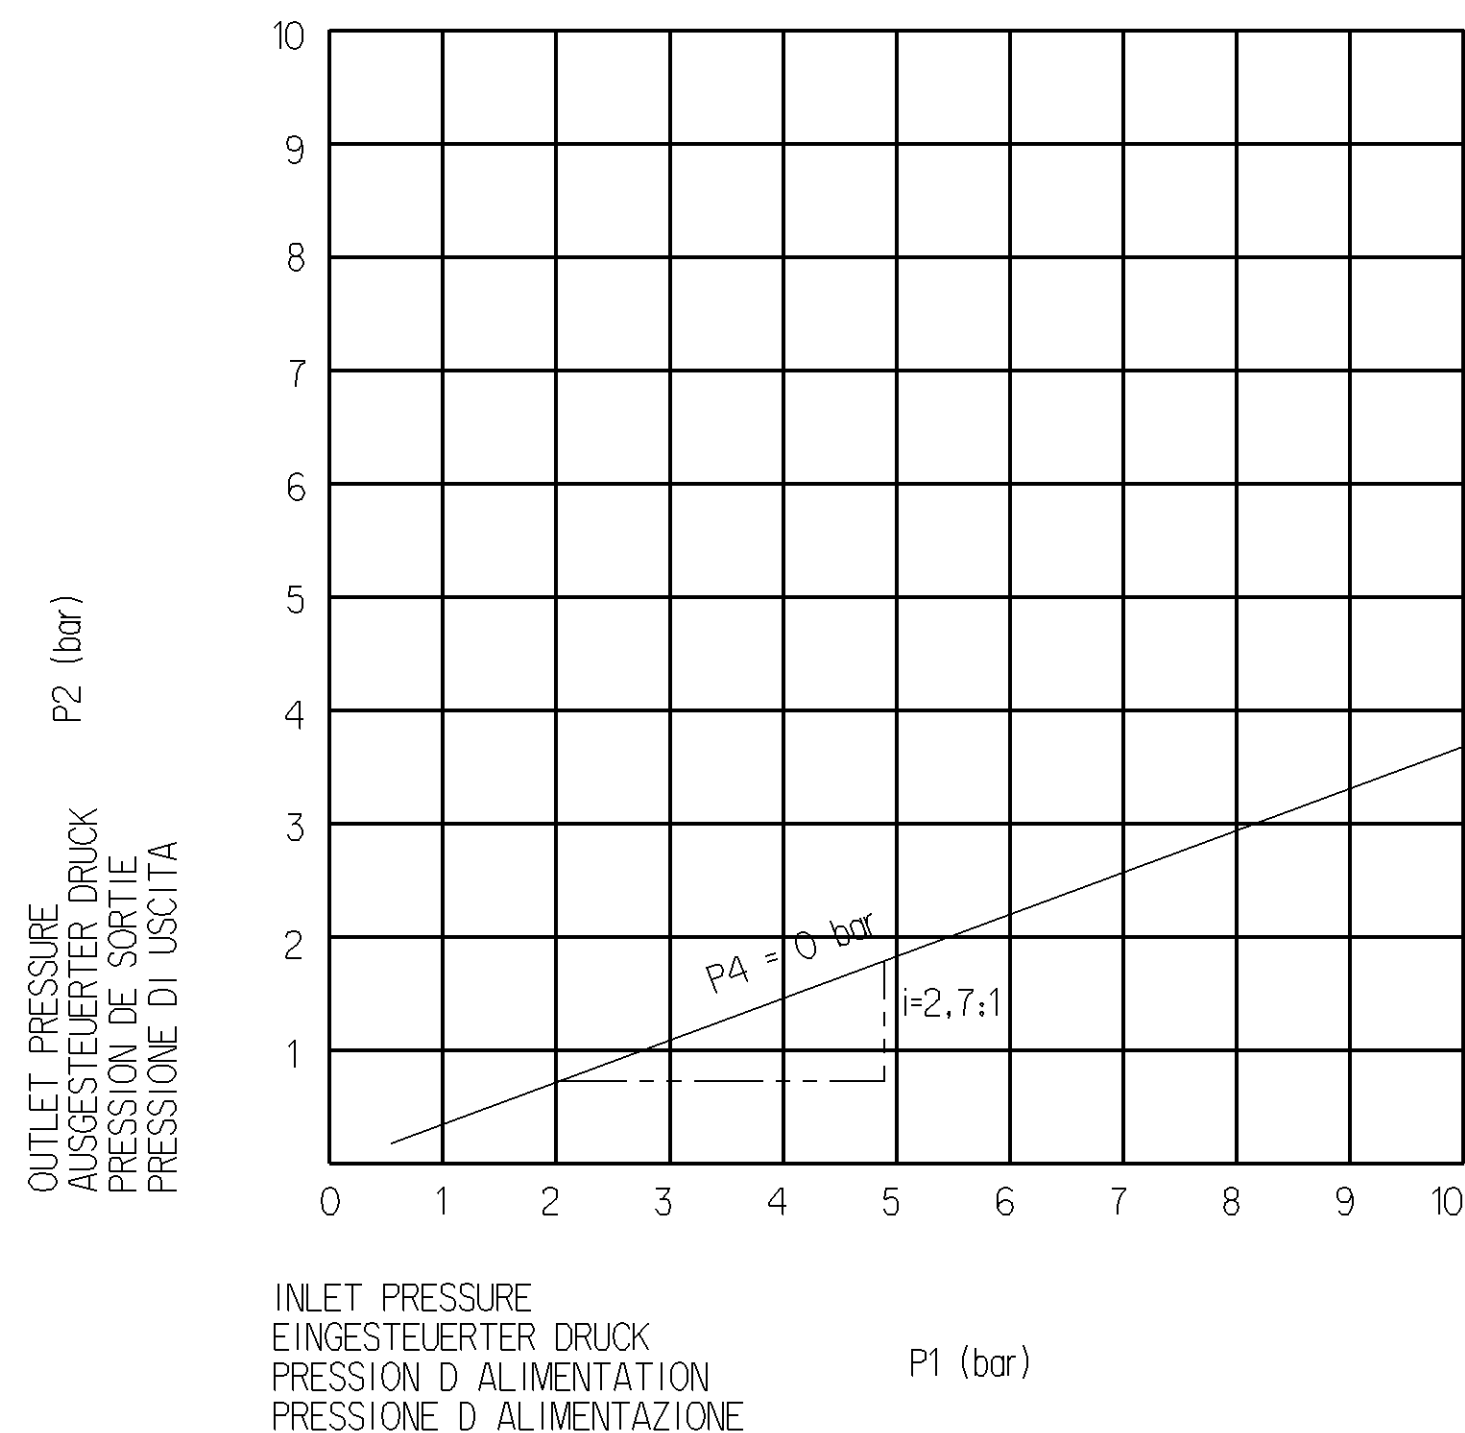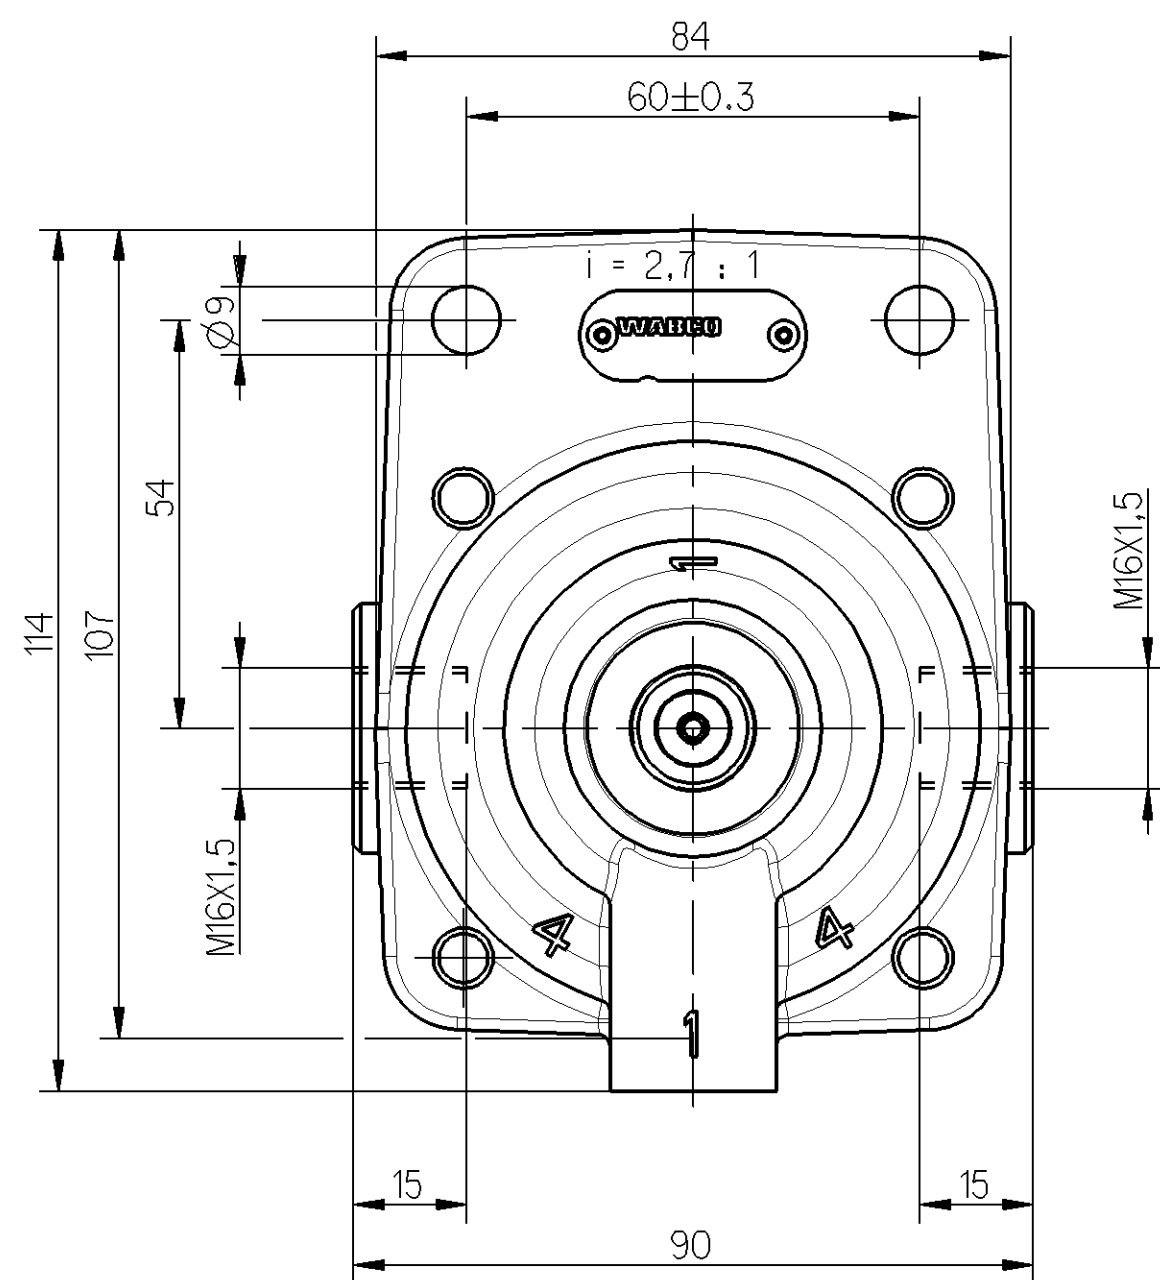

TORQUE FOR CONNECTIONS,
ANZUGSMOMENT FÜR EINSCHRAUBSTUTZEN: M12x1.5: $M_{\max} = 21 \text{ Nm}$
COUPLE DE SERRAGE DES RACCORDS: M16x1.5: $M_{\max} = 34 \text{ Nm}$
COPPIA DI SERRAGGION DEI RACCORDI:

General Specification: JED-334-O				Copyright WABCO ®		 LOAD PROPORTIONING VALVE LAST-LEERVENTIL VALVE VIDE-CHARGE VALVOLA MOTO-CARICO			
Further Technical Data:				Date	Signature				
Doc. Code:		Sheet:	Ta	2005-09-26	<u>Rajasekaran</u>				
General Tolerances JED-261				Checked					
Range of Nominal Dimensions (± mm)				2007-07-31	<u>Pfeiffer</u>				
				Expert					
				Pfeiffer					
				Mass	Scale	Material No.		WABCO Is. No.: 473 300 012 0	
				0.729	1:1	473 300 012 0		Doc.Code	Language
				kg				005	en/de
				Size	TRI			fr/it	1/1
				A 1	530			Function Code	CAD System
								Prod.Type	Replacement for
								Pro/E	00 X
								473 300 012 0	OF 78-10-11
				100mm					