


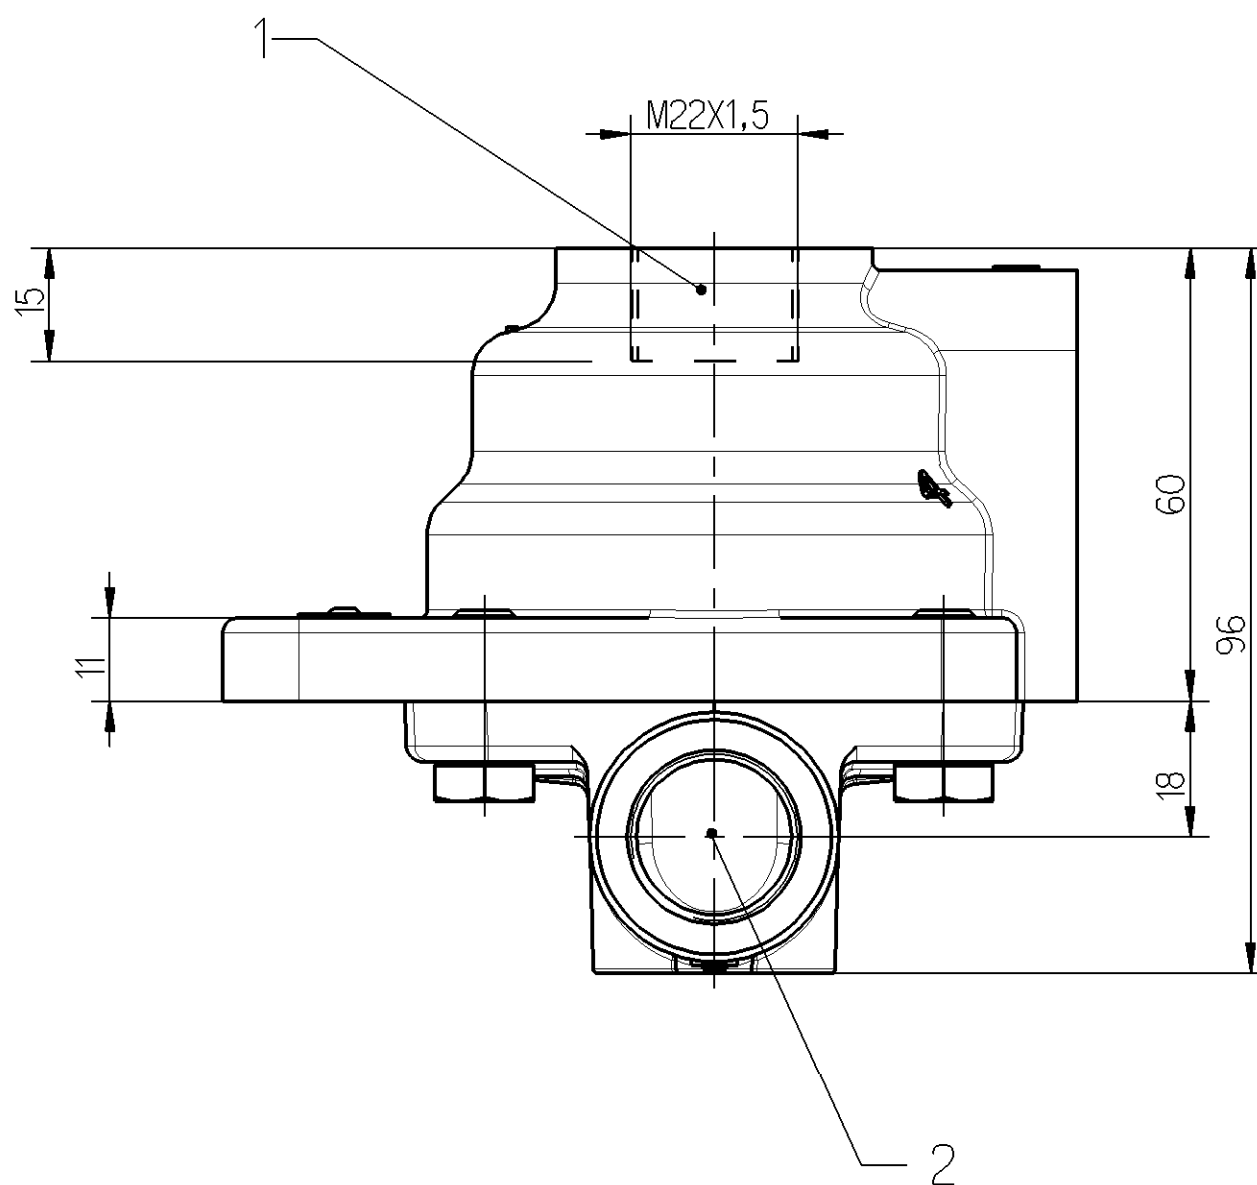


WORKING PRESSURE
BETRIEBSDRUCK
PRESSION D'UTILISATION
PRESSIONE DI ESERCIZIO

pe max = 10 bar

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
GAMME D' APPLICATION THERMIQUE
CAMPO DI APPLICAZIONE TERMICA

- 40°C....+ 80°C


INSTALLATION POSITION AS DRAWN
EINBAULAGE WIE GEZEICHNET
POSITION D'INSTALLATION SUIVANT DESSIN
POSIZIONE DI MONTAGGIO COME DISEGNATO

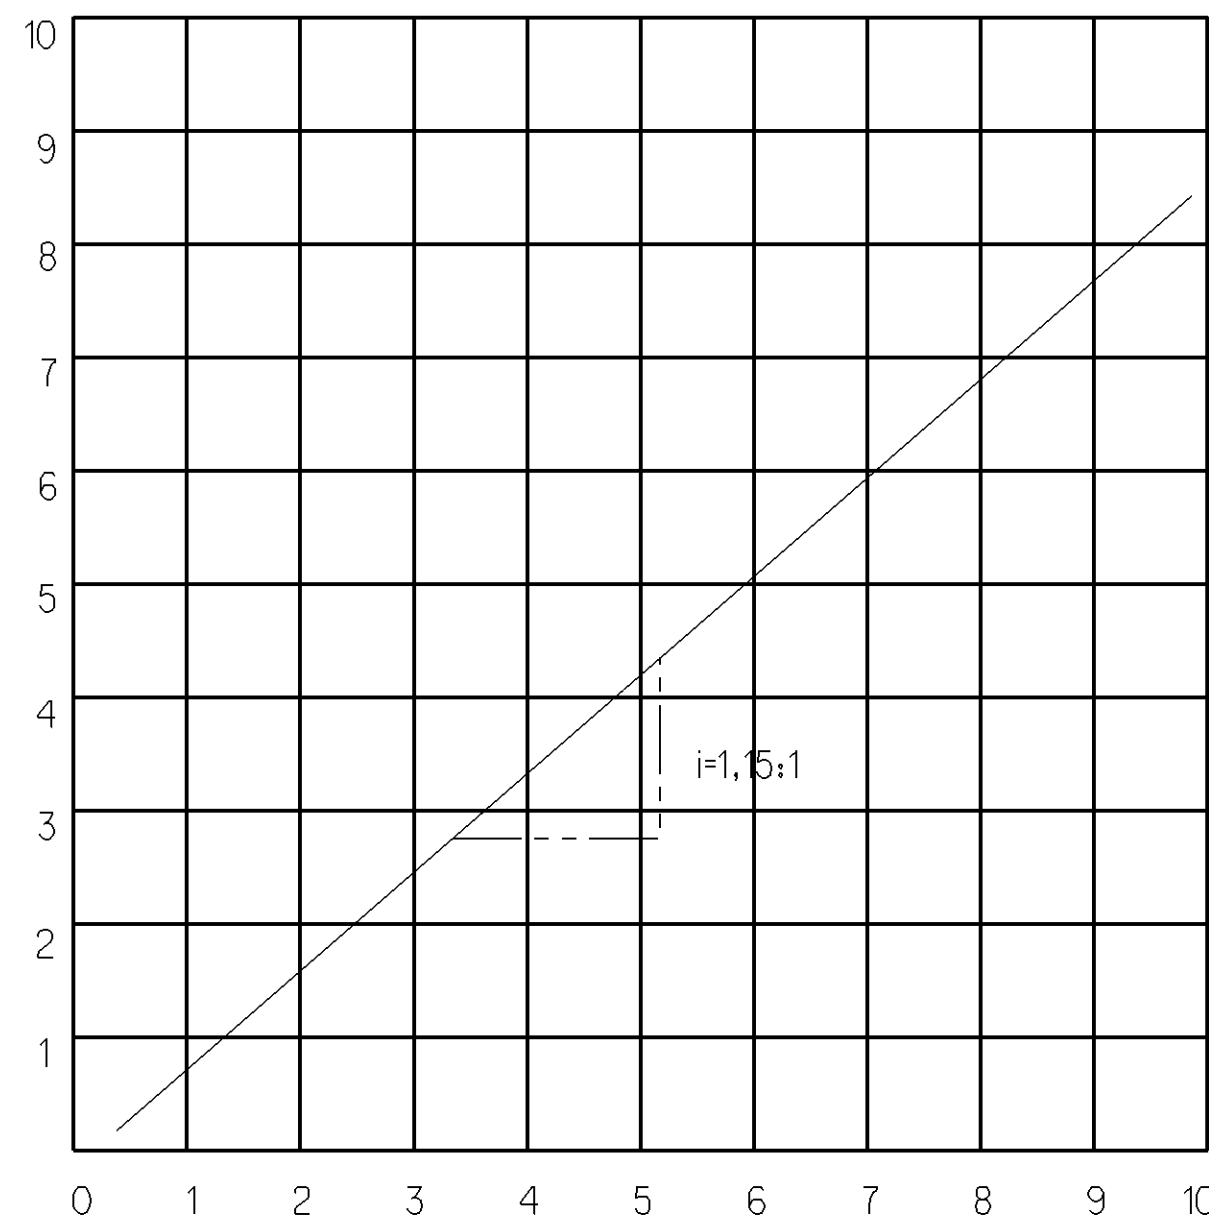

INLET PRESSURE	
EINGESTEUERTER DRUCK	
PRESSION D ALIMENTATION	P1 (bar)
PRESSIONE D ALIMENTAZIONE	

1	INLET EINGANG ALIMENTATION ALIMENTAZIONE
2	OUTLET AUSGANG SORTIE USCITA
3	EXHAUST ENTLUEFTUNG ECHAPPMENT SCARICO

TORQUE FOR CONNECTIONS,
ANZUGSMOMENT FÜR EINSCHRAUBSTUTZEN: M22x1.5: $M_{\max} = 53 \text{ Nm}$
COUPLE DE SERRAGE DES RACCORDS:
COPPIA DI SERRAGGIONI DEI RACCORDI:

General Specification JED-334-O				Copyright WABCO®				 PRESSURE REDUCING VALVE REDUZIERVENTIL VALVE DE REDUCTION VALVOLA LIMITATRICE			
Further Technical Data:				Date		Signature					
Doc. Code:		Sheet: To		Drawn		Checked					
General Tolerances JED-261				2005-09-22		Karthikeyan					
Range of Nominal Dimensions (± mm)				2007-08-01		Pfeiffer					
				Expert		Pfeiffer					
Class 1)				Mass		Scale		Material No.			
≤ 50 > 50 > 180 > 400 > 400 Δ ≤ 180 ≤ 180 ≤ 400 ≤ 400 ≤ 400				0.802		1:1		473 301 003 0			
Fine				kg				WABCO Ids. No.: 473 301 003 0			
Medium				1:1				Doc. Code L (original) Sheet			
Coarse				TRI				005 en/de fr/it 1/1			
098969 C 2005-09-22 DOV-No. , Rev. , Date State of Revision				Tapped Holes acc. ISO 4039/JED-152 1) Tolerance Class Applied Crossmarked		A 1 530 		Function Code CAD System Prod.Type Replacement for Pro/E 00 X 473 301 003 0 OF 78-10-24			