
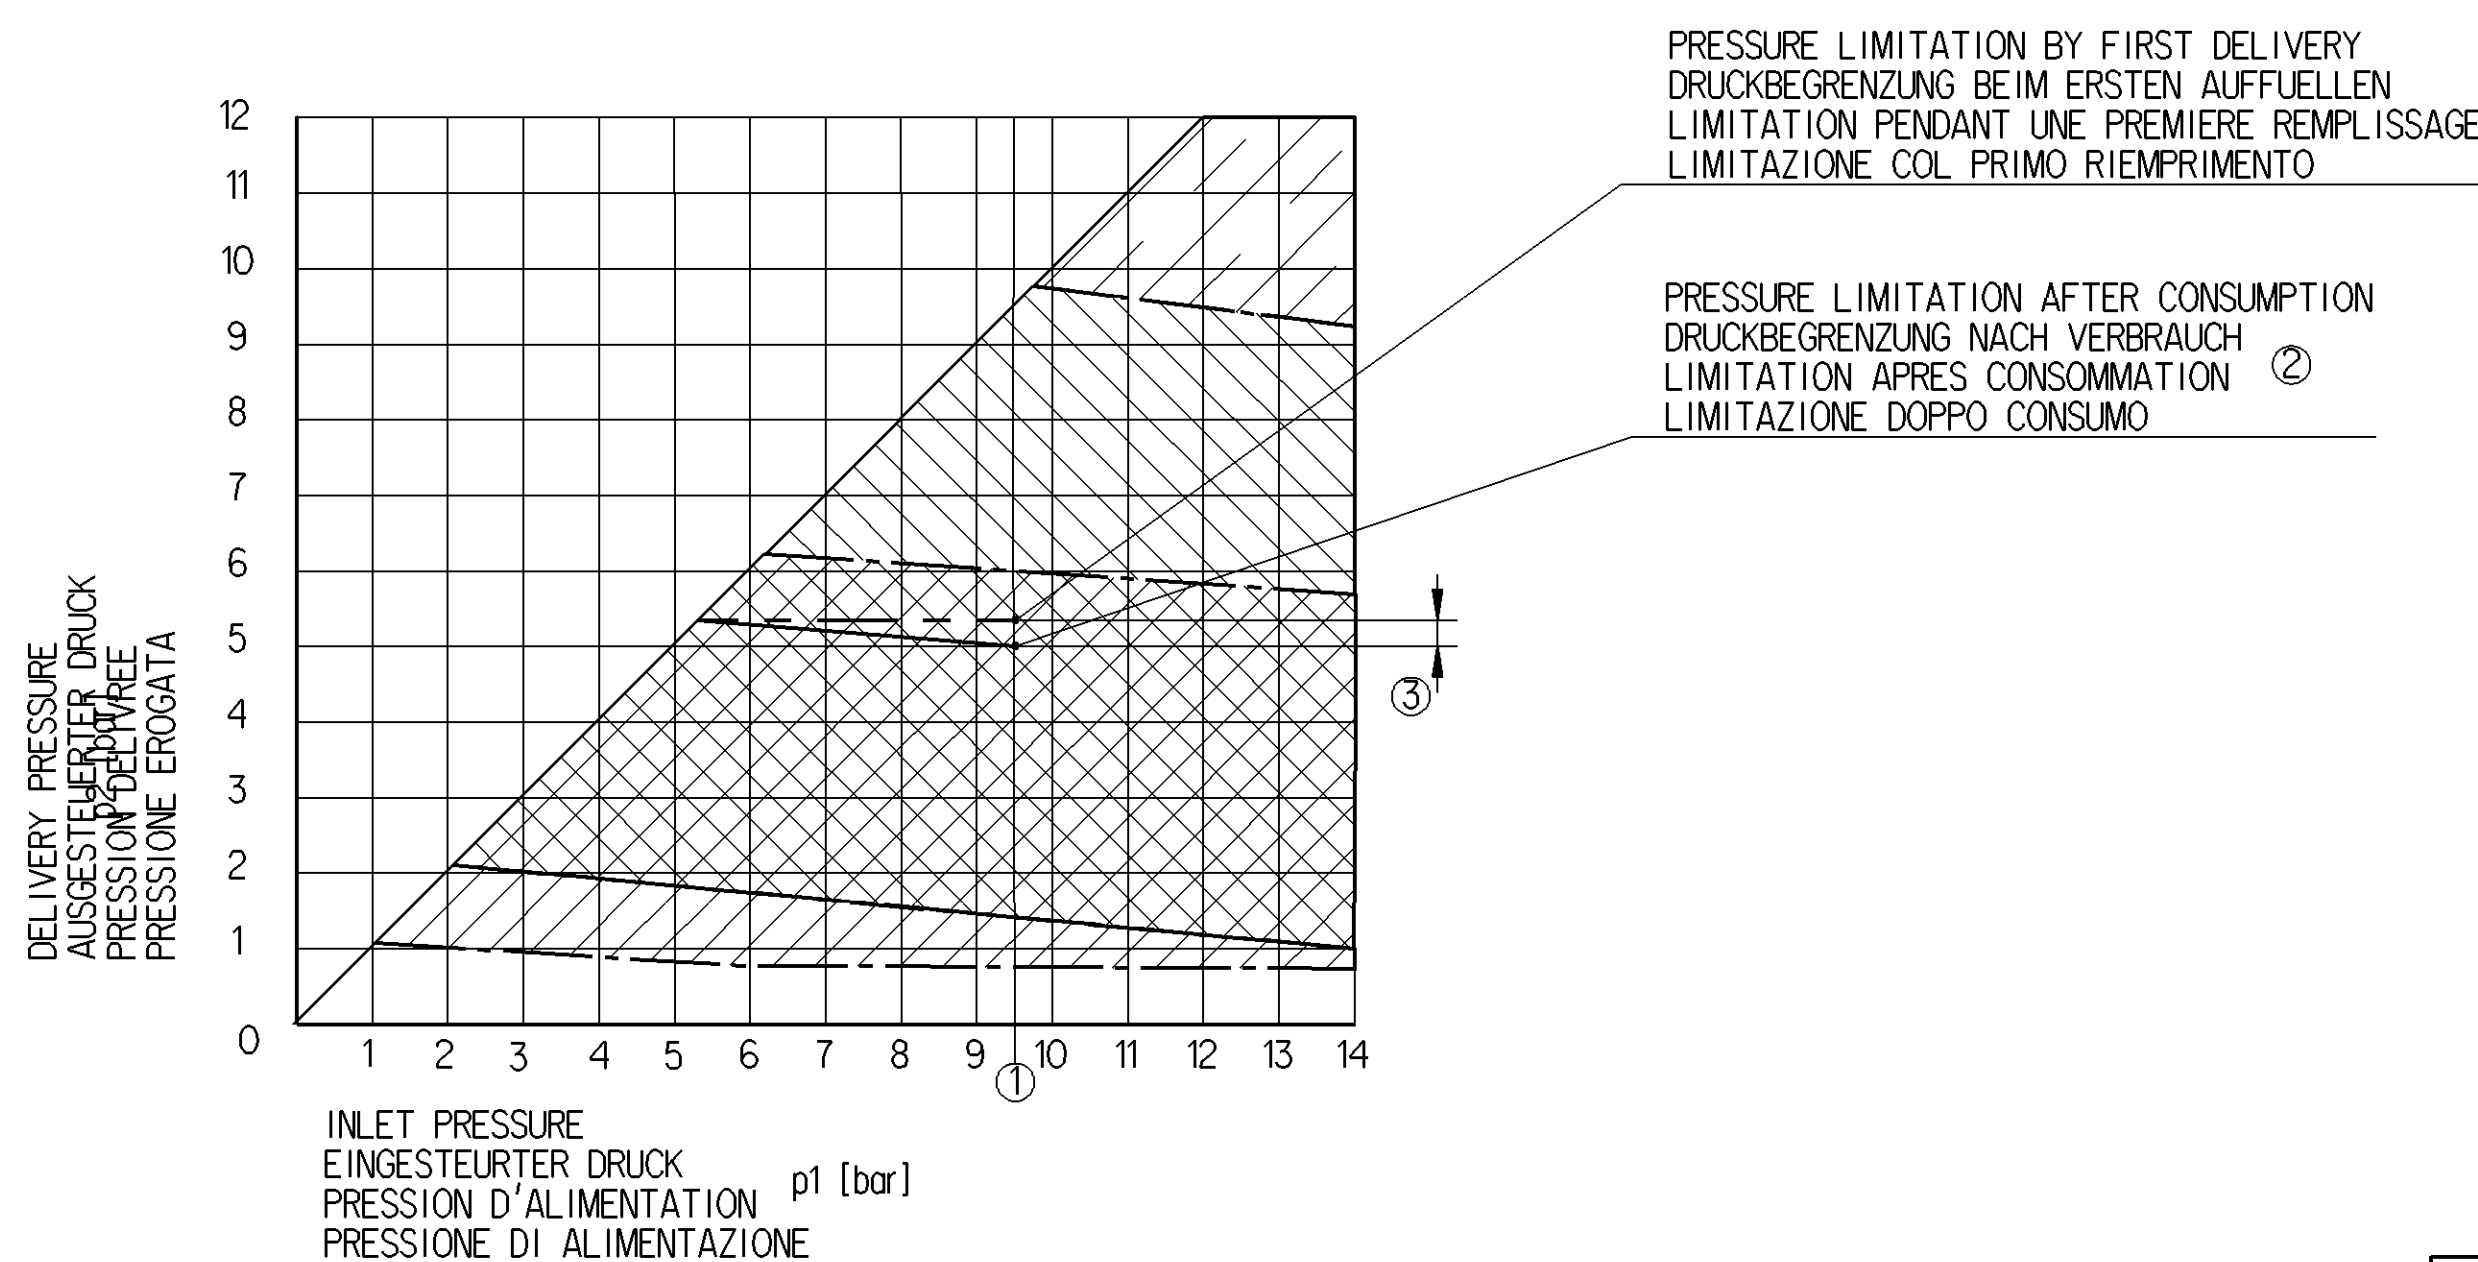
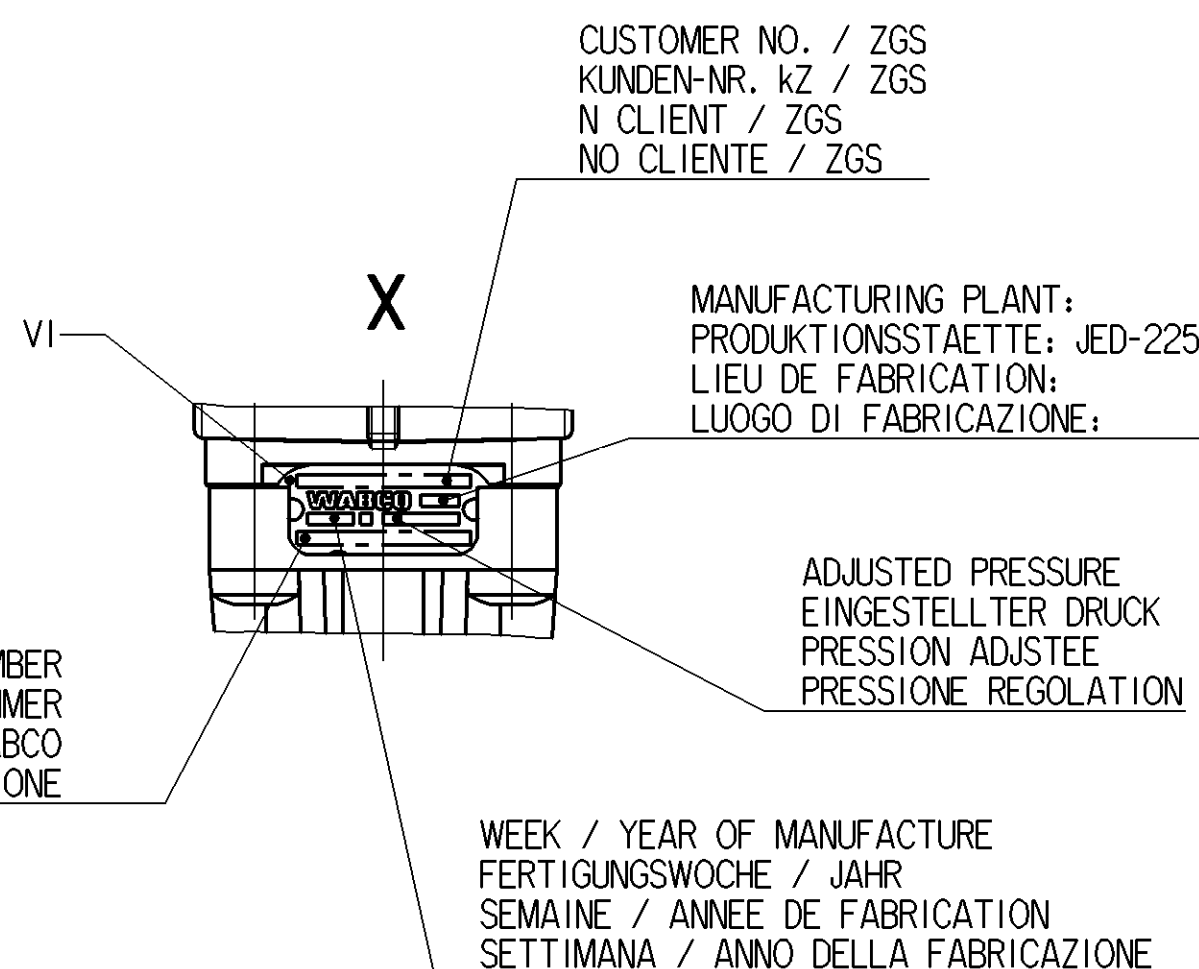
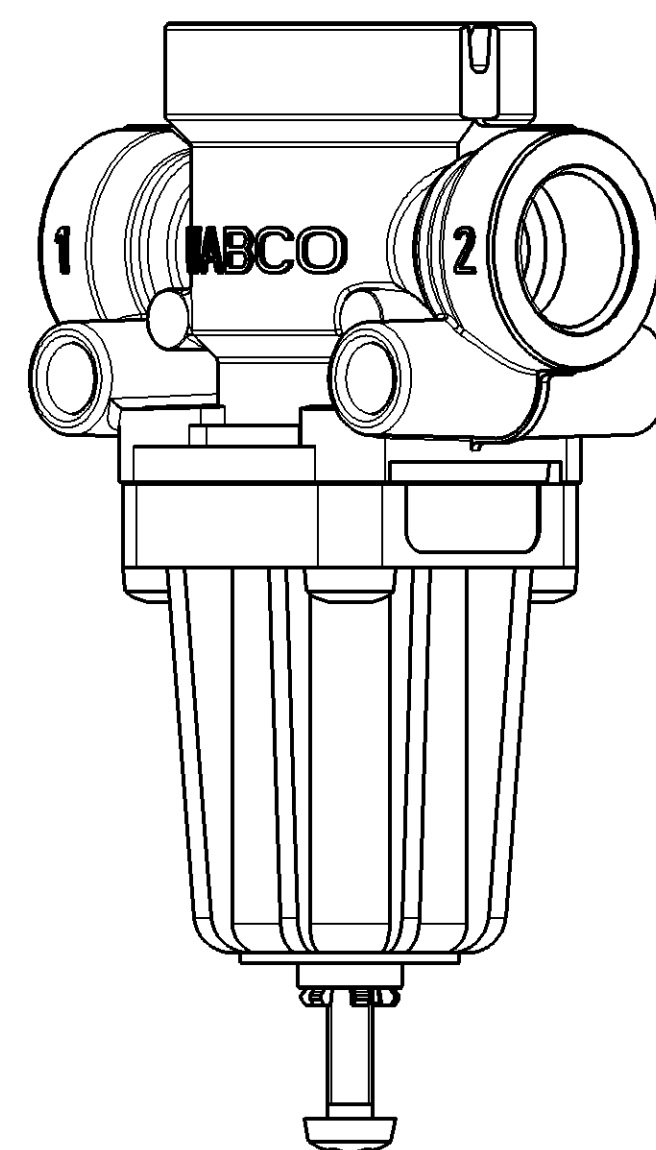
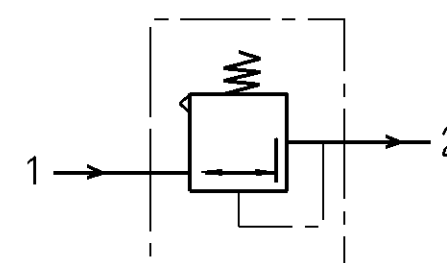
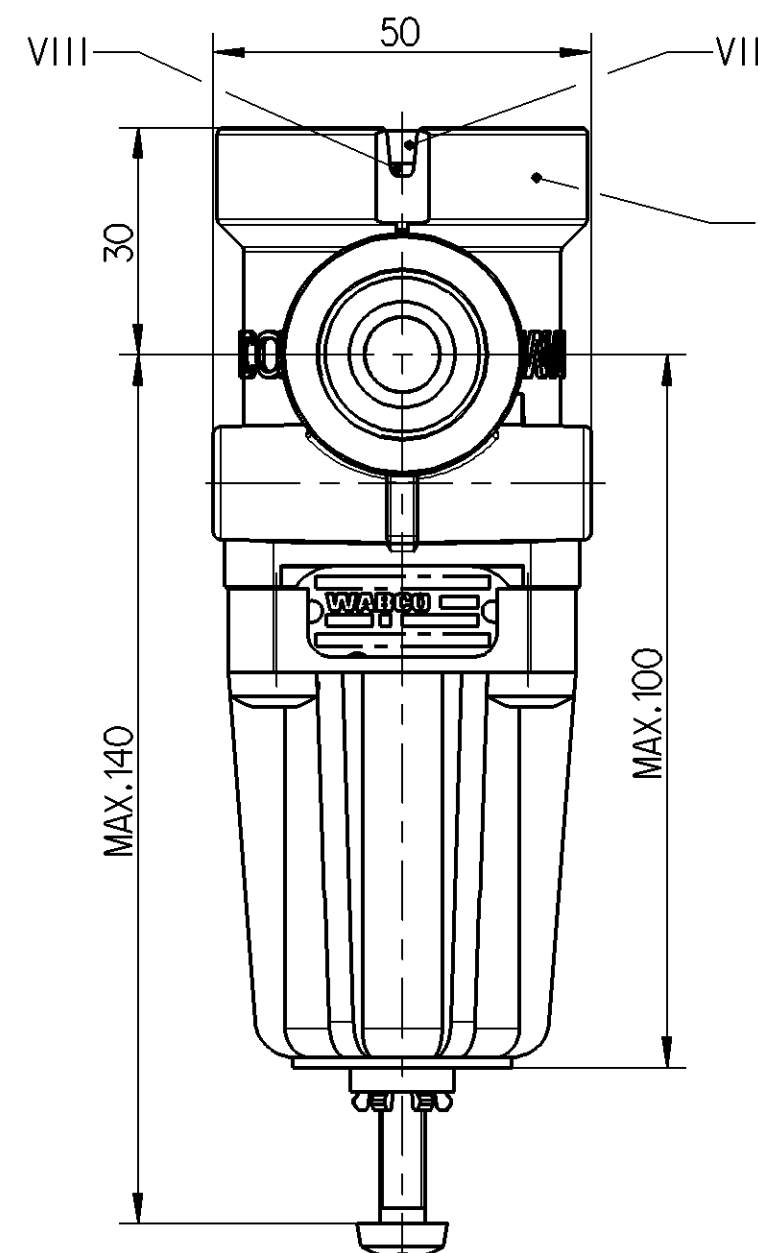


		1	2	
A		MATERIAL AND SURFACE PROTECTION		
	I	JED-029 M1 / C / JED-259-0		
	II	PBT-GF black	JED-352-1	
	III	JED-051 M4 / JED-739-3		
	IV	POM black	JED-005 M1	
B	V	NBR	JED-235	
	VI	AL JED-077 M1 / JED-007-1		
	VII	PET-GF black	JED-357-1	
	VIII	Fe	JED-048 M1 /	phos. / JED-731-6
	IX	JED-050 M1 / JED-739-3		

MEDIUM	:	AIR		
MEDIUM	:	LUFT		
FLUIDE	:	AIR		
FLUIDO	:	ARIA		
THERMAL RANGE OF APPLICATION	:			
THERMISCHER ANWENDUNGSBEREICH	:			
GAMME D'APPLICATION THERMIQUE	:	-40° ... +80°C		
CAMPO DI APPLICAZIONE TERMICA	:			
NOMINAL DIAMETER	SUPPLY	:	EXHAUST	:
NENNWEITE	BELUEFTUNG	:	ENTLUEFTUNG	:
DIAMETRE NOMINAL	ALIMENTATION	:	ECHAPPEMENT	:
DIAMETRO NOMINALE	ALIMENTAZIONE	:	SCARICO	:
		Ø10		Ø4
INSTALLATION POSITION AS DRAWN				
EINBAULAGE WIE GEZEICHNET				
POSITION D'INSTALLATION SUIVANT DESSIN		±45°	PROTECTED	
POSIZIONE DI MONTAGGIO COME DISEGNATO			GESCHÜTZT	
			PROTEGES	±90°
			PROTETTI	
1=	INLET PRESSURE			
	EINGESTEUERTER DRUCK			
	PRESSION D'ALIMENTATION	p _e max. = 20 bar		
	PRESSIONE DI ALIMENTAZIONE			
2=	DELIVERY PRESSURE			
	AUSGESTEUERTER DRUCK			
	PRESSION DELIVREE			
	PRESSIONE EROGATA			
TORQUE FOR CONNECTIONS	:			
ANZUGSMOMENT FUER EINSCHRAUBSTUTZEN	:			
COUPLE DE SERRAGE DES RACCORDS	:	M22x1.5; Mmax. = 53 Nm		
COPPIA DI SERRAGGIO DEI RACCORDI	:			

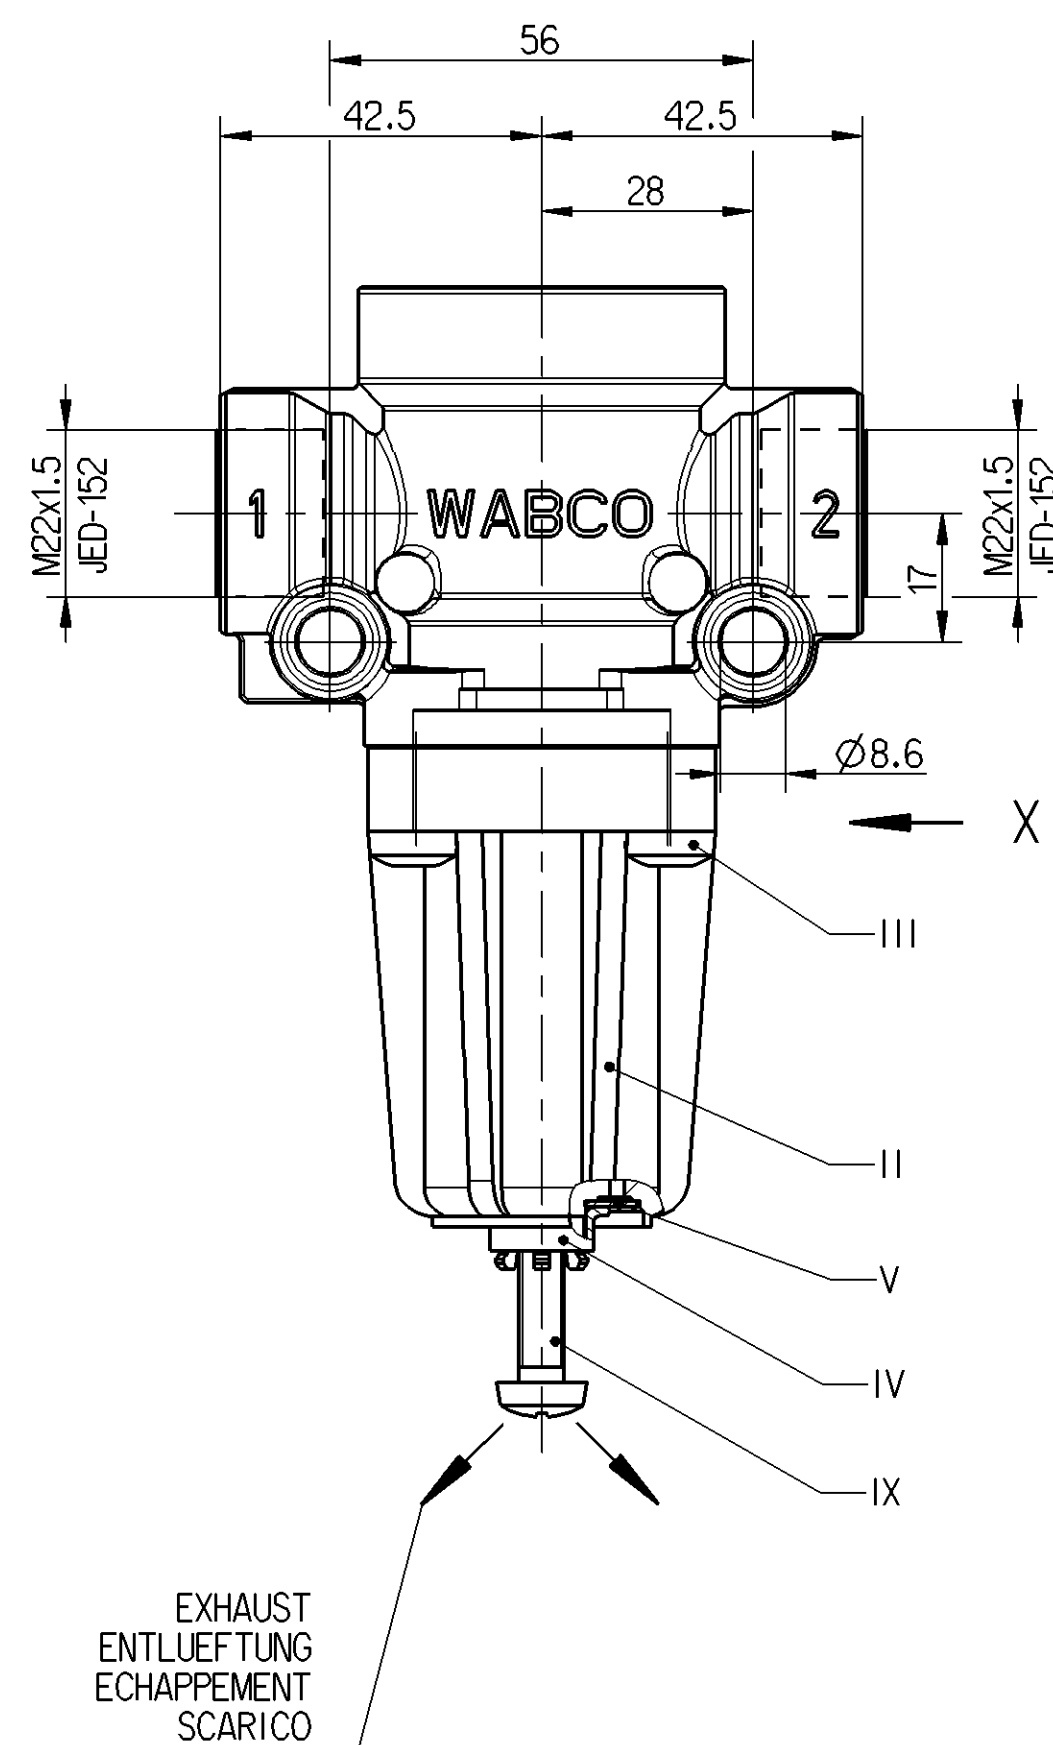

6.3	4.8 +0/-0.2	0.4	475 010 327 0		
8	1.4 +0.3/-0	0.6	475 010 324 0		
7.5	3.3 +0.3/-0	0.4	475 010 313 0		
7.5	5.5 +0.2/-0	0.4	475 010 312 0		
8.5	3.5 +0.3/-0	0.4	475 010 311 0		
7.5	4 +0.3/-0	0.4	475 010 310 0		
7.5	5.7 +0.3/-0	0.4	475 010 309 0		
10	7.8 +0.3/-0	0.4	475 010 308 0		
8	1.8 +0.3/-0	0.6	475 010 307 0		
9.5	5 +0/-0.2	0.4	475 010 306 0		
7.5	6 +0.3/-0 ⑥	0.4	475 010 305 0		
12	7.5 +0.3/-0	0.4	475 010 304 0		
7.5	1.8 +0.3/-0	0.6	475 010 303 0		
7.5	5.3 +0.3/-0	0.4	475 010 302 0		
12.5	10 ±0.3	0.4	475 010 301 0		
① P1 [bar]	② P2 [bar]	③ MAX. [bar]	WABCO	CUSTOMER'S NO. KUNDEN-NR. NO. CLIENT NO. CLIENTE	RANGE OF ADJUSTMENT EINSTELLBEREICH GAMME DE REGLAGE CAMPO DI REGOLAZIONE

IT IS FORBIDDEN TO ASSEMBLE THE PLV IF IT IS UNDERGONE A SHOCK BEFORE
ES IST VERBOTEN DEN PLV ZU MONTIEREN, WENN ER ZUVOR AUF DEN BODEN GEFALLEN IST
IL EST INTERDIT D'ASSEMBLER UN PLV SI IL A SUBI UN CHOCK AUPARAVANT
E' VIETATO DI CONGEGNARE UN PLV SE A SUBITO UN URTO PRIMA

General Specification: JED-334-0				Copyright WABCO®		WABCO PRESSURE LIMITING VALVE DRUCKBEGRENZUNGSVENTIL VALVE DE LIMITATION DI PRESSION VALVOLA LIMITATRICE DI PRESSIONE									
Further Technical Data:				Date						Signature					
Doc. Code:		Sheet:		To						2013-09-19		Drawn		Kryla	
General Tolerances JED-261				Checked								2013-09-20		Lichtenberg	
Range of Nominal Dimensions (± mm)				Expert		File		Material No.		Date of first issue		1995-08-21			
								Mass		Scale		Sheet			
								0.395 kg		1:1		475 010 399 0			
								Size		CAD System					
								A 1		Pro/E					
Tapped Holes acc.								ECON-No.		Revision		Techn. Resp.			
1) Tolerance Class Applied Crossmarked								162628		1 G		5160			
										Replacement for					
17								1.4				100mm			