


Copyright notice: This drawing is the property of WABCO. It is not to be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of WABCO. The use of this drawing for any purpose other than that for which it was intended constitutes an infringement of the patent rights of WABCO. All rights are reserved in the event of the grant of a patent or the registration of an utility model or design. This drawing is subject to copyright.

Copyright notice: This drawing is the property of WABCO. It is not to be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of WABCO. The use of this drawing for any purpose other than that for which it was intended constitutes an infringement of the patent rights of WABCO. All rights are reserved in the event of the grant of a patent or the registration of an utility model or design. This drawing is subject to copyright.

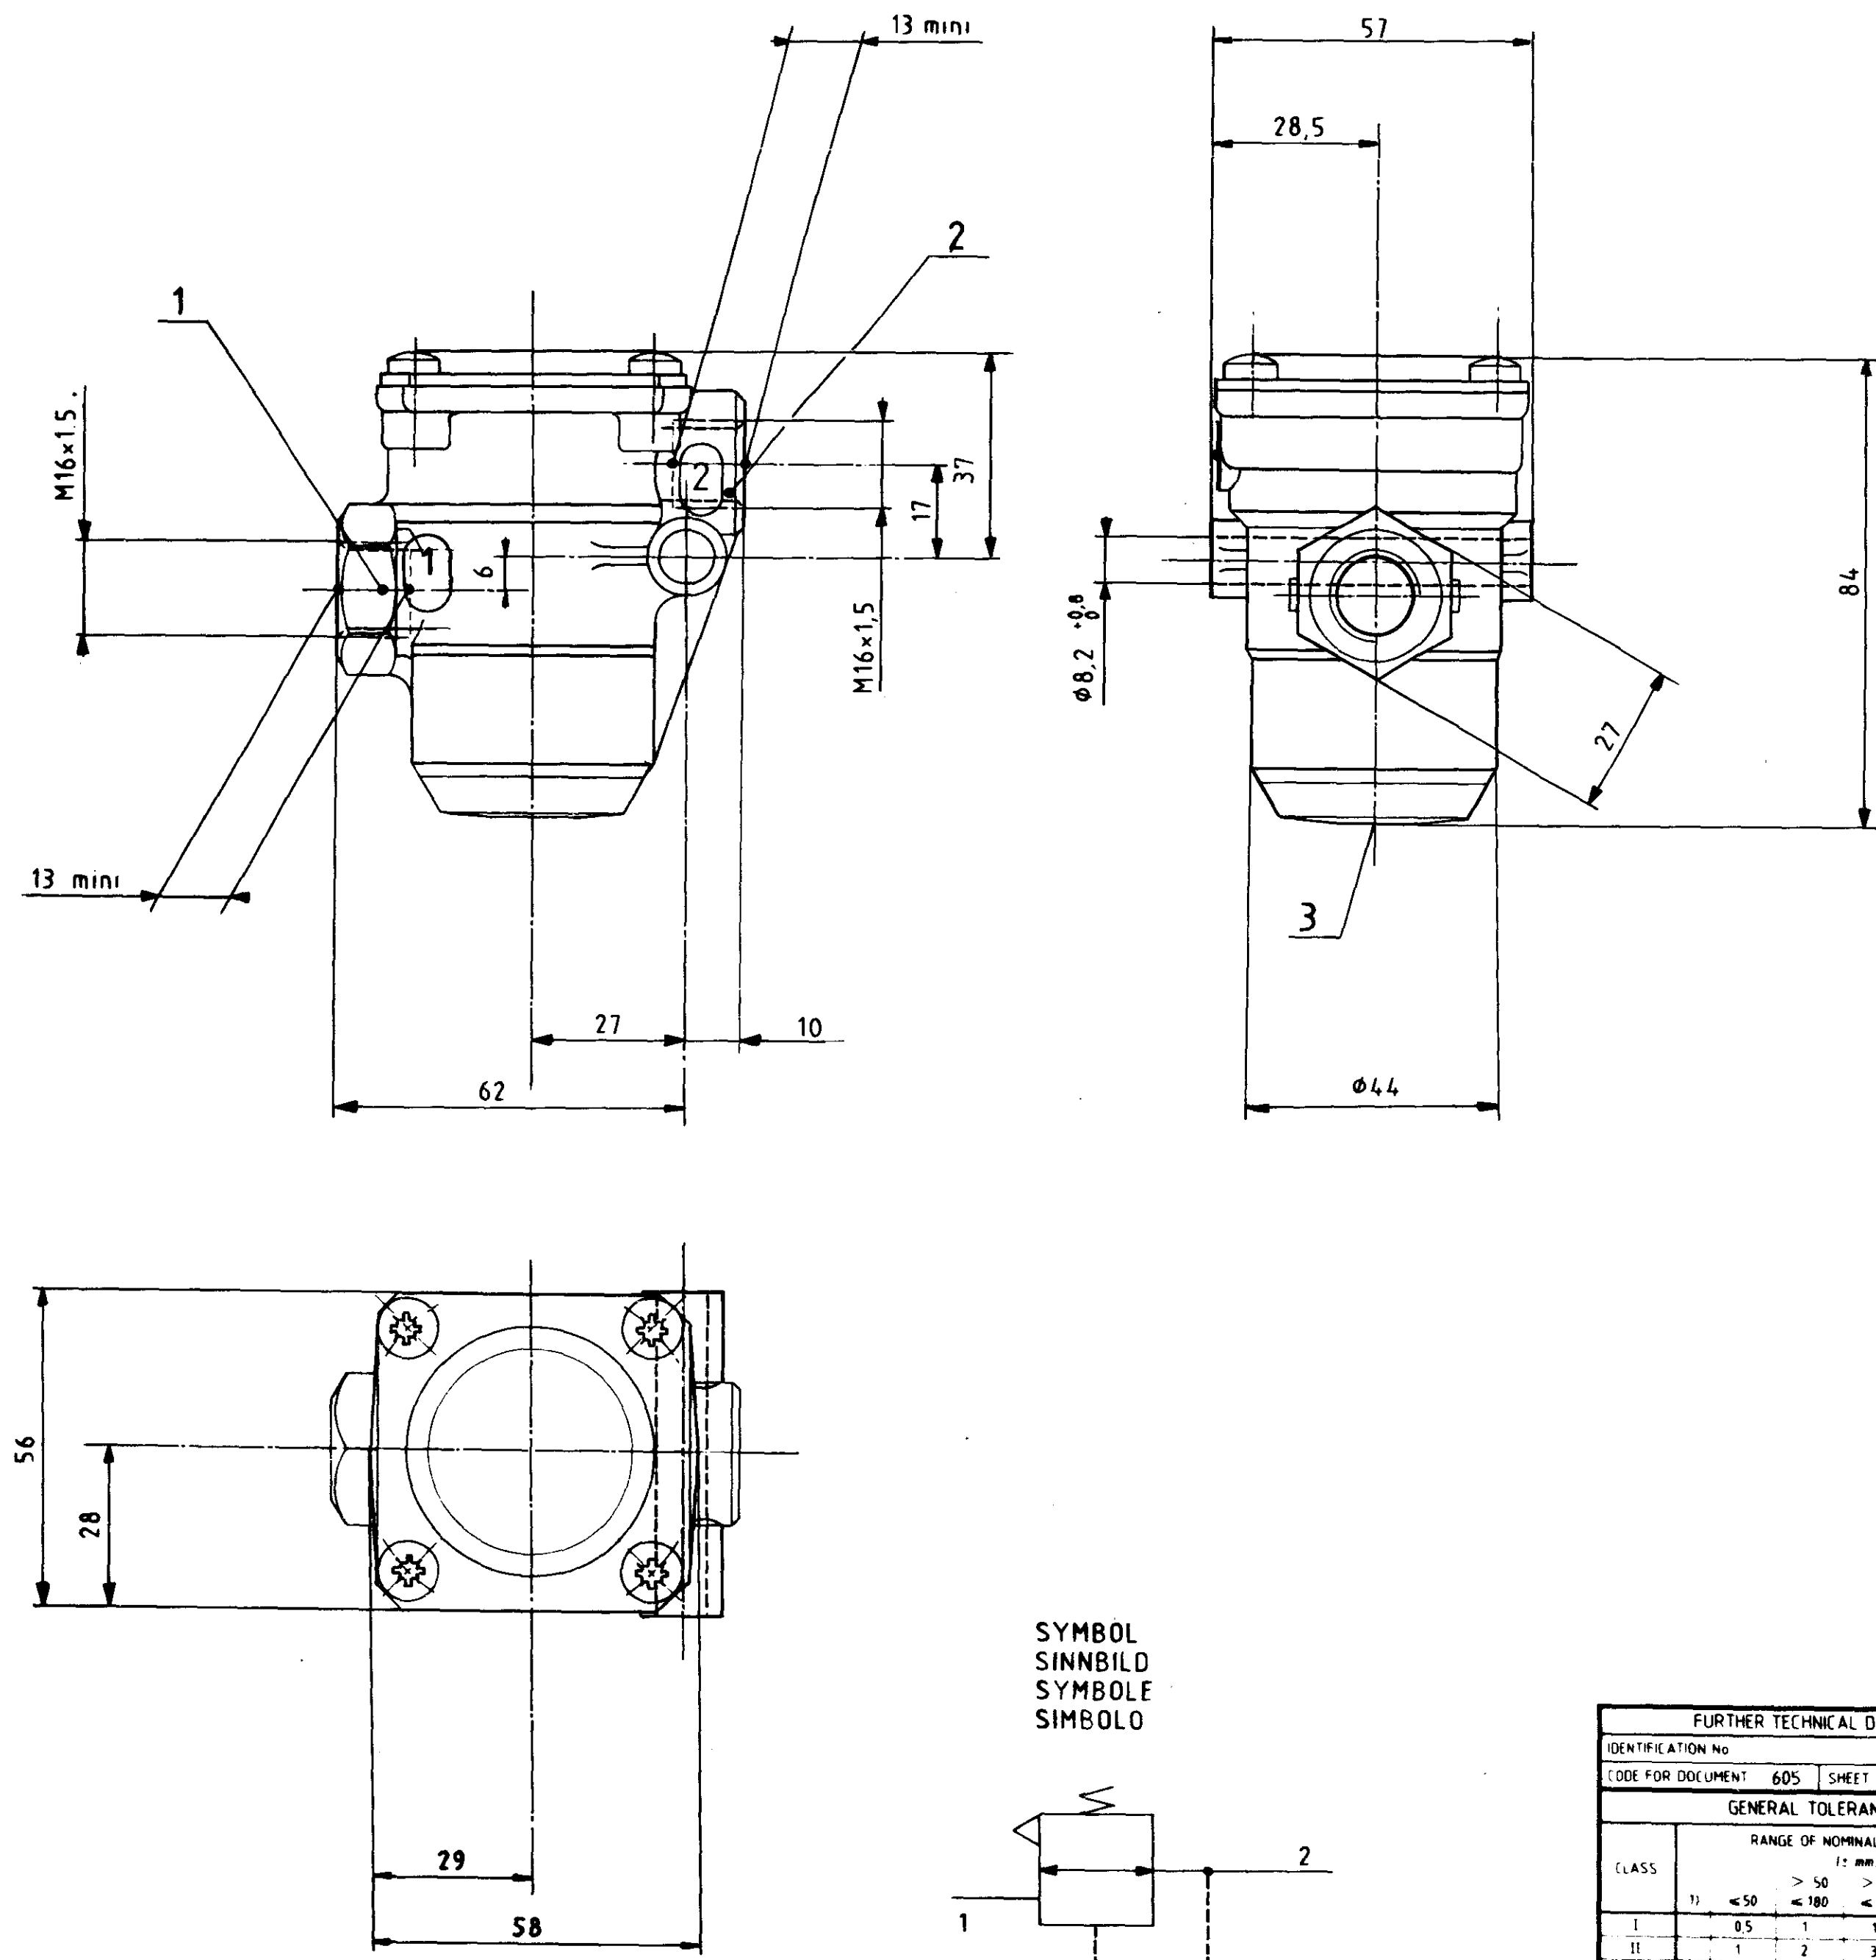

SYMBOL
SINNBILD
SYMBOLE
SIMBOLO

THERMAL RANGE OF APPLICATION THERMISCHER ANWENDBEREICH GAMME D'APPLICATION THERMIQUE CAMPO DI APPLICAZIONE TERMICA		-40°C +80°C
TORQUE FOR CONNECTIONS ANZUGSMOMENT FÜR EINSCHRAUBSTUTZEN COUPLE DE SERRAGE DES RACCORDS COPPIA DI SERRAGGIO DEI RACCORDI		34 Nm MAXI
1	AIR INLET VORRATSLEITUNG ALIMENTATION ALIMENTAZIONE	(HIGH PRESSURE) (HOCHDRUCK) (HAUTE PRESSION) (ALTA PRESSIONE)
2	DELIVERY AUSGESTEUERTE LUFT UTILISATION UTILIZZAZIONE	(LOW PRESSURE) (NIEDERDRUCK) (BASSE PRESSION) (BASSA PRESSIONE)
3	AIR EXHAUST ENTLEFTUNG ECHAPPEMENT SCARICO	
DELIVERY PPRESSURE AUSGESTEUERTER DRUCK PRESSION D'UTILISATION PRESSIONE D'UTILIZZAZIONE		FOR FUER POUR PER $P_2 = 5.7 \pm 0.2 \text{ bar}$ $P_1 = 8 \text{ bar}$
OPENING OF SAFETY VALVE OEFUNGUNG DES SICHERHEITSVENTILS OUVERTURE DE LA SOUPAPE DE SECURITE APERTURA DELLA VALVOLA DI SECUREZZA		$P_2 + 2.5 \text{ bar (MAXI)}$
NOMINAL DIAMETER MIN. MIN. FREIER DURCHGANG DIAMETRE NOMINAL MIN. DIAMETRO NOMINALE MIN.		10mm (78,5 mm ²)
MEDIUM MEDIUM FLUIDE FLUIDO		AIR LUFT AIR ARIA
INLET PRESSURE EINGESTEUERTER DRUCK PRESSION D'ALIMENTATION PRESSIONE D'ALIMENTAZIONE		IF SI SE IF SI SE $P_1 \text{ MAXI} = 20 \text{ bar}$ $P_1 \text{ MAXI} = 10 \text{ bar}$ CONSTANT UNVERÄNDERLICH CONSTANTE INVARIABLE VARIABLE VERÄNDERLICH VARIABLE

FURTHER TECHNICAL DATA SEE	
IDENTIFICATION No.	
CODE FOR DOCUMENT	605 SHEET 10
GENERAL TOLERANCES	
CLASS	RANGE OF NOMINAL DIMENSIONS (: mm)
I	< 50
II	50 - 180
III	180 - 400
IV	> 400
TAPPED HOLES ACC ISO 4039 / JED-152	
TOLERANCE CLASS APPLIED CROSSMARKED	

COPYRIGHT		WABCO	
DATE	SIGNATURE	PRESSURE LIMITING VALVE DRUCKBEGRENZUNGSVENTIL DETENDEUR VALVOLA LIMITATRICE D. PRESS.	
21/07/00	CABIRO		
21/07/00	CABIRO		
21/07/00	00 272		
MASS	SCALE	PRODUCT IDENTIFICATION NO.	
0,4 kg	1:1	475 015 510 0	
SIZE	TR1		
A 2	210		
		CODE FOR DOCUMENT	SHEET
		605	1/1
		CODE FOR GROUP	REPLACEMENT FOR
		516	