


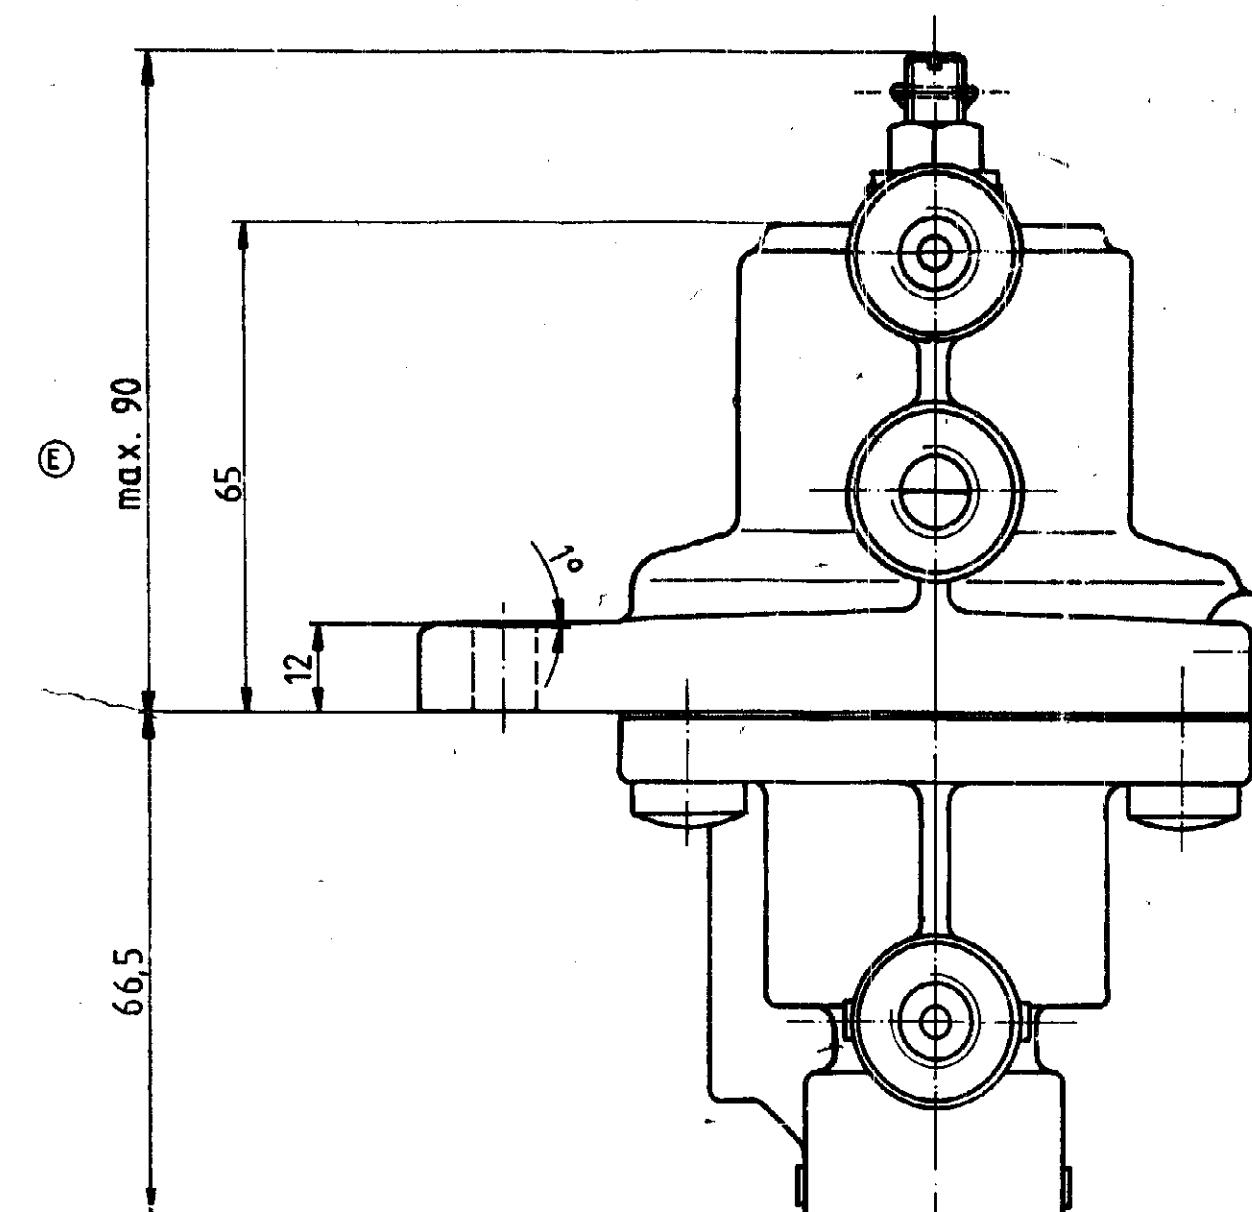

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
GAMME D'APPLICATION THERMIQUE
CAMPO DI APPLICAZIONE TERMICA

WORKING PRESSURE
BETRIEBSDRUCK
PRESSION D'UTILISATION
PRESSIONE DI ESERCIZIO

Pe max. 10 bar

MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA

INSTALLATION POSITION AS DRAWN
EINBAULAGE WIE GEZEICHNET
POSITION D'INSTALLATION SUIVANT DESSIN
POSIZIONE DI MONTAGGIO COME DISEGNATO

NOMINAL DIAMETER
NENNWEITE
DIAMETRE NOMINAL
DIAMETRO NOMINALE


$2,27\text{mm}^2 = \phi 1,7\text{mm} \text{ (D)}$

1 INLET
EINGANG
ALIMENTATION
ALIMENTAZIONE

2 OUTLET
AUSGANG
SORTIE
USCITA

3 EXHAUST
ENTLUEFTUNG
ECHAPPEMENT
SCARICO

4.1/4.2 CONTROL PORT
STEUERANSCHLUSS
ORIFICE DE COMMANDE
ORIFIZIO DI COMANDO

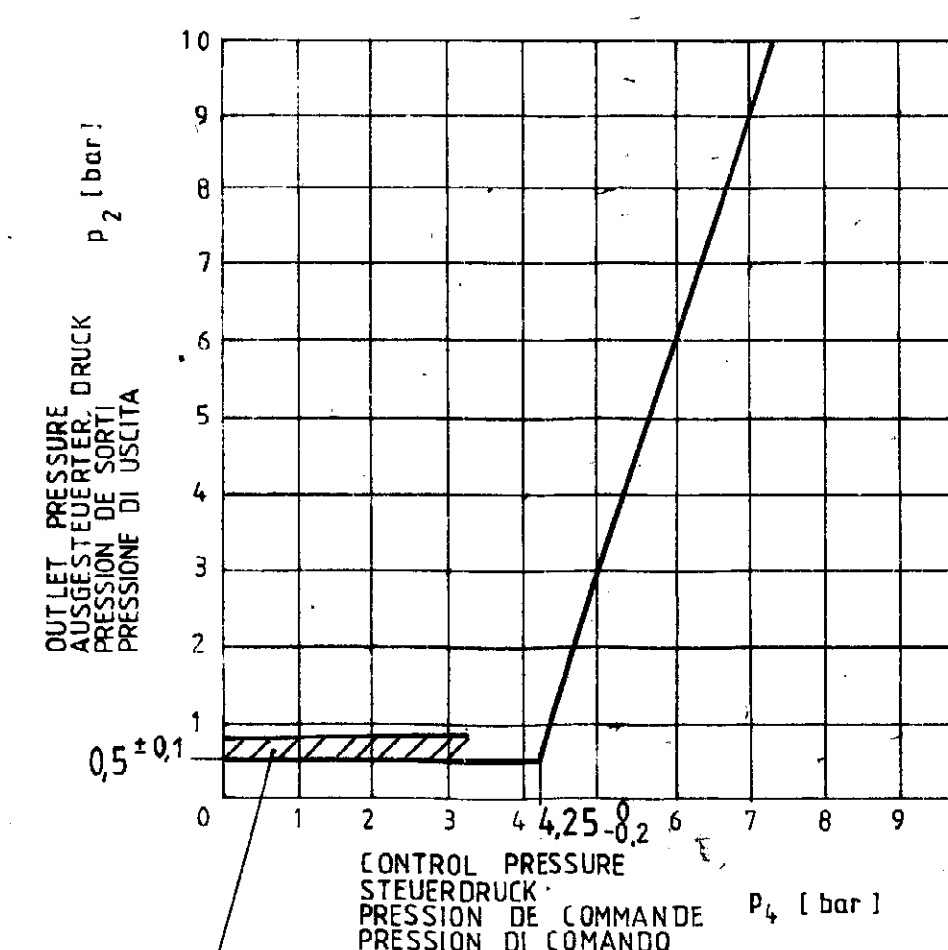

$$p_4 = \frac{p_{4.1} + p_{4.2}}{2}$$

Ⓢ RUECKHALTEDRUCK (DYN.)

GENERAL TOLERANCES									
CLASS	RANGE OF NOMINAL DIMENSIONS (± mm)						★	FORCE, PRESSURE ETC	
	0	≤ 50	≤ 50	≤ 100	≤ 400	> 400			(± μ)
I		0.5	1	15	2				15
II	×	1	2	3	4		3		10
III		2	3.5	5	6.5				20

TAPPED HOLES ACC. ISO 4039

✓ TOLERANCE CLASS APPLIED CROSSMARKED

		COPYRIGHT BY WABCO		WABCO	
		DATE	SIGNATURE		
		79-11-22	<i>Arp</i>	PRESSURE CONTROL RELAY VALVE	
		79-11-22	<i>George M.</i>	REGULATEUR DE PRESSION	
		79-11-23	<i>George M.</i>	VALVO LA DI COMANDO GRADUALE	
				DRUCKREGELVENTIL	
		MASS	SCALE	IDENTIFICATION	
		13	14	15	
		1:1		475 018 001 0	
		SIZE	YRL	CODE FOR FUNCTION	
		A1	140	600	
				CODE FOR SHAPE	
				605	
				CODE FOR DOCUMENT	