
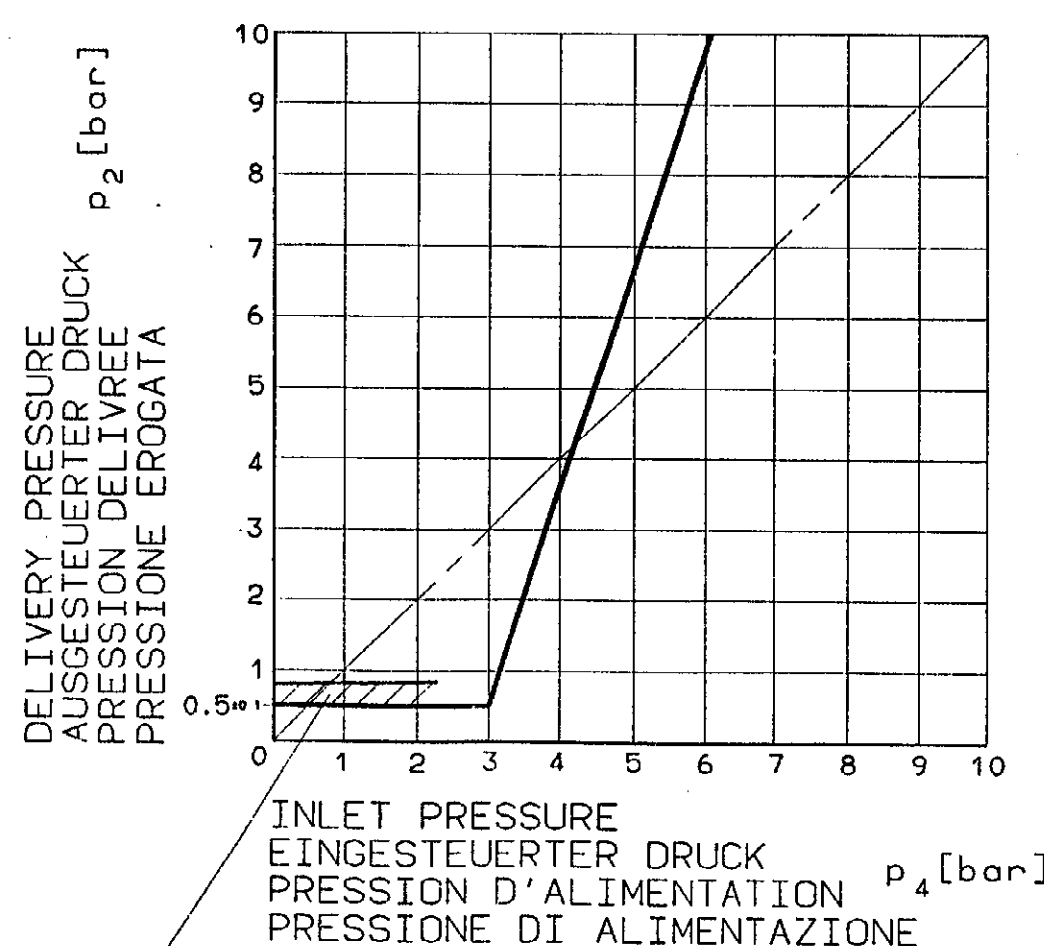
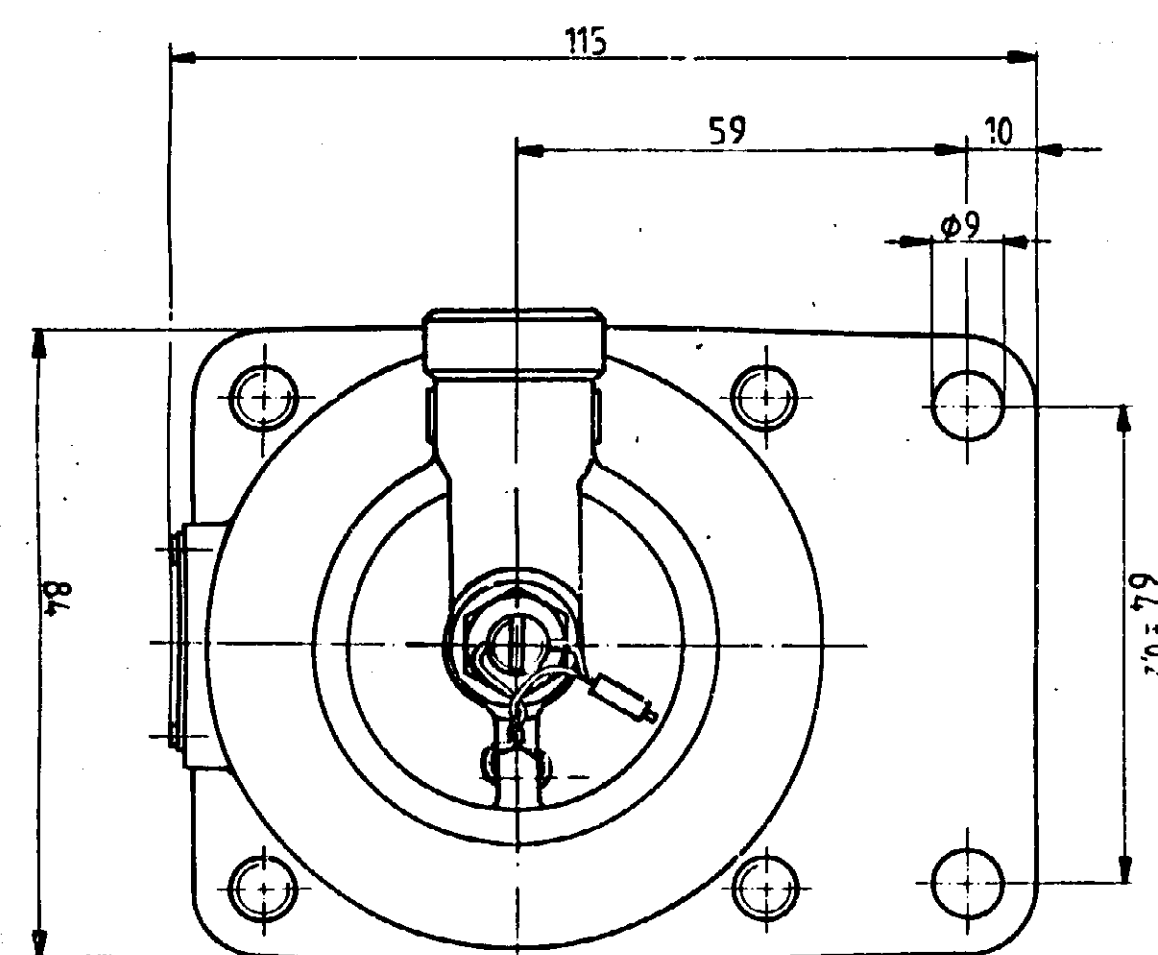
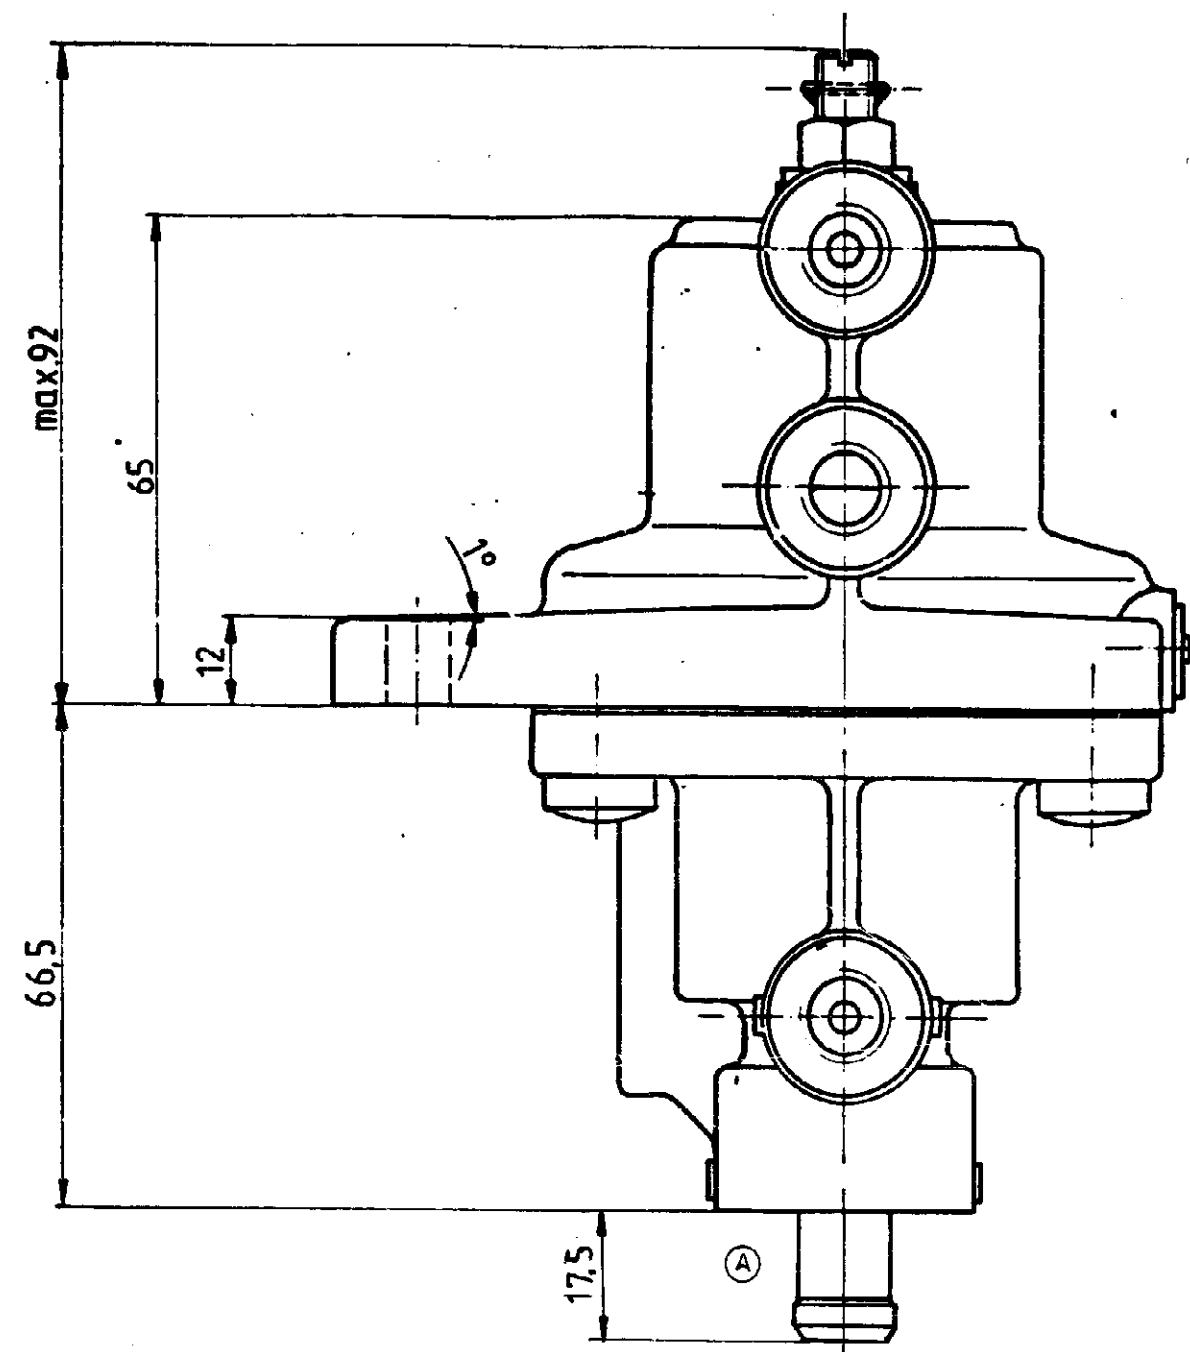


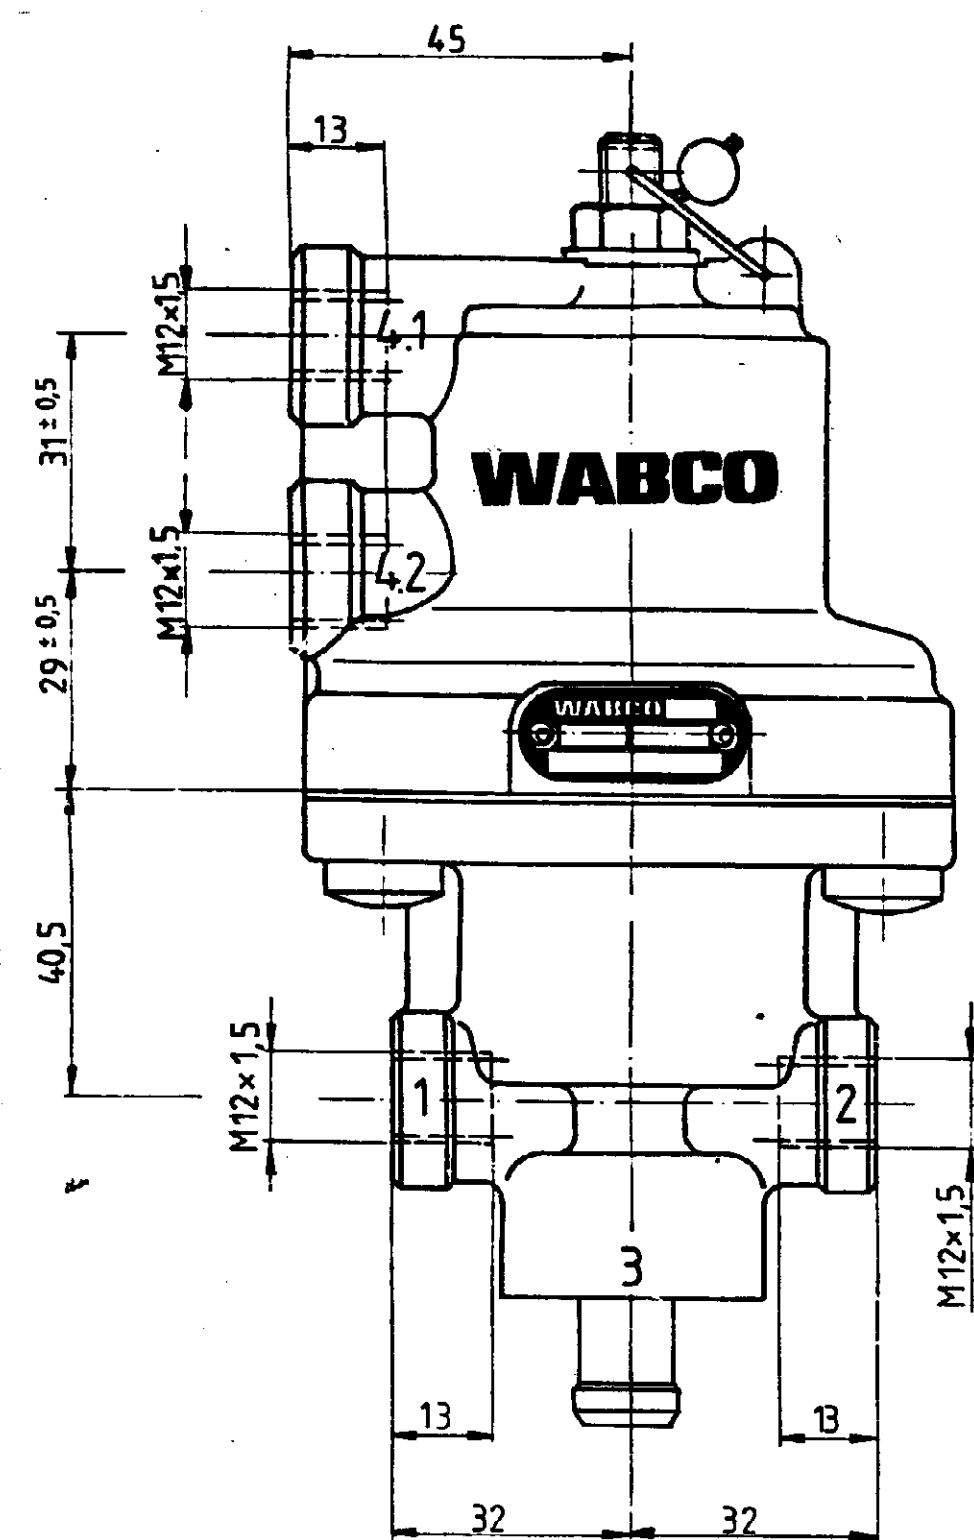

$$p_4 = \frac{p_{4.1} + p_{4.2}}{2}$$

RESIDUAL PRESSURE (DYN.)
RUECKHALTEDRUCK (DYN.)
PRESSION DE RETENUE (DYN.)
PRESSIONE DI RITENUTA (DIN.)

MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA

THERMAL RANGE OF APPLICATION:
THERMISCHER ANWENDUNGSBEREICH:
GAMME D'APPLICATION THERMIQUE: -40° ... +80° C
CAMPO DI APPLICAZIONE TERMICA:

INSTALLATION POSITION AS DRAWN
EINBAULAGE WIE GEZEICHNET
POSITION D'INSTALLATION SUIVANT DESSIN
POSIZIONE DI MONTAGGIO COME DISEGNATO

NOMINAL DIAMETER :
NENNWEITE : 2.27mm²= Ø1.7mm
DIAMETRE NOMINAL :
DIAMETRO NOMINALE :

TORQUE FOR CONNECTIONS:
ANZUGSMOMENT FUER EINSCHRAUBSTUTZEN: M12x1.5: M_{max.} = 21 Nm
COUPLE DE SERRAGE DES RACCORDS:
COPPIA DI SERRAGGIO DEI RACCORDI:

WORKING PRESSURE :
BETRIEBSDRUCK : MAX. p. 10 bar
PRESSION DE SERVICE :
PRESSIONE D'ESERCIZIO :


SUPPLY PRESSURE :
VORRATSDRUCK : MAX. p. 12 bar
PRESSION D'ALIMENTATION :
PRESSIONE DI ALIMENTAZIONE :

1 SUPPLY
VORRAT
ALIMENTATION
ALIMENTAZIONE

2 DELIVERY OF ENERGY
ENERGIEABFLUSS
UTILISATION
MANDATA

3 EXHAUST
ENTLUEFTUNG
ECHAPPEMENT
SCARICO

4.1/4.2 CONTROL PORT
STEUERANSCHLUSS
ORIFICE DE COMMANDE
ORIFIZIO DI COMANDO

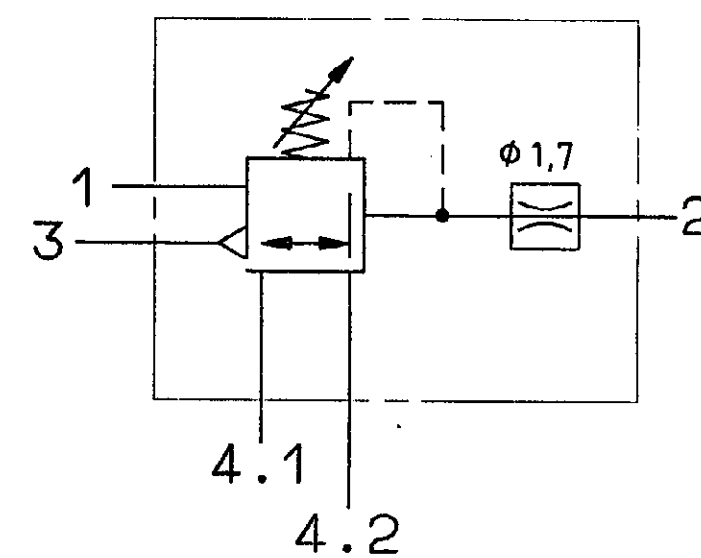

FURTHER TECHNICAL DATA SEE				COPYRIGHT		WABCO	
IDENTIFICATION No.				DATE	SIGNATURE	PRESSURE CONTROL RELAY VALVE DRUCKREGELVENTIL REGULATEUR DE PRESSION VALVOLA DI COMANDO GRADUALE	
CODE FOR DOCUMENT 605 SHEET TO				95-02-27	MAUER		
GENERAL TOLERANCES				95-02-27	CHEVRE		
CLASS				95-02-27	MAUER		
RANGE OF NOMINAL DIMENSIONS (± mm)				STANDARDIZATION		PRODUCT IDENTIFICATION No.	
I				MASS		475 018 010 0	
II				SCALE		605	
III				SIZE		1/1	
TAPPED HOLES ACC. ISO 4039 / JED-152				DATE		REPLACEMENT FOR	
TOLERANCE CLASS APPLIED CROSSMARKED				REV			