
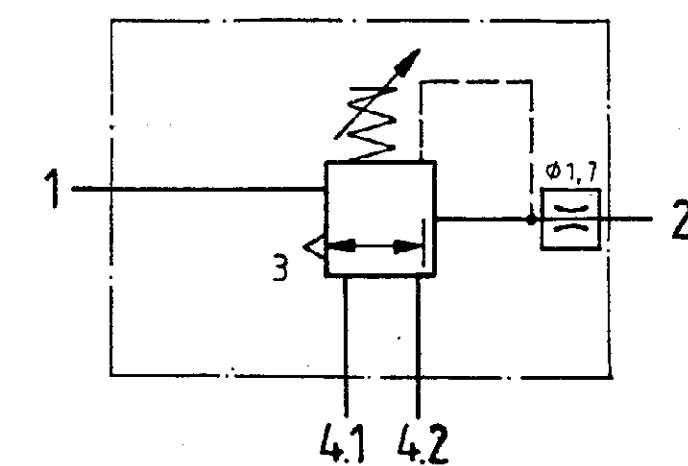
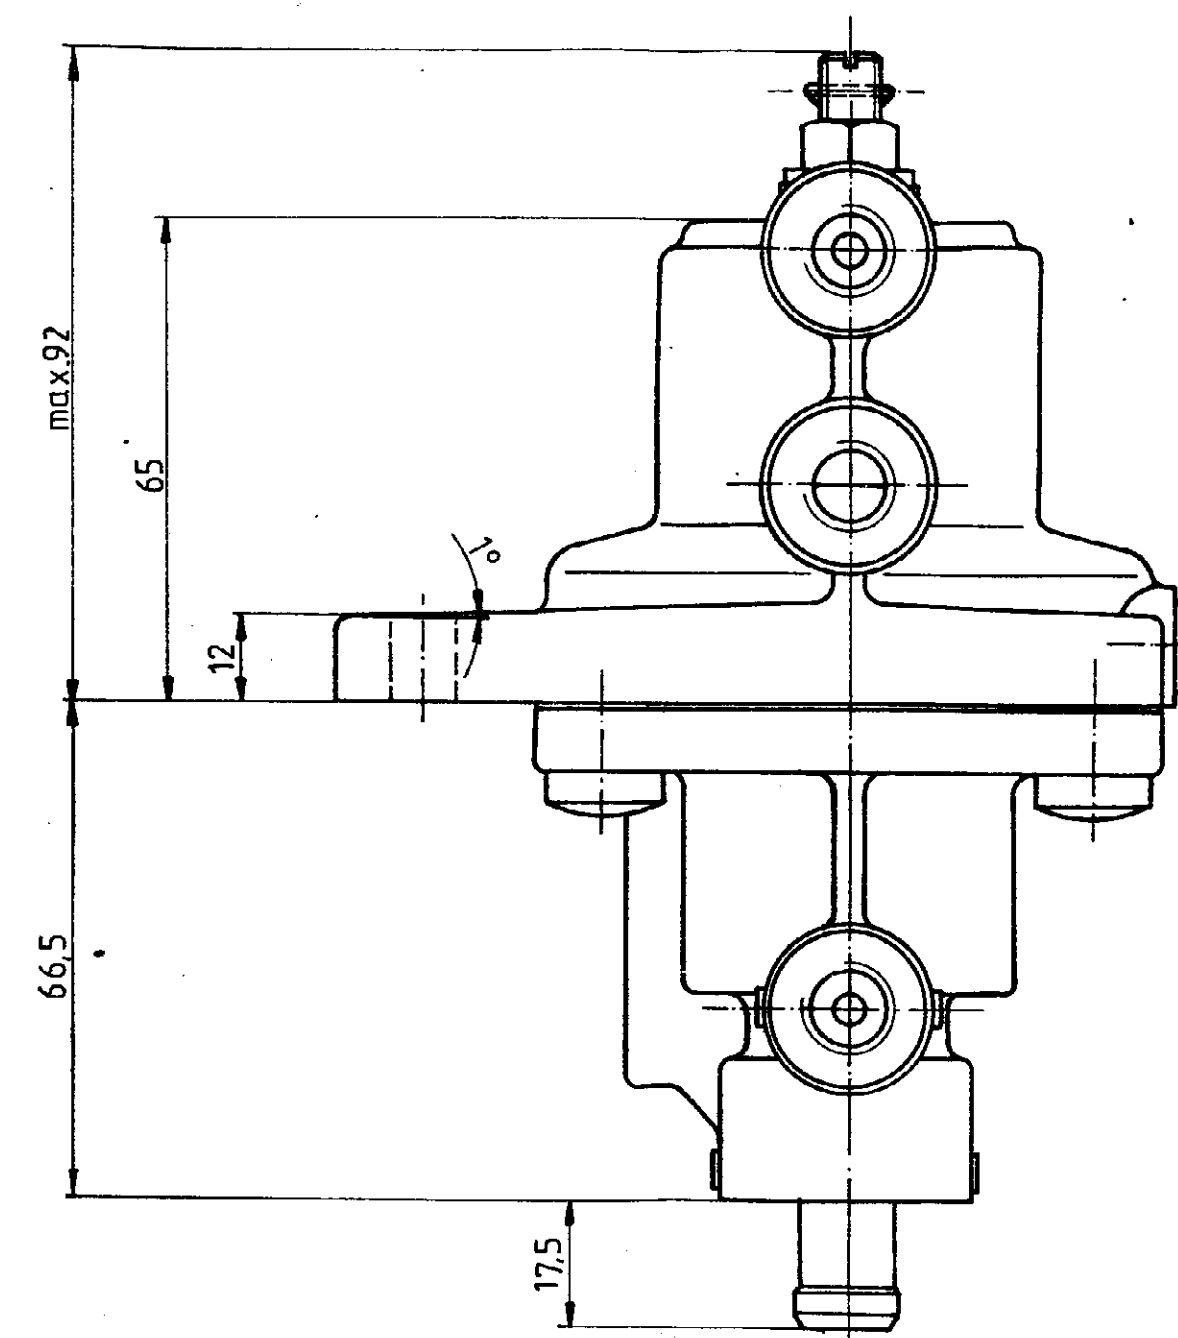


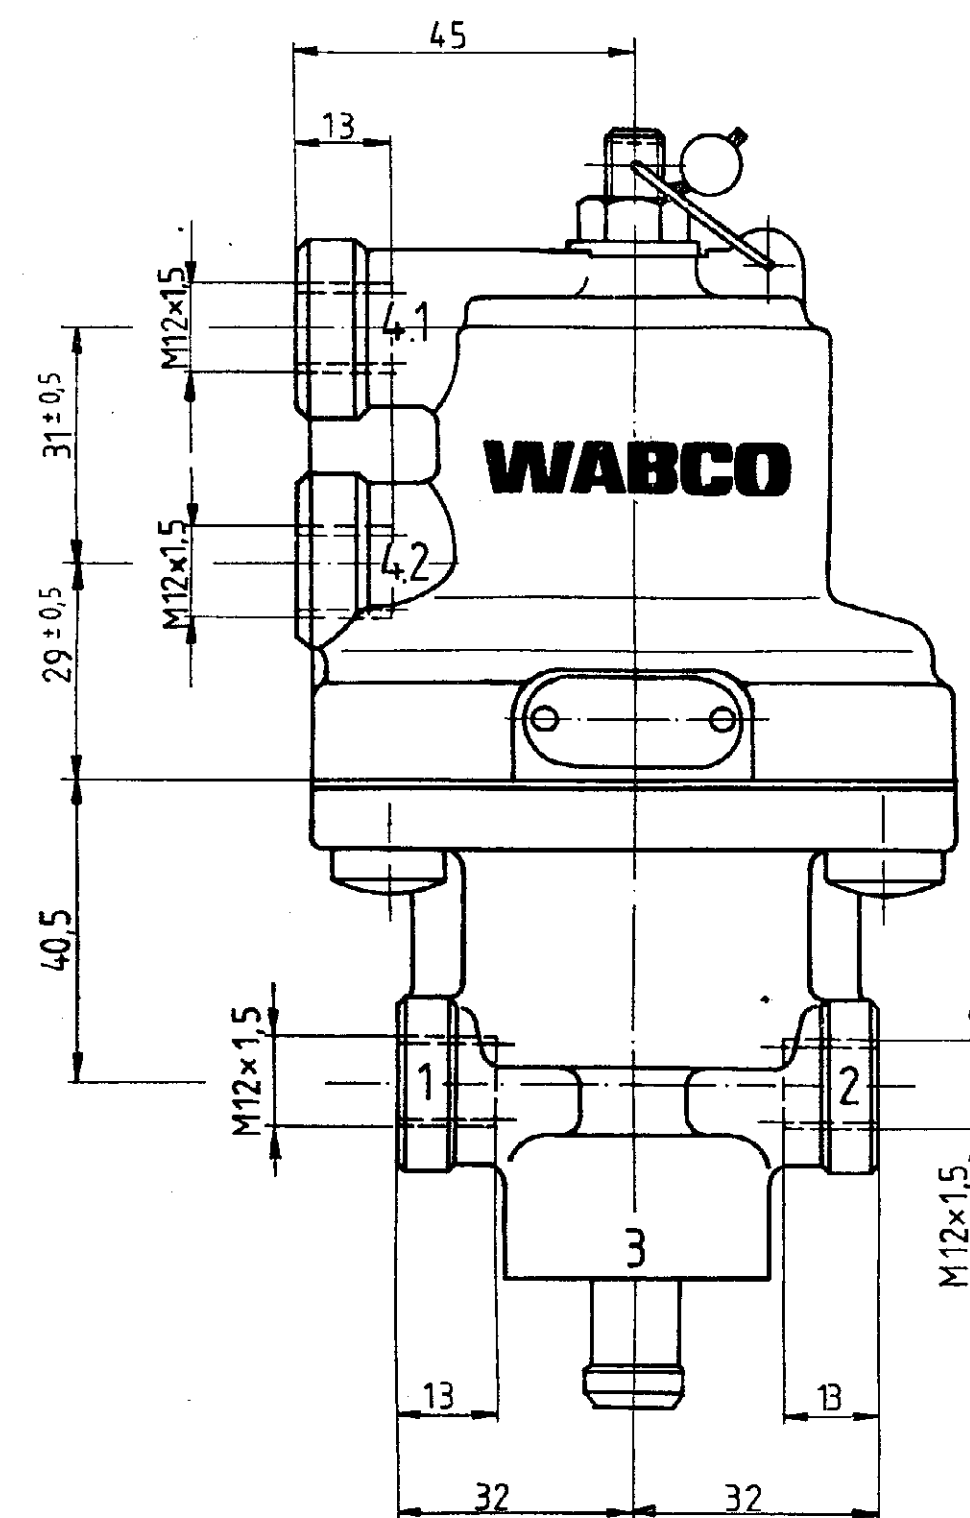

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
GAMME D'APPLICATION THERMIQUE
CAMPO DI APPLICAZIONE TERMICA

-40°C ... +80°C

WORKING PRESSURE
BETRIEBSDRUCK
PRESSION D'UTILISATION
PRESSIONE DI ESERCIZIO

p_e max. 10 bar

MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA

INSTALLATION POSITION AS DRAWN
EINBAULAGE WIE GEZEICHNET
POSITION D'INSTALLATION SUIVANT DESSIN
POSIZIONE DI MONTAGGIO COME DISEGNATO

NOMINAL DIAMETER
NENNWEITE
DIAMETRE NOMINAL
DIAMETRO NOMIALE



$2,27 \text{ mm}^2 = \phi 1,7 \text{ mm}$

1 INLET
EINGANG
ALIMENTATION
ALIMENTAZIONE

2 OUTLET
AUSGANG
SORTIE
USCITA

3 EXHAUST
ENTLUEFTUNG
ECHAPPEMENT
SCARICO

41/42 CONTROL PORT
STEUERANSCHLUSS
ORIFICE DE COMMANDE
ORIFIZIO DI COMANDO

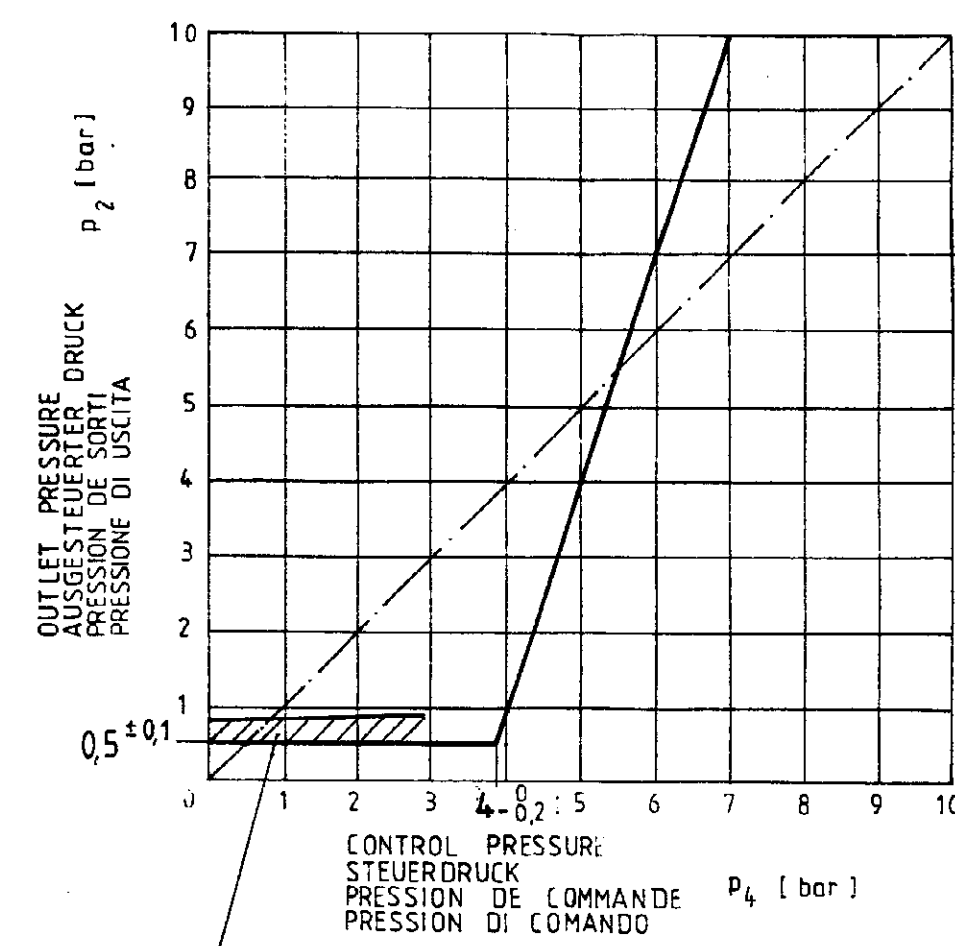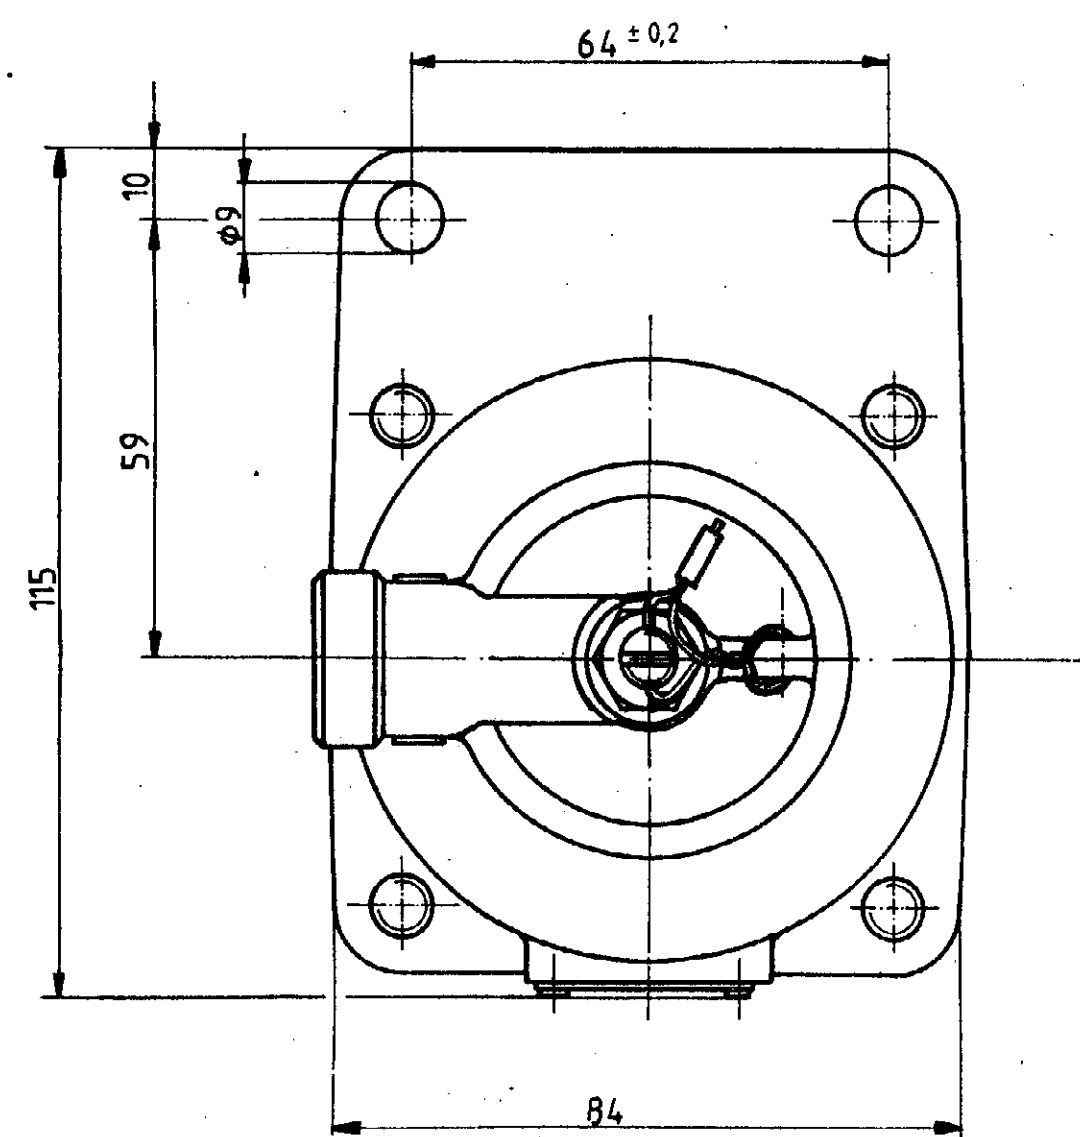

$$p_4 = \frac{p_{41} + p_{42}}{2}$$

RESIDUAL PRESSURE (DYN.)
RUECKHALTEDRUCK (DYN.)
PRESSION DE RETENUE (DYN.)
PRESSIONE DI RETENUTA (DINAMICO)

FURTHER TECHNICAL DATA SEE				L	COPYRIGHT		WABCO	
IDENTIFICATION No.				K	DATE		SIGNATURE	
CODE FOR DOCUMENT: 605 SHEET: TO				J	95-05-29		URBAN	
GENERAL TOLERANCES				G	95-05-22		CHECKED	
RANGE OF NOMINAL DIMENSIONS (± mm)				H	STANDARDIZATION		OK	
CLASS	1)	≤ 50	> 50 ≤ 180	F	MASS		SCALE	
I	0.5	1	1.5	D	1.03	kg	1:1	
II	1	2	3	C	SIZE		TRI	
III	2	3.5	5	B	A 1	140		
TAPPED HOLES ACC. ISO 4039 / JED-152				A	CODE F. PROD. GROUP		CODE FOR SHAPE	
1) TOLERANCE CLASS APPLIED CROSSMARKED				DEN-NO	REV.	DATE	REPLACEMENT FOR	

WABCO

PRESSURE CONTROL RELAY VALVE
DRUCKREGELVENTIL
REGULATEUR DE PRESSION
VALVOLA DI COMANDO GRADUALE

PRODUCT IDENTIFICATION NO.
475 018 011 0

CODE FOR DOCUMENT SHEET
605 1/1

REPLACEMENT FOR