
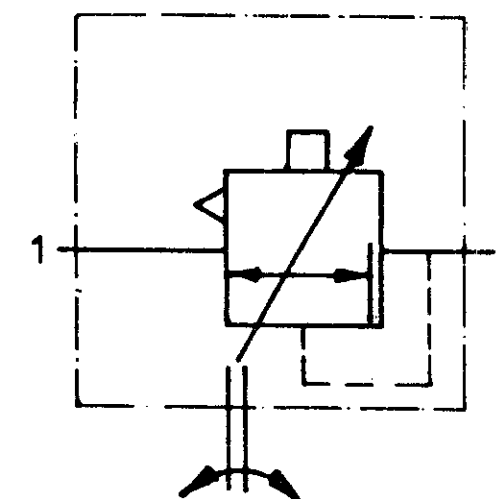
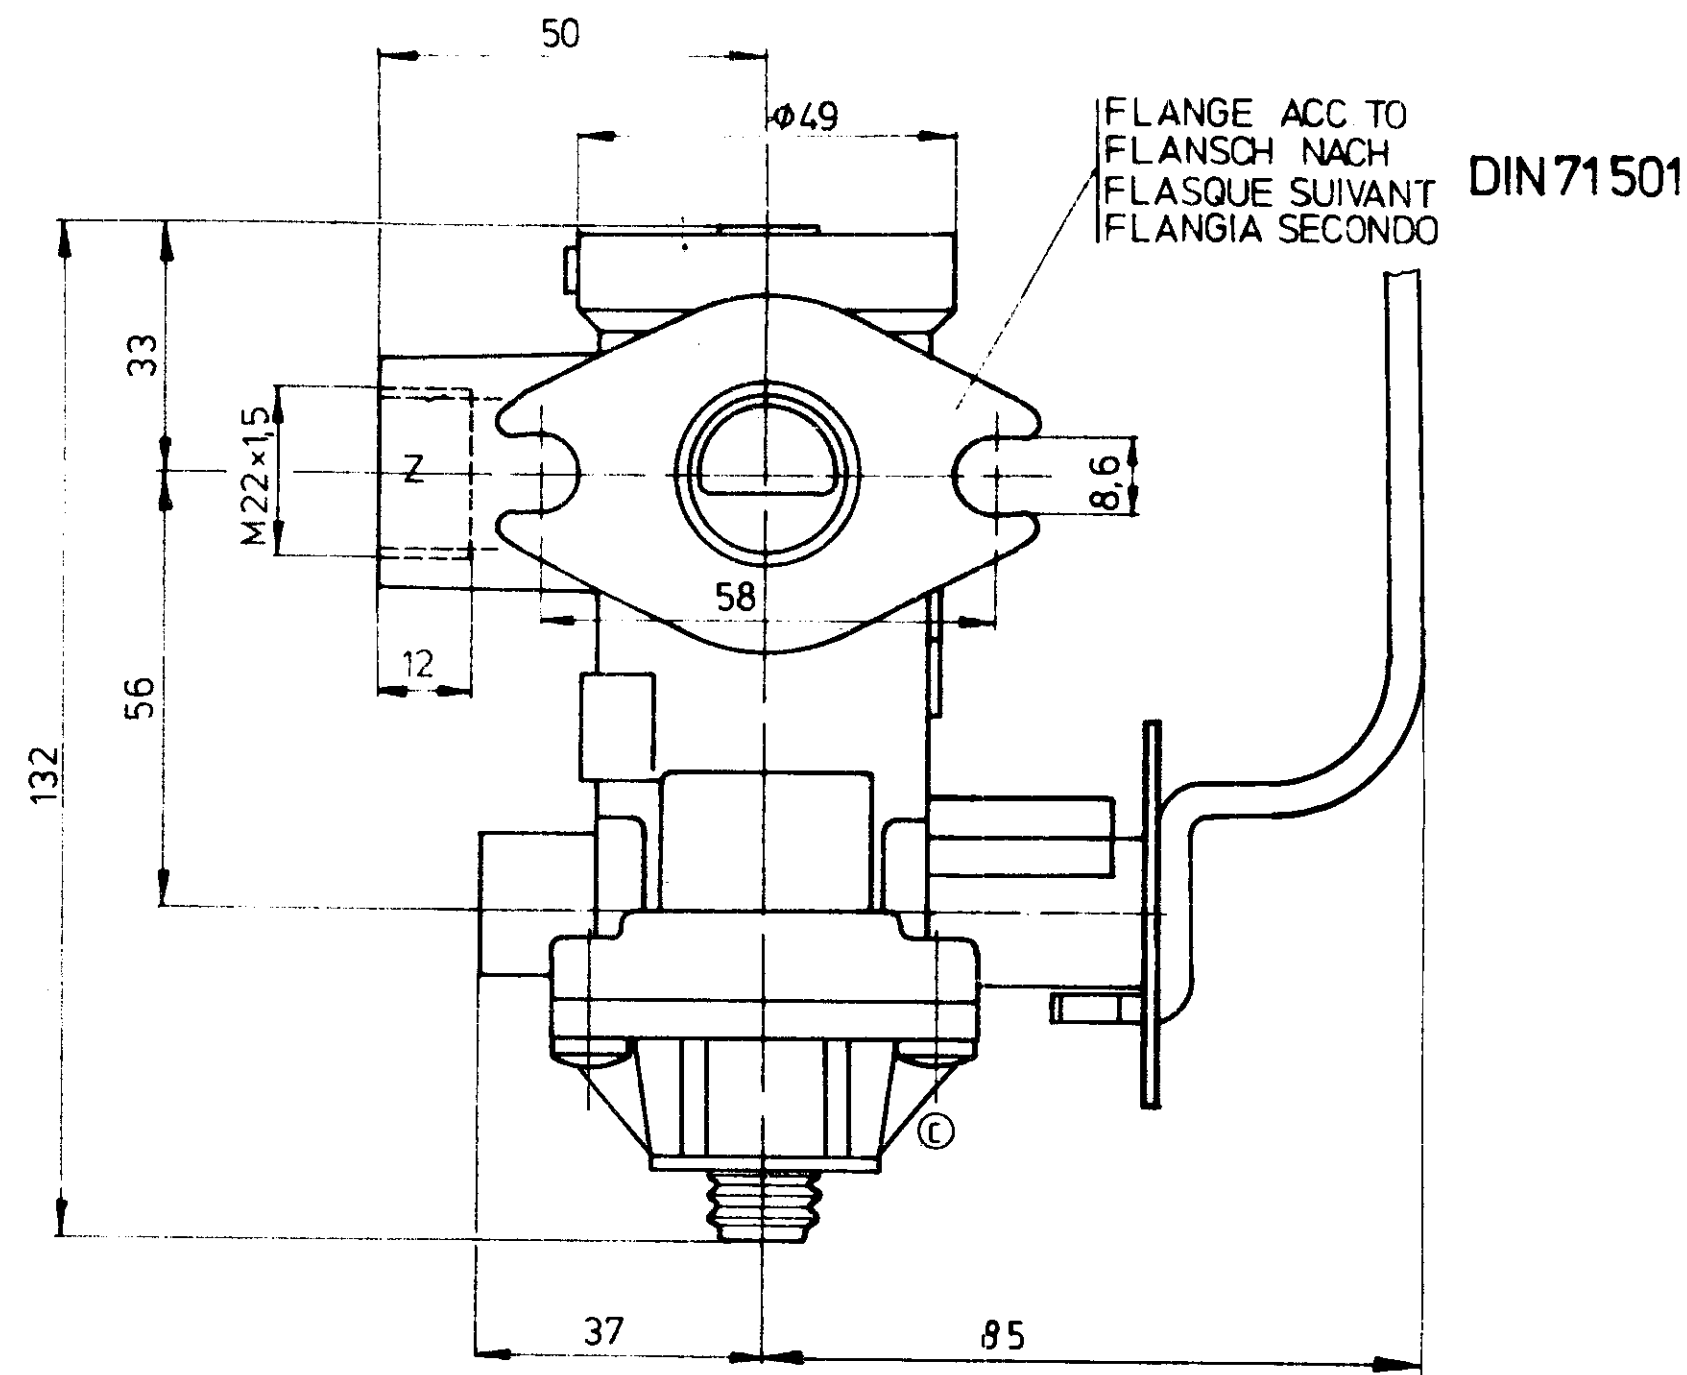


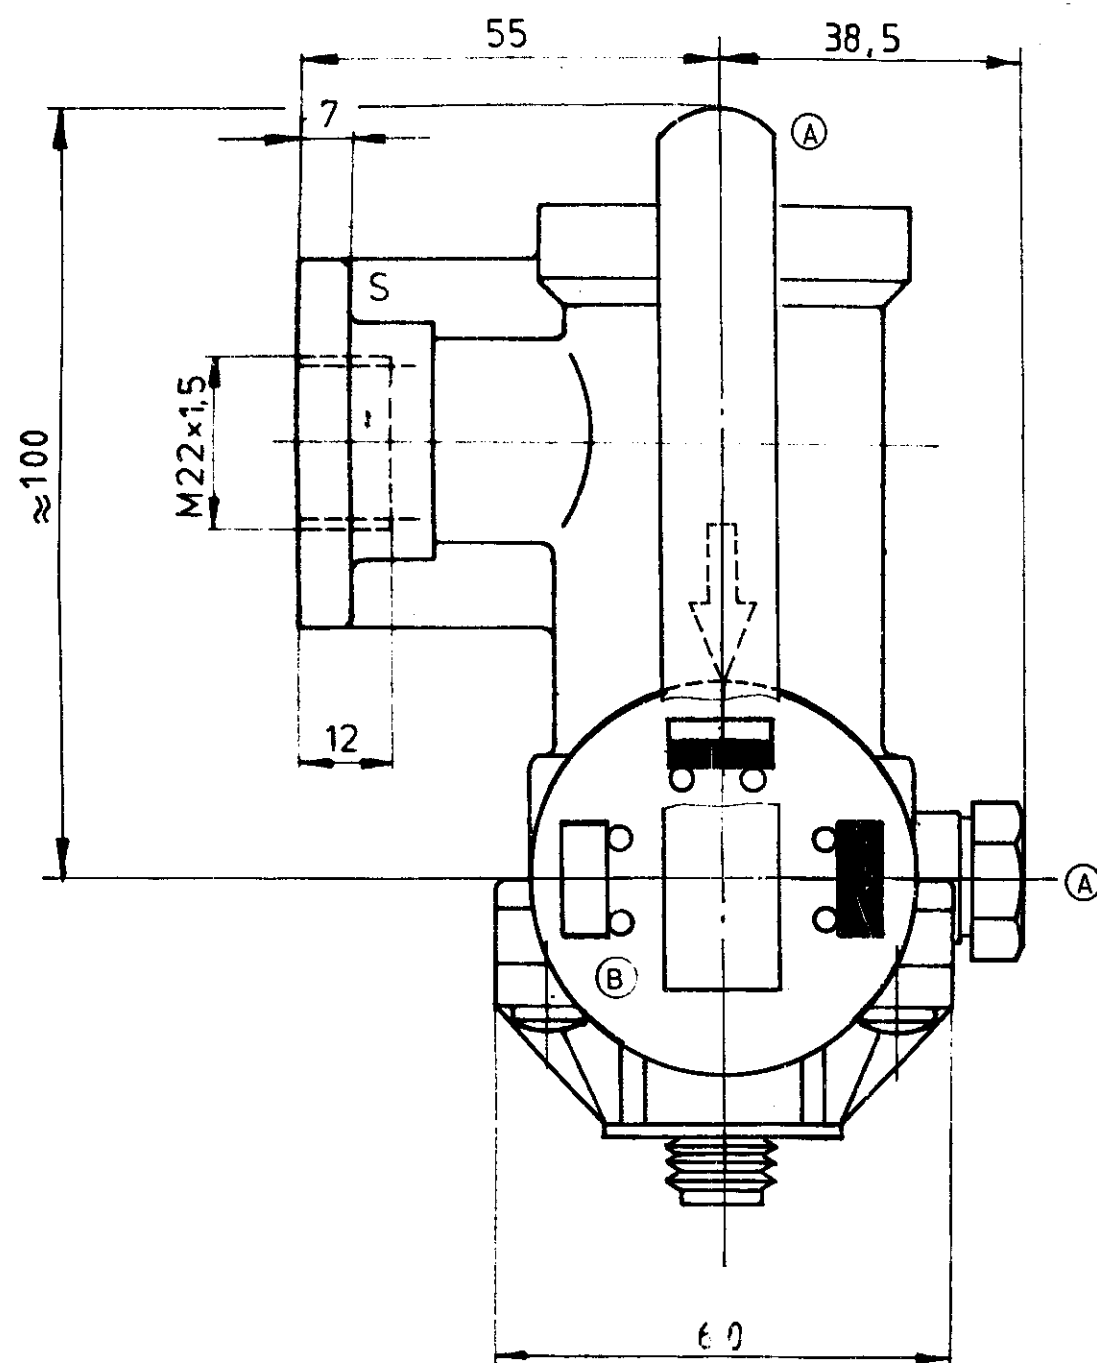

WORKING PRESSURE:
BETRIEBSDRUCK: MAX. 10 bar
PRESSION DE SERVICE:
PRESSIONE D'ESERCIZIO:
THERMAL RANGE OF APPLICATION:
THERMISCHER ANWENDUNGSBEREICH: -40°C ... +80°C
GAMME D'APPLICATION:
CAMPO TERMICO DI UTILIZZAZIONE:

MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA

1 = S = INLET
EINGANG
ADMISSION
AMMISSIONE

2 = Z = OUTLET
AUSGANG
SORTIE
USCITA

	RANGE OF ADJUSTMENT: EINSTELLBEREICH: 1,4...2,8 bar ZONE DE REGLAGE: ZONA DI REGOLAZIONE:	ADJUSTED TO: EINGESTELLT AUF: 2,1 ⁰ -0,2 bar REGLE A: REGOLATO A:
	RANGE OF ADJUSTMENT: EINSTELLBEREICH: 3,4...4,3 bar ZONE DE REGLAGE: ZONA DI REGOLAZIONE:	ADJUSTED TO: EINGESTELLT AUF: 4,0 ⁰ -0,2 bar REGLE A: REGOLATO A:
	NOMINAL PASSAGE: FREIER DURCHGANG: DIAMETRE NOMINAL: DIAMETRO NOMINALE:	

GENERAL TOLERANCES									
CLASS	RANGE OF NOMINAL DIMENSIONS (± mm)					FORCE, POWER, PRESSURE ETC.			
	1)	≤ 50	≤ 180	≤ 400	> 400	(± %)	1)	(± %)	2)
I		0,5	1	1,5	2	5		5	
II		1	2	3	4	10		10	
III	X	2	3,5	5	6,5	20		20	

1) CHECK OFF WHERE APPLICABLE

DATE	SIGNATURE	WABCO WIELAND EMPTY-LOAD VALVE ROBINET VIDE-CHARGE VALVOLA DI VUOTO-CARICO BREMSKRAFTREGLER
78-09-07	Chippett	
78-09-07	Dieter	
78-09-07	Dieter	
99041 1x D 99.02.19	23873 1 C 81-02-20	STANDARD CATALOG
21694 1 C 79-10-12	21602 2 A 79-01-15	MASS 0,65
SCALE 1:1	SIZE A2	210 D
IDENTIFICATION CODE		475 604 013 0
CODE FOR FUNCTION		605

All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.
 Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.