

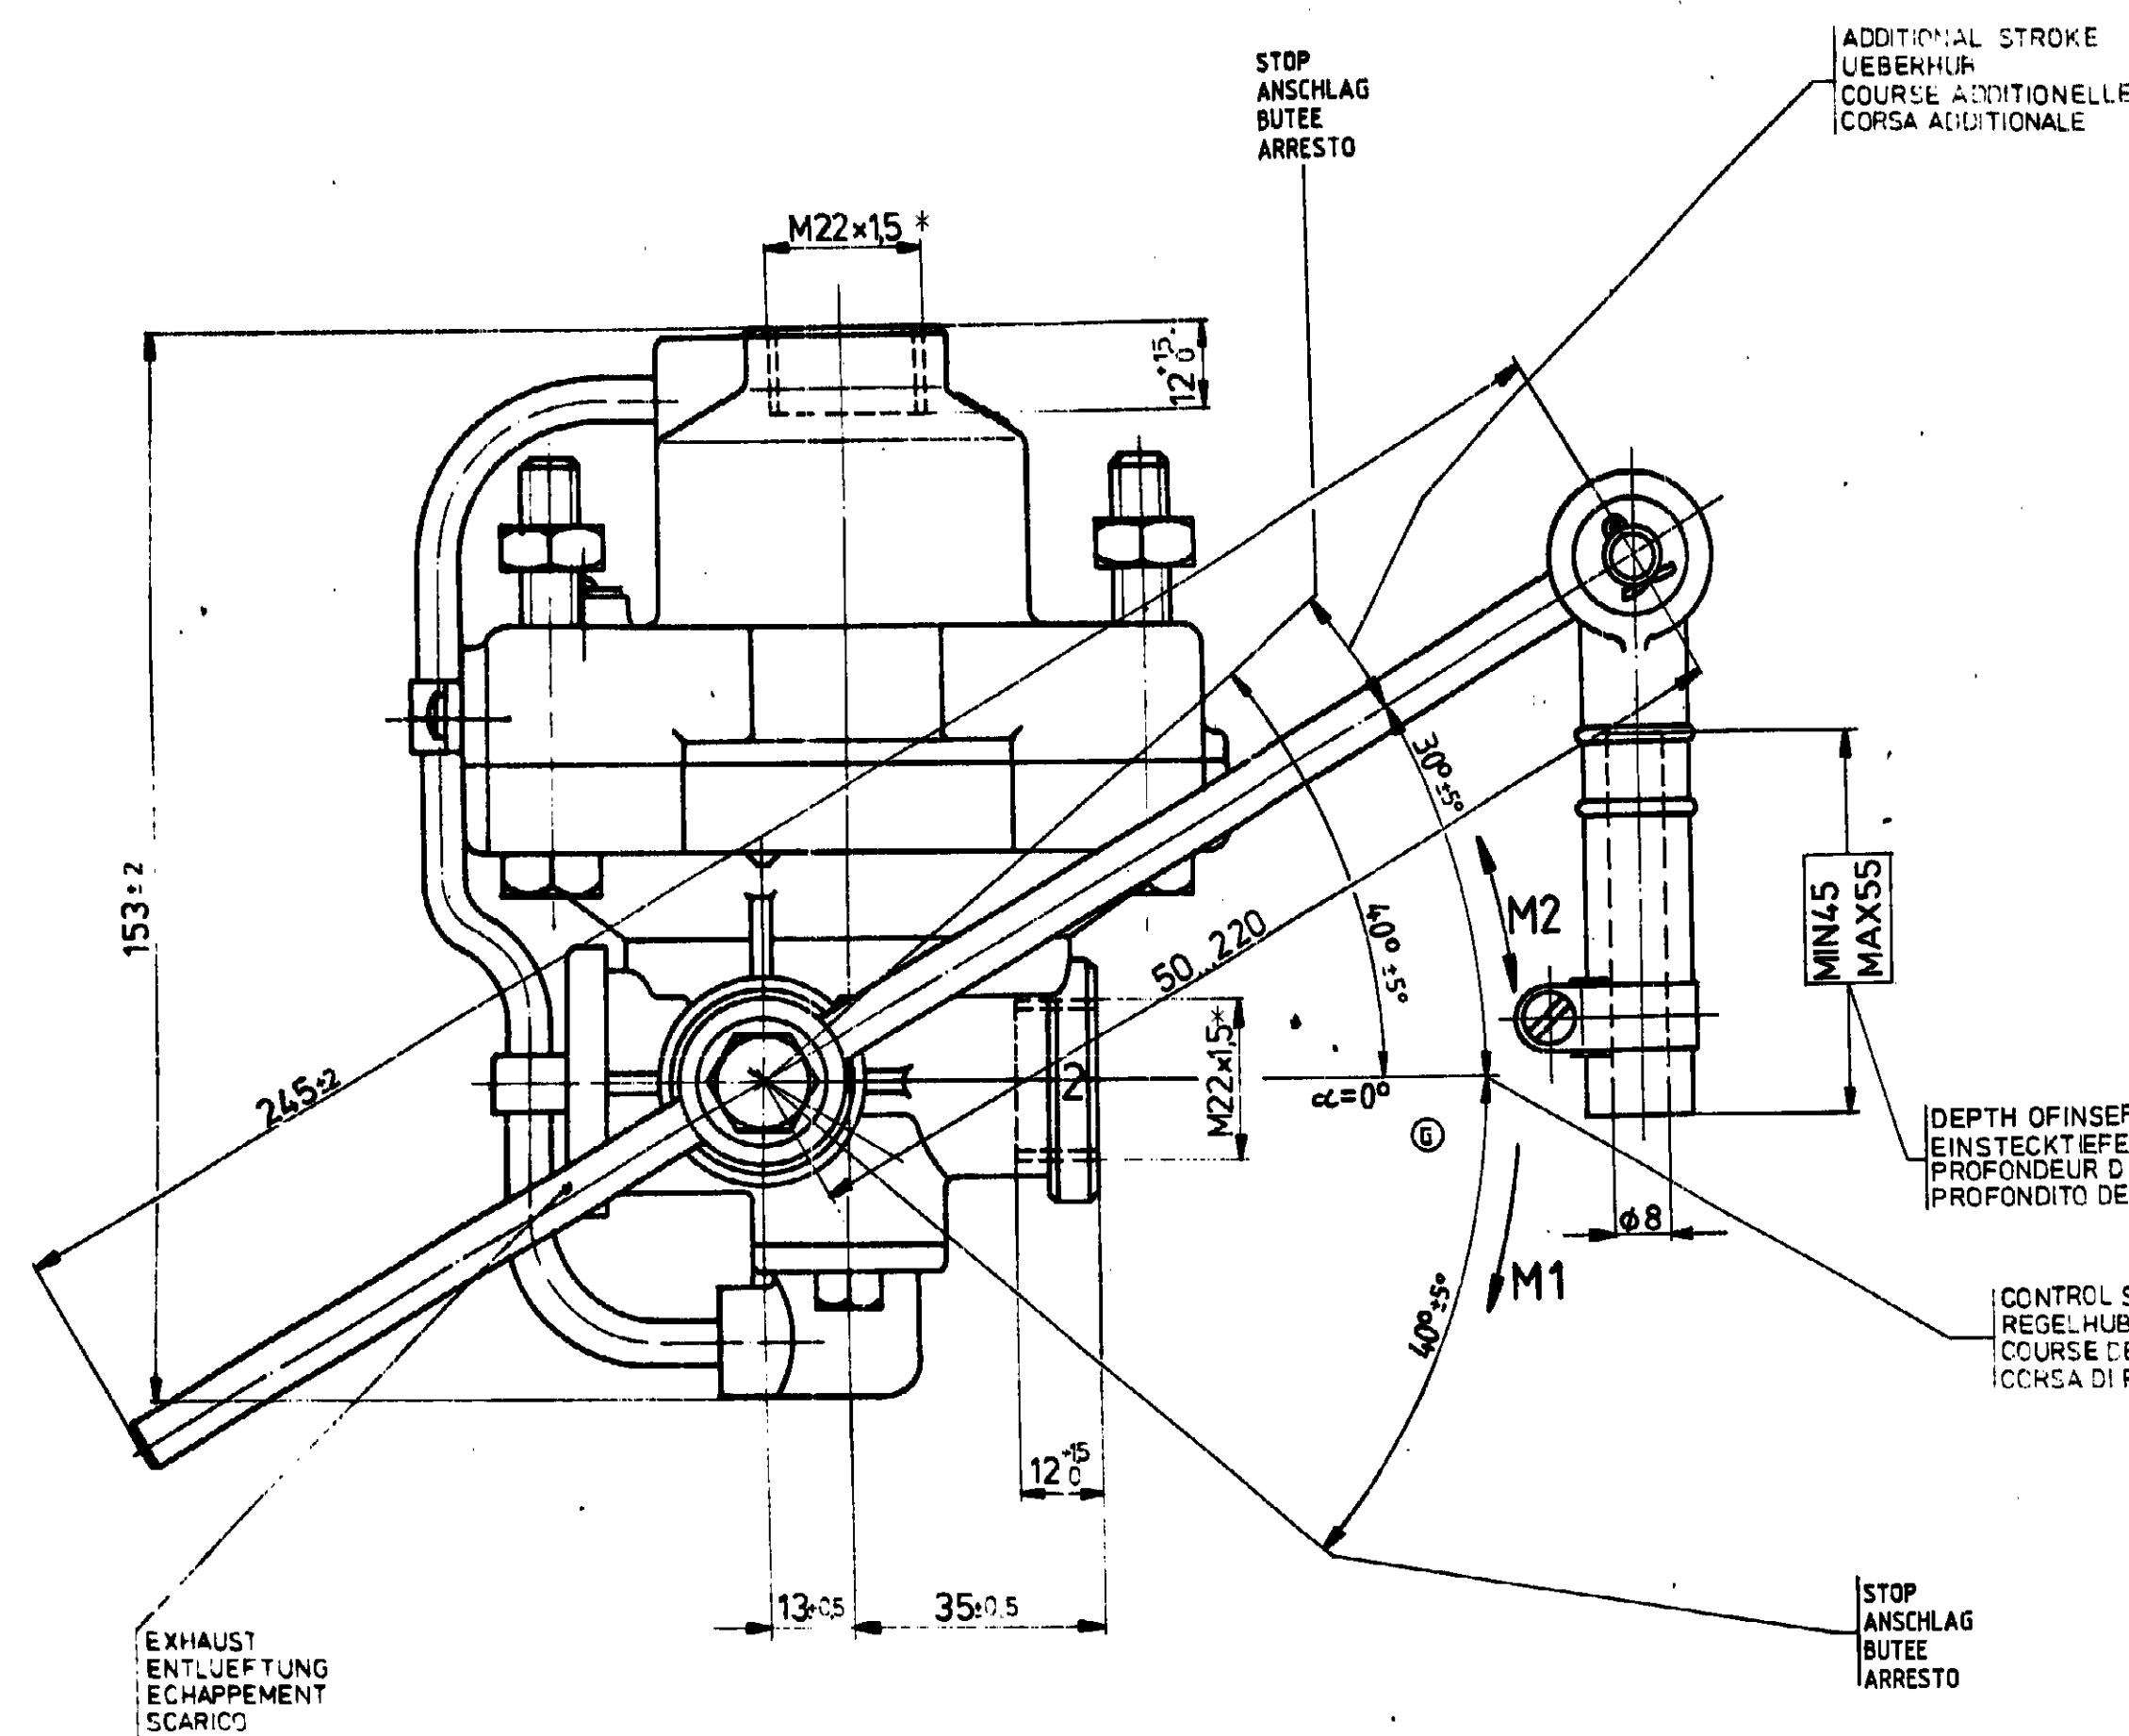
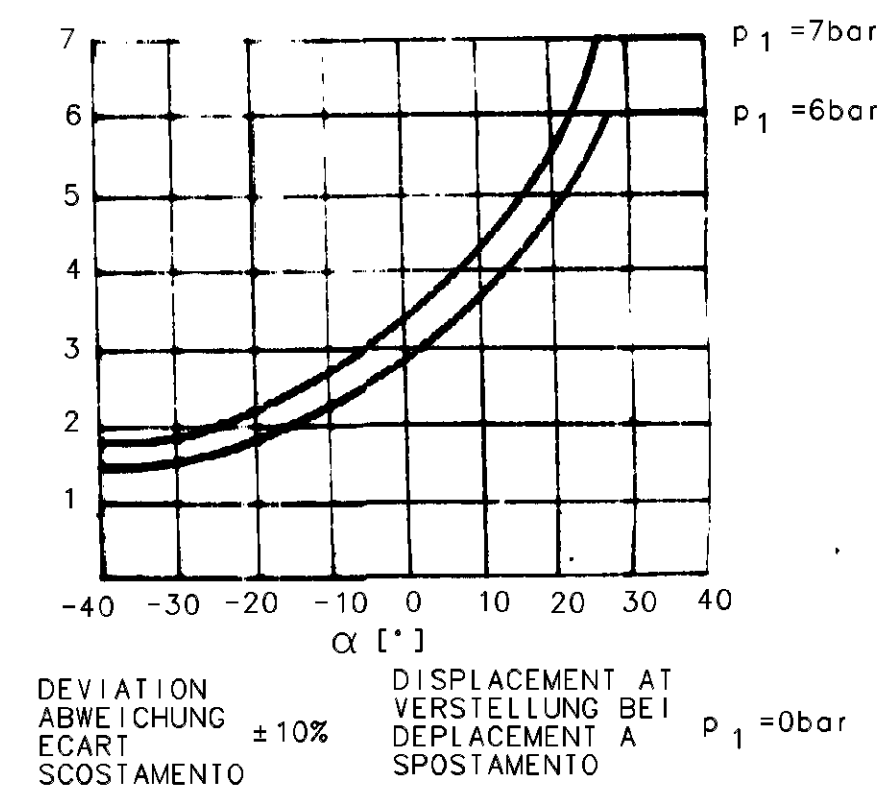
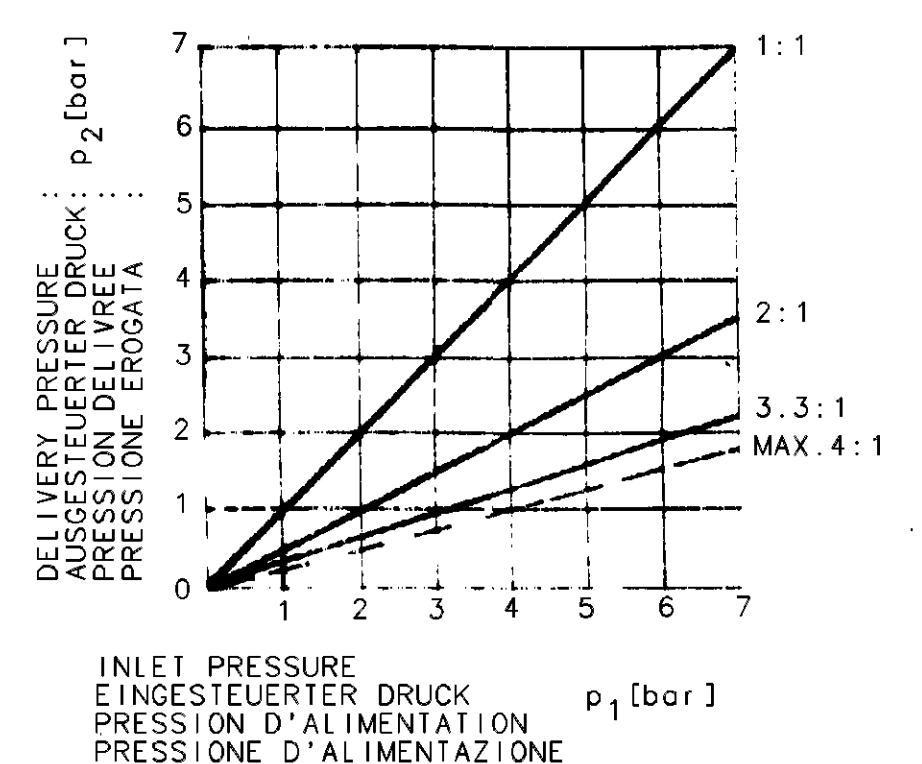
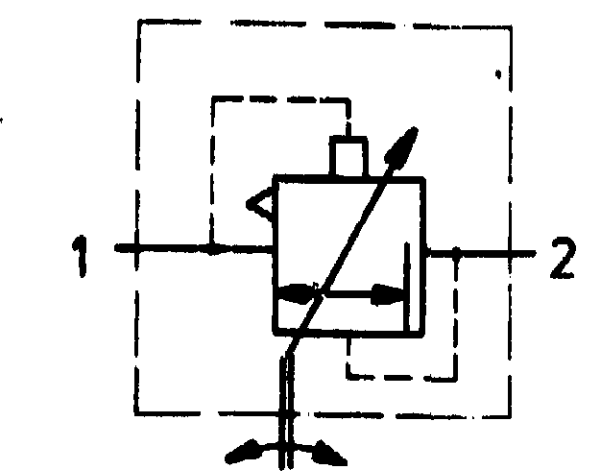


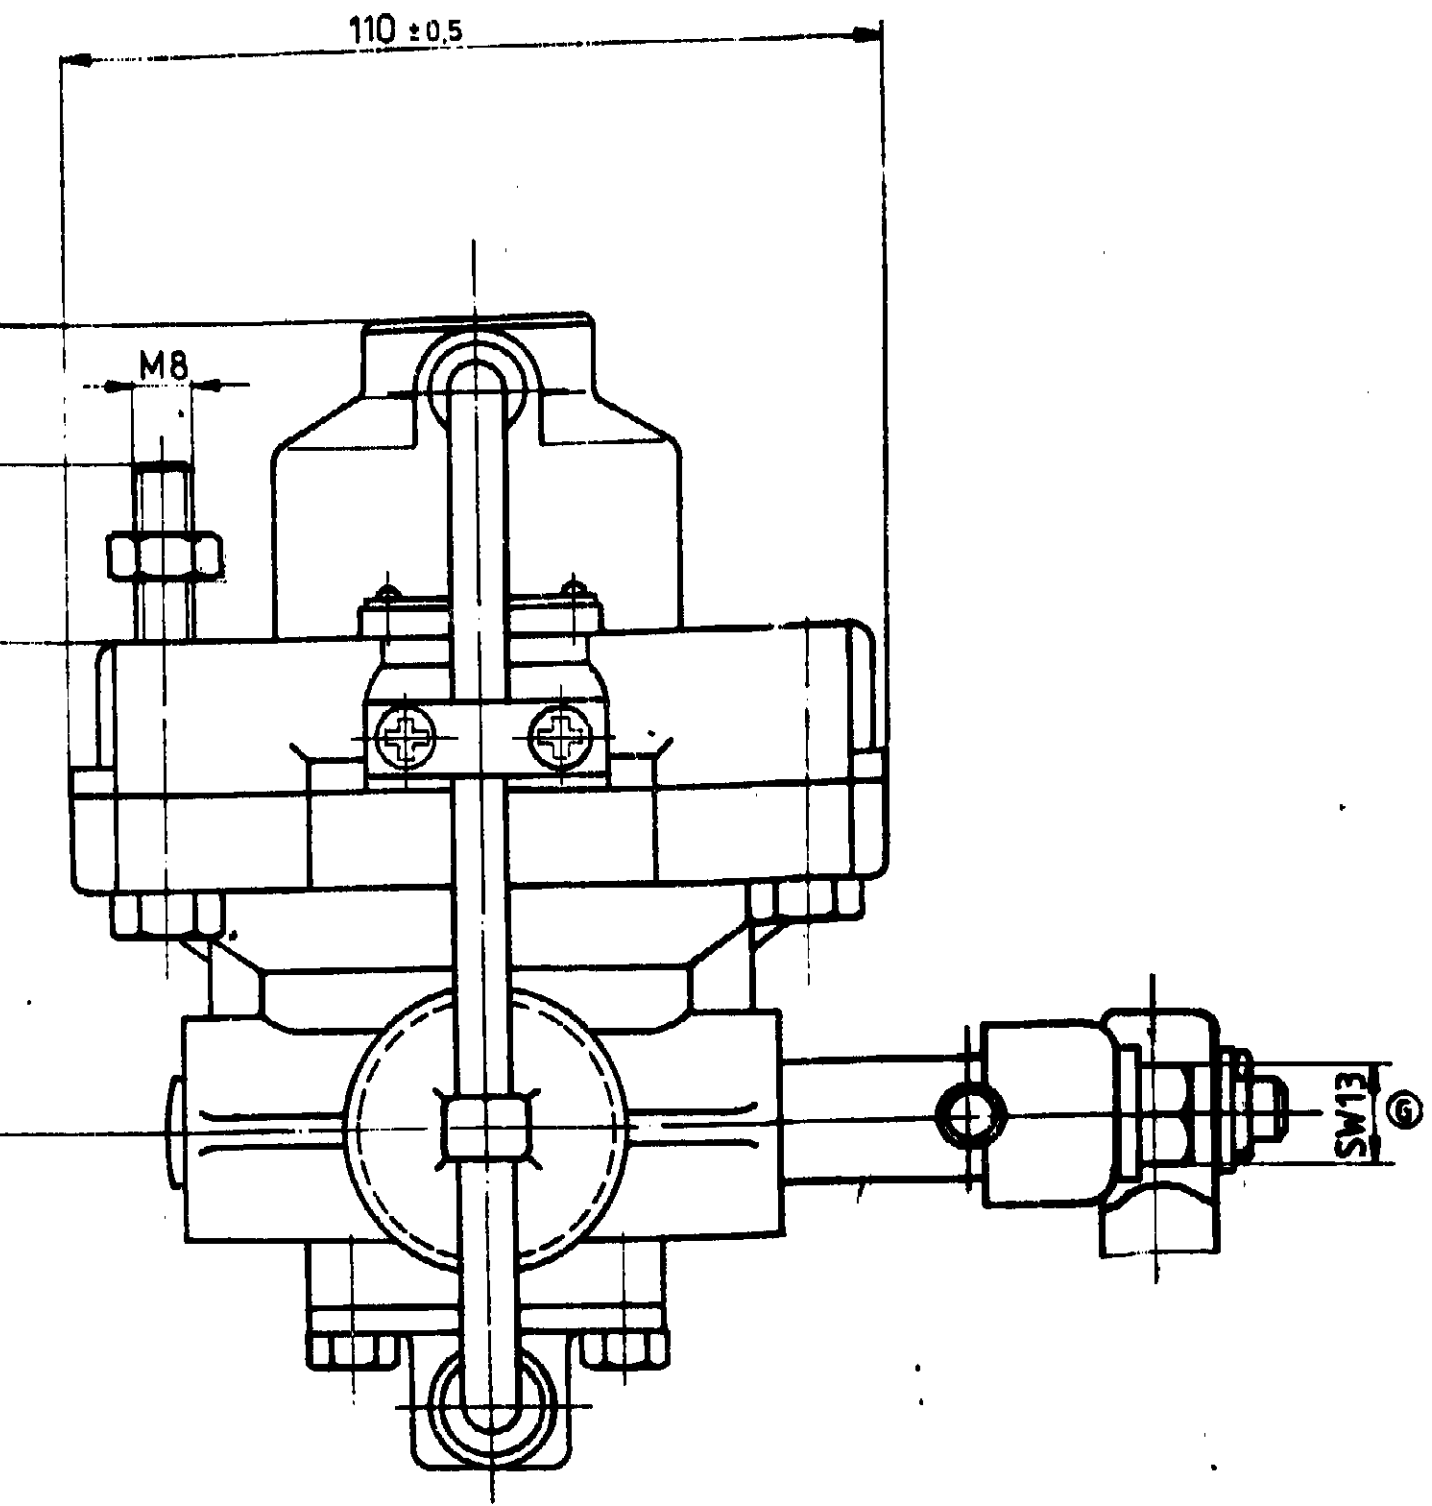

ACCORDING TO JED-152
ENTSPRECHEND JED-152
CONFORME A JED-152
CONFORME A JED-152

TORQUE FOR CONNECTIONS:
ANZUGSMOMENT FUER EINSCHRAUBSTUTZEN:
COUPLE DE SERRAGE DES RACCORDS: M22x1.5: M_{max} = 53 Nm
COPPIA DI SERRAGGIO DEI RACCORDI:

- 1= SUPPLY OF ENERGY
ENERGIEZUFUSS
ALIMENTATION D'ENERGIE
ALIMENTAZIONE DI ENERGIA
- 2= DELIVERY OF ENERGY
ENERGIEABFUSS
UTILISATION D'ENERGIE
UTILIZZAZIONE DI ENERGIA
- WORKING PRESSURE
BETRIEBSDRUCK
PRESSION D'UTILISATION
PRESSIONE DI ESERCIZIO
MAX. pe = 10 bar
- THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
GAMME D'APPLICATION THERMIQUE
CAMPO DI APPLICAZIONE TERMICA
-40°C ... +80°C
- MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA
- M1= NECESSARY DISPLACING MOMENT:
ERFORDERLICHES VERSTELLMOMENT:
COUPLE NECESSAIRE AU MOUVEMENT:
COPPIA DI REGOLAZIONE NECESSARIA:
2 Nm
- M2= ADMISSIBLE DISPLACING MOMENT:
ZULAESSIGES VERSTELLMOMENT:
ADMISSIBLE MAXI AU MOUVEMENT:
COPPIA DI REGOLAZIONE AMMESSA:
15 Nm

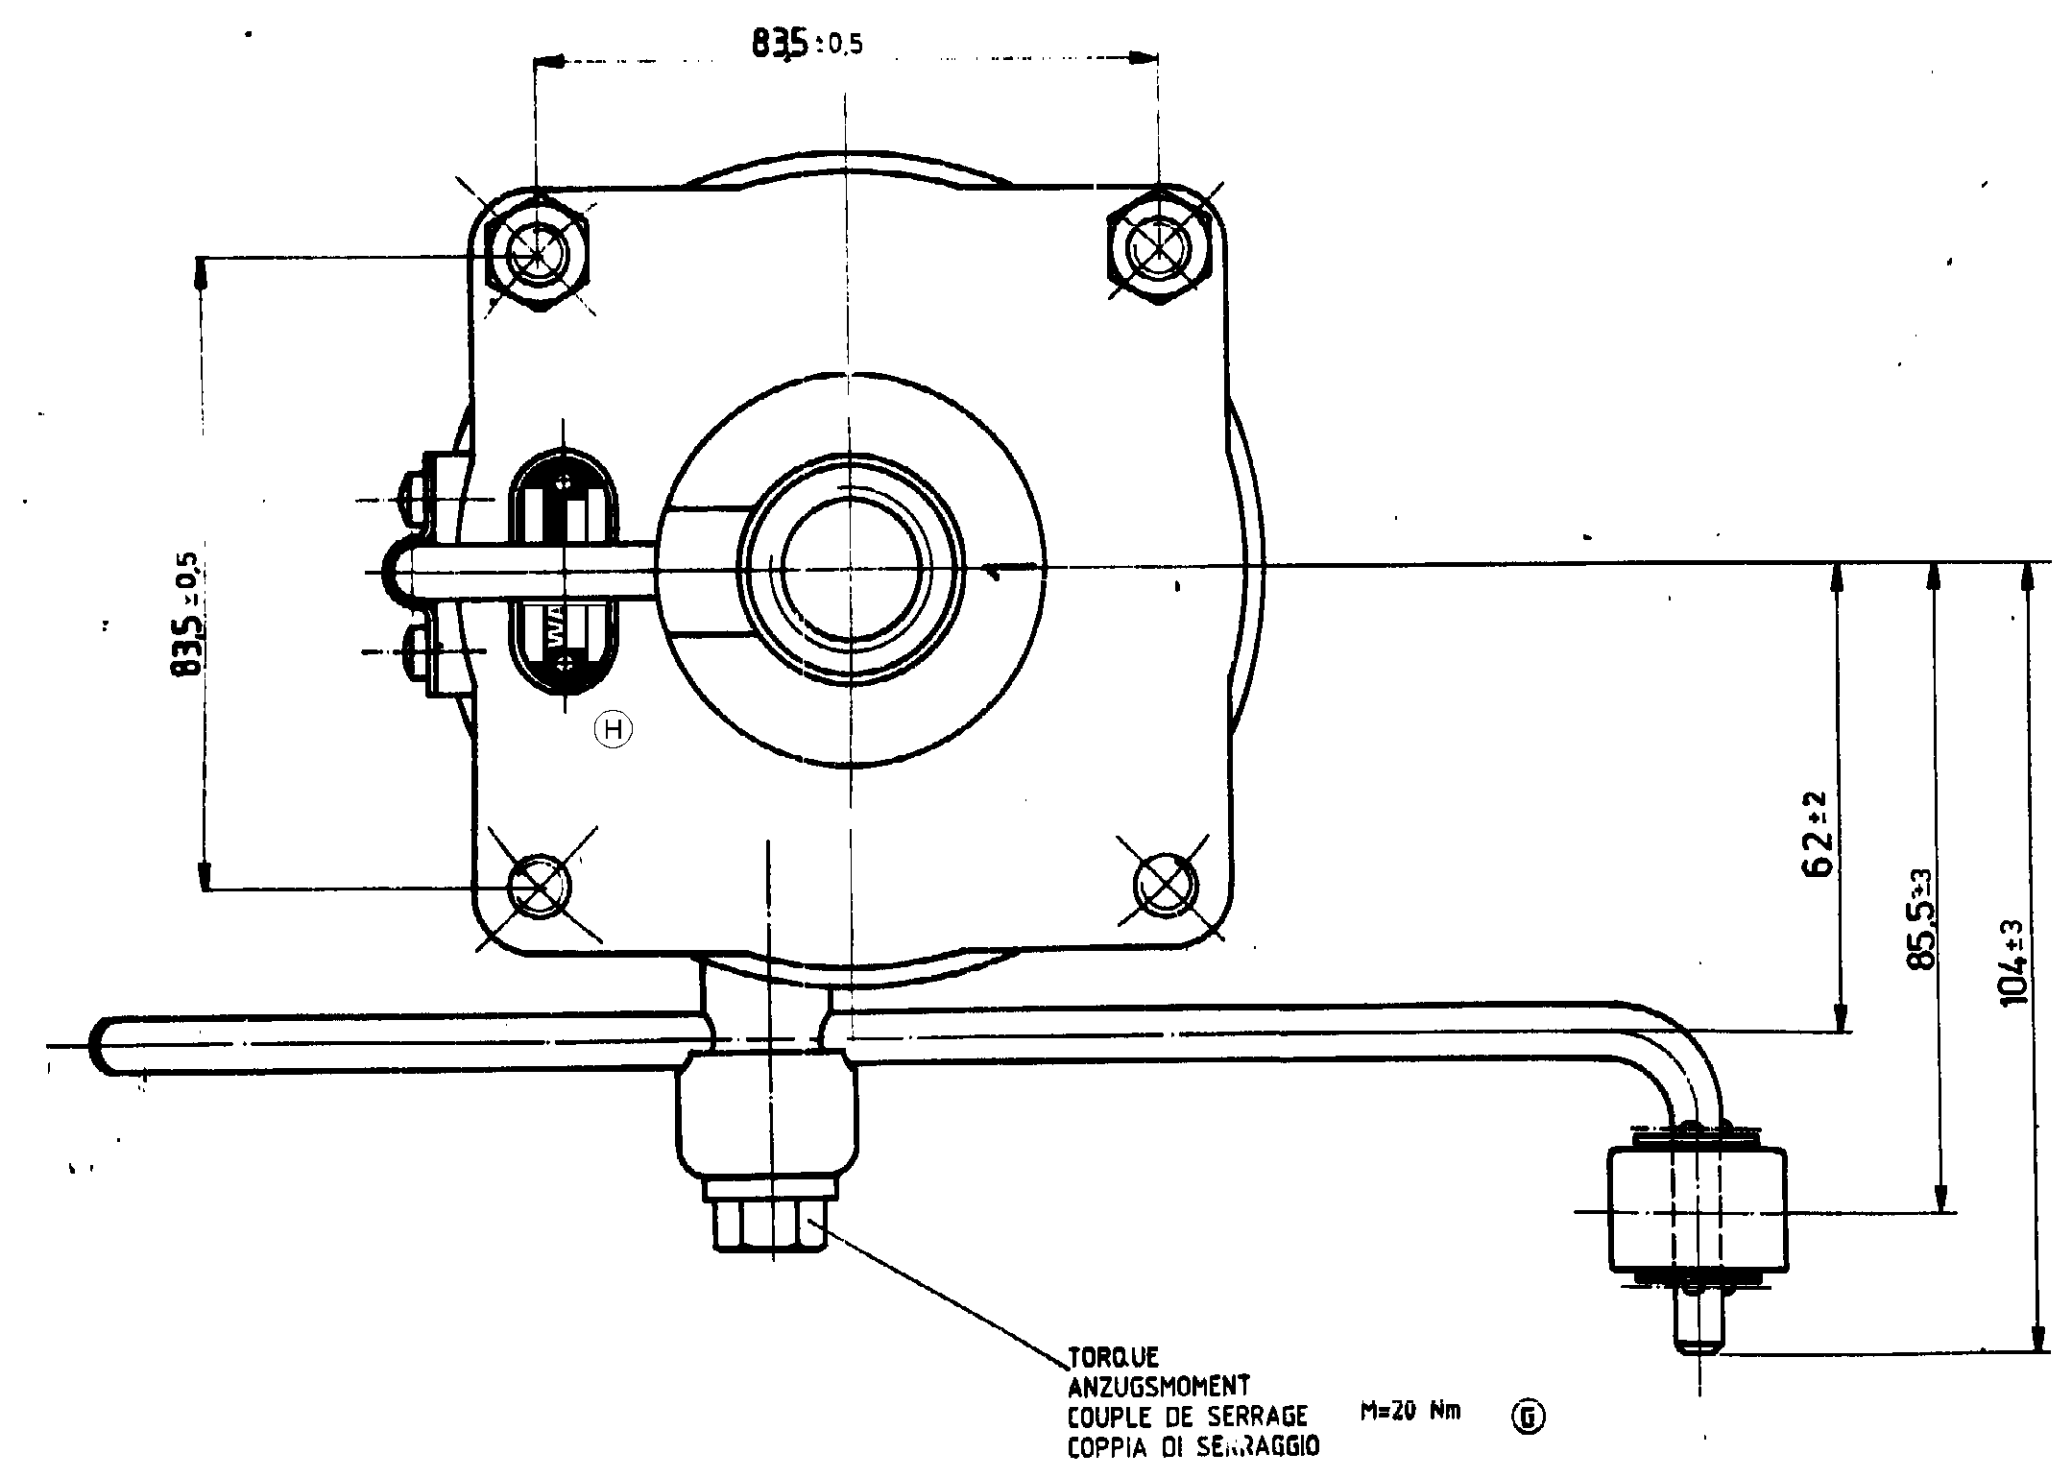

GENERAL SPECIFICATION: JED-334		FURTHER TECHNICAL DATA:	
DOC. CODE:	SHEET: TO		
GENERAL TOLERANCES		CADAM-DRAWING COPYRIGHT	
CLASS	RANGE OF NOMINAL DIMENSIONS (± mm)	DATE	SIGNATURE
1)	≤ 50 > 50 ≤ 180 > 180 ≤ 400 > 400	77-08-17	Grappa
FINE	0,5 1,0 1,5 2,0	CHECKED:	77-08-17 Menze Dei
MEDIUM	1,0 2,0 3,0 4,0	STANDARDIZATION:	78-01-05 Sommer
COARSE	2,0 3,5 5,0 6,5	PRODUCT IDENTIFICATION NO.	475 701 001 0
TAPPED HOLES ACC. ISO 4039 / JED-152		DOC. CODE	605
1) TOLERANCE CLASS APPLIED CROSSMARKED		SHEET	1/1
DCN-NO.	REV.	DATE	SHAPE CODE
075454	3xH	01-08-31	
027946	5xG	83-06-02	
011814	F	77-11-03	
EXPERT CODE 71414		PRODUCT TYPE 010X	