


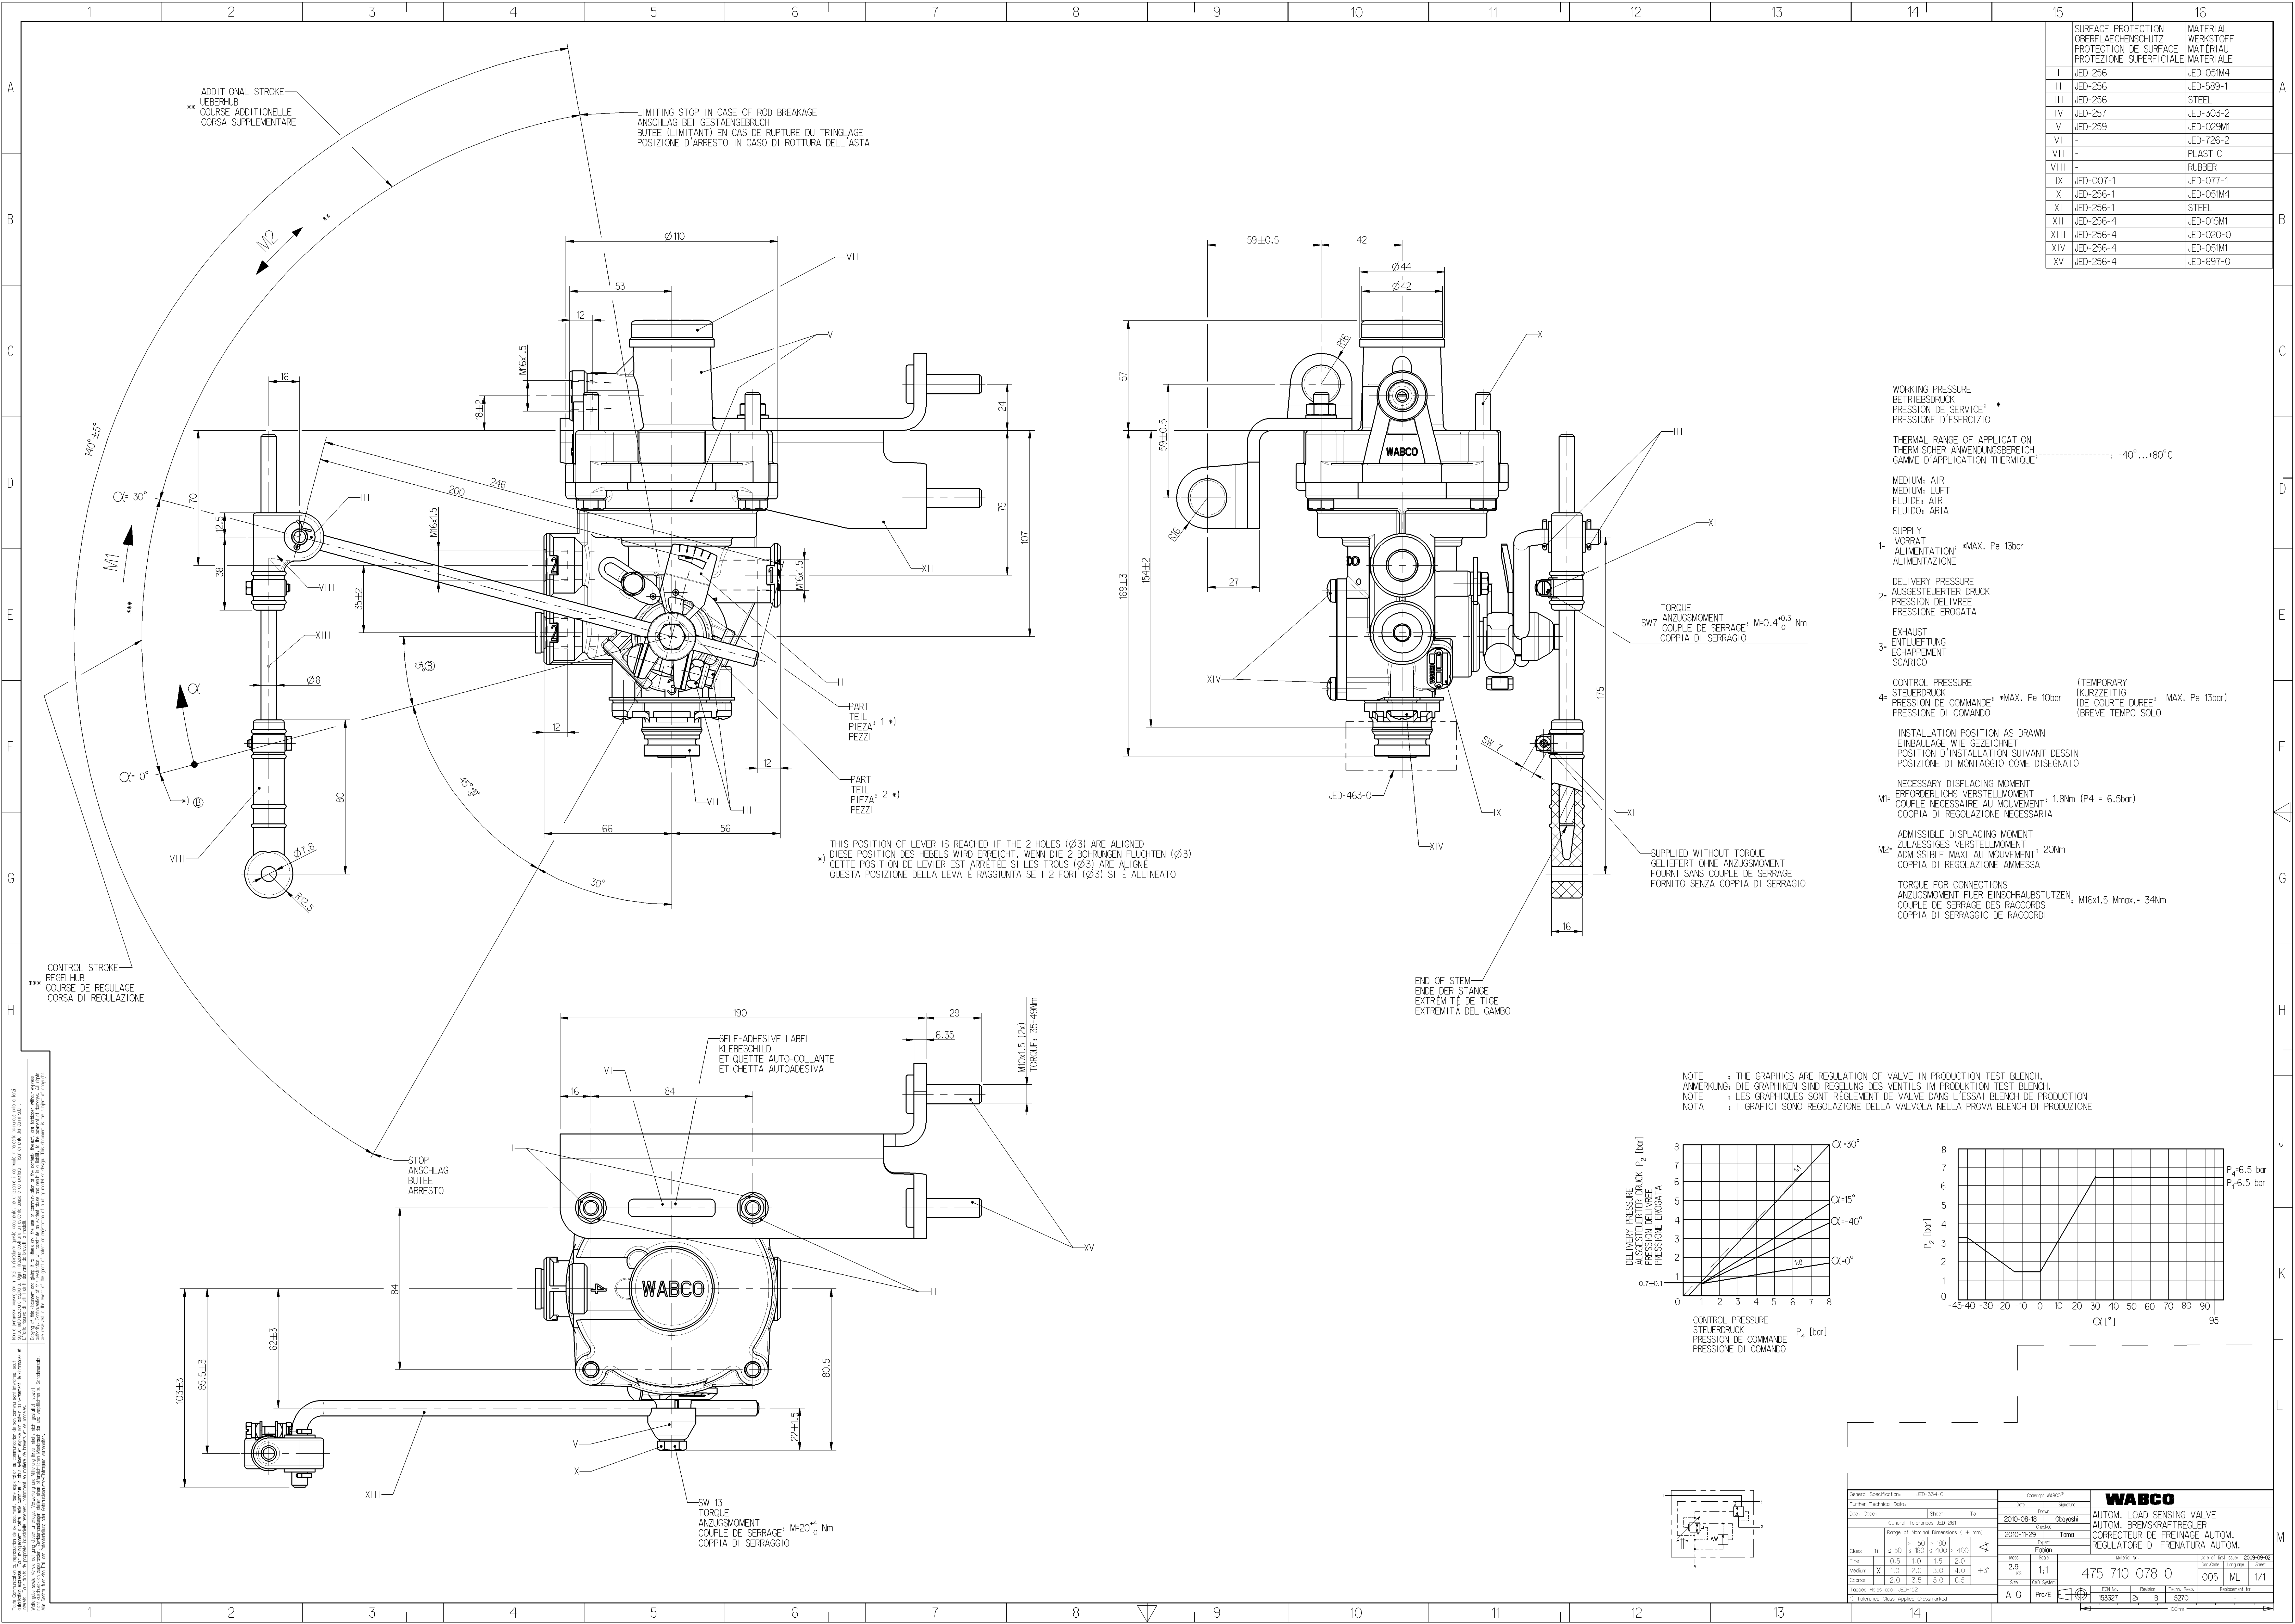

	SURFACE PROTECTION OBERFLÄCHENSCHUTZ PROTECTION DE SURFACE PROTEZIONE SUPERFICIALE	MATERIAL WERKSTOFF MATÉRIAU MATERIALE
I	JED-256	JED-05IM4
II	JED-256	JED-589-1
III	JED-256	STEEL
IV	JED-257	JED-303-2
V	JED-259	JED-023MI
VI	-	JED-726-2
VII	-	PLASTIC
VIII	-	RUBBER
IX	JED-007-1	JED-077-1
X	JED-256-1	JED-05IM4
XI	JED-256-1	STEEL
XII	JED-256-4	JED-015MI
XIII	JED-256-4	JED-020-0
XIV	JED-256-4	JED-05MI
XV	JED-256-4	JED-697-0

WORKING PRESSURE
BETRIEBSDRUCK
PRESSION DE SERVICE: *
PRESSIONE D'ESERCIZIO

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
GAMME D'APPLICATION THERMIQUE: -40°...+80°C

MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA

SUPPLY
VORRAT
1- ALIMENTATION: *MAX. Pe 13bar
ALIMENTAZIONE

DELIVERY PRESSURE
AUSGESTEUERTER DRUCK
2- PRESSION DELIVREE
PRESSIONE EROGATA

EXHAUST
ENTLUEFTUNG
3- ECHAPPEMENT
SCARICO


CONTROL PRESSURE
STEUERDRUCK
4- PRESSION DE COMMANDE: *MAX. Pe 10bar
PRESSIONE DI COMANDO (TEMPORARY
KURZZEITIG (DE COURTE DUREE: MAX. Pe 13bar)
BREVE TEMPO SOLO

INSTALLATION POSITION AS DRAWN
EINBAULAGE WIE GEZEICHNET
POSITION D'INSTALLATION SUIVANT DESSIN
POSIZIONE DI MONTAGGIO COME DISEGNATO

NECESSARY DISPLACING MOMENT
ERFORDERLICHES VERSTELLMOMENT
M1: COUPLE NECESSAIRE AU MOUVEMENT: 1.8Nm (P4 = 6.5bar)
COPIA DI REGOLAZIONE NECESSARIA

ADMISSIBLE DISPLACING MOMENT
ZULAESSIGES VERSTELLMOMENT
M2: ADMISSIBLE MAXI AU MOUVEMENT: 20Nm
COPIA DI REGOLAZIONE AMMESSA

TORQUE FOR CONNECTIONS
ANZUGSMOMENT FÜR EINSCHRAUBSTÜTZEN
COUPLE DE SERRAGE DES RACCORDS
M16x1.5 Mmax.= 34Nm
COPIA DI SERRAGGIO DE RACCORDI

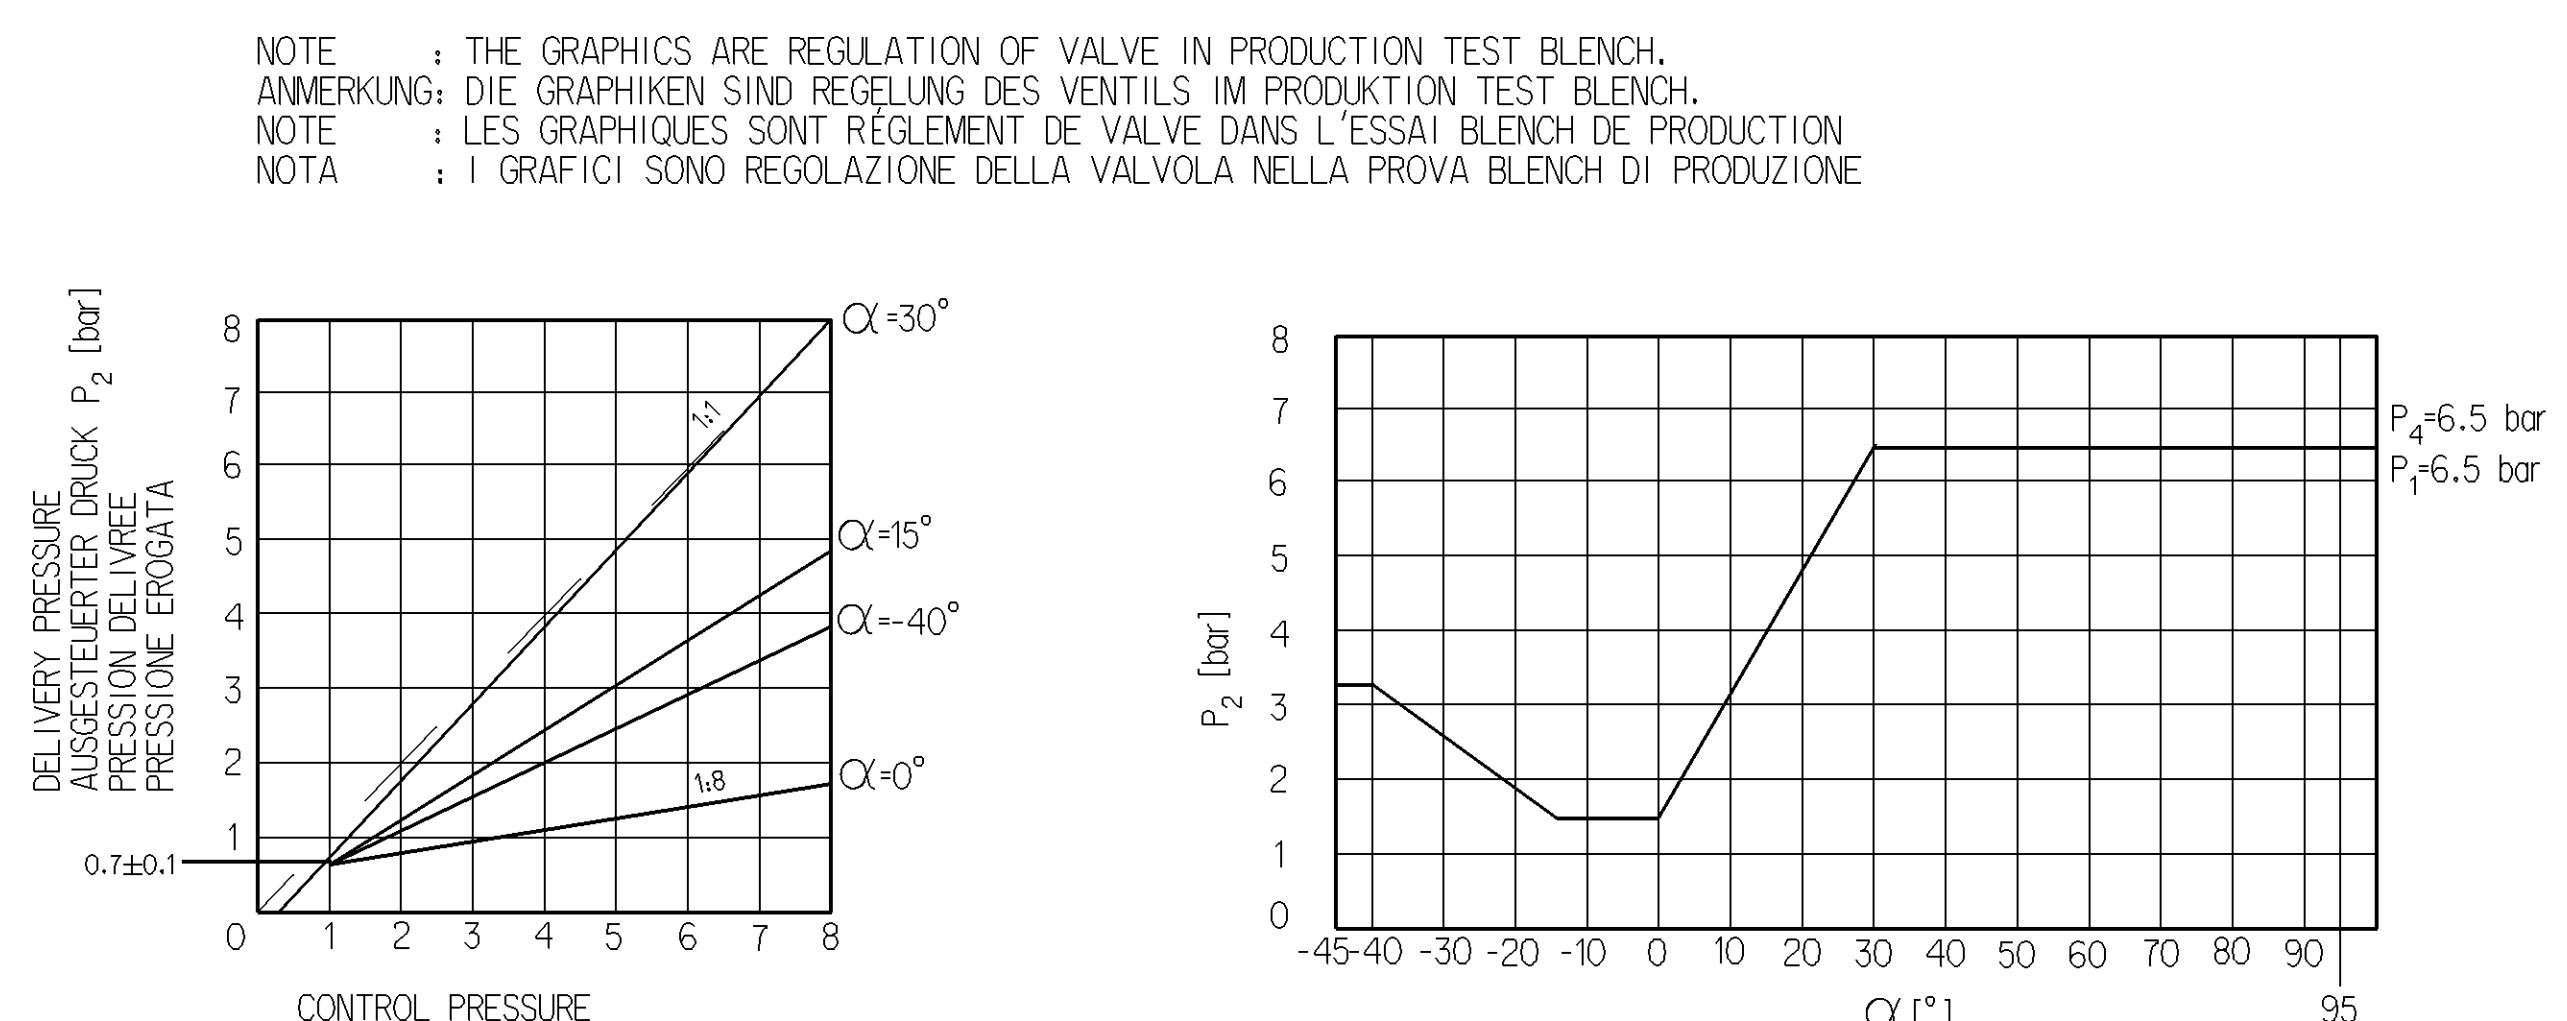

General Specification: JED-354-0		Copyright WABCO®		WABCO	
Further Technical Data:		Date: 2010-08-18		AUTOM. LOAD SENSING VALVE	
Doc. Code:		Sheet: 1 To: 1		AUTOM. BREMSKRAFTREGLER	
General Tolerances: JED-201		Date: 2010-11-29		CORRECTEUR DE FREINAGE AUTOM.	
Range of Nominal Dimensions (± mm)		Tolerance		REGOLATORE DI FREINATURA AUTOM.	
Class	II	± 0.1	± 0.1		
Size	0.5	1.0	1.5		
Medium	X	1.0	2.0		
Control	2.0	3.5	5.0		
Tapped Holes acc. JED-152		A O		475 710 078 0	
Tolerance Class: Applies to non-tapped		Pro/E		005 ML 1/1	