
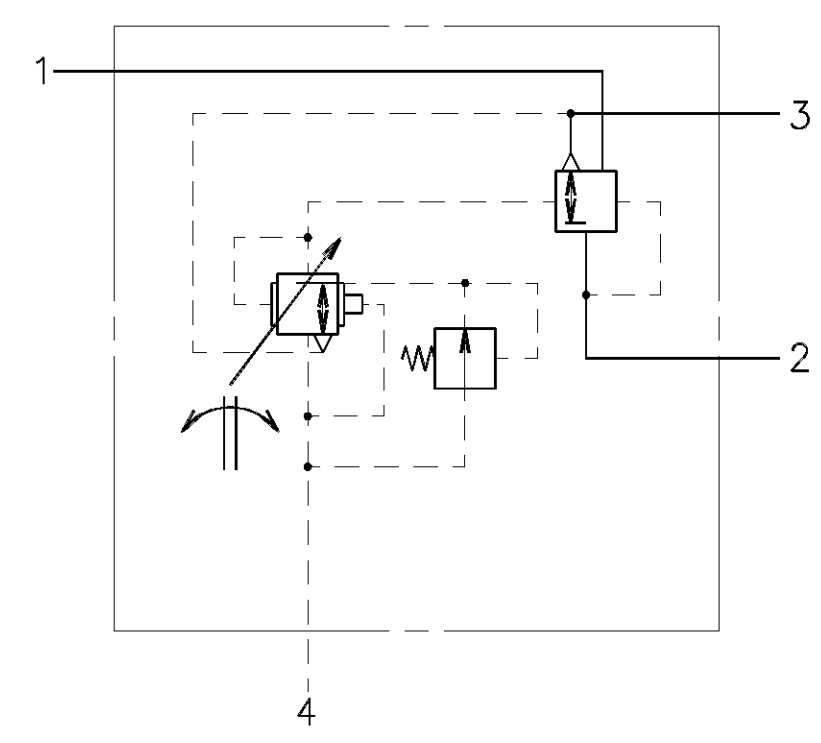
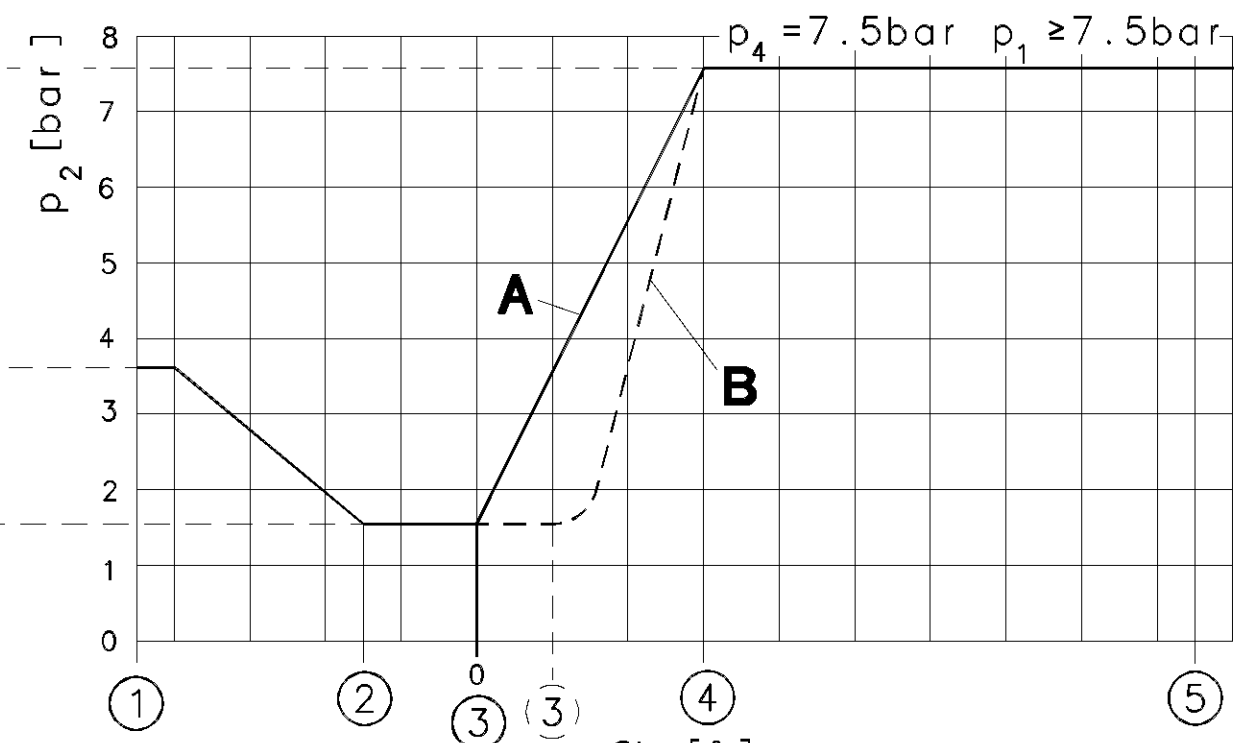
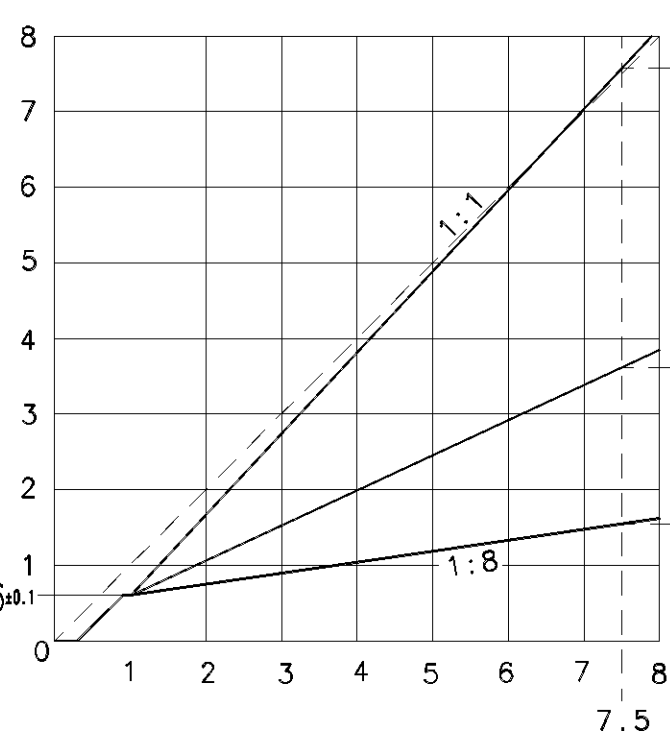
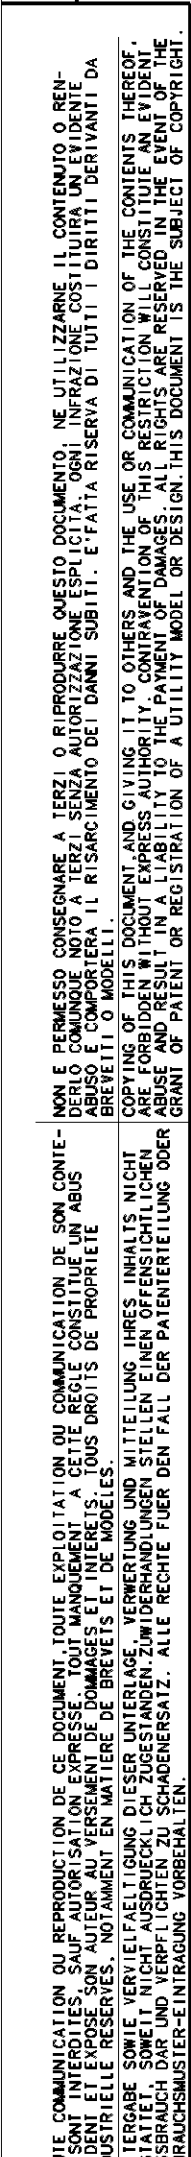




475 710 046 0		20	25	50 ⁺¹⁰ ₋₈	100	0	2.7	50 ⁺¹⁰ ₋₁₃₀	146		×
475 710 045 0		20	25	50 ⁺¹⁰ ₋₈	80	0	2.7	50 ⁺¹⁰ ₋₁₃₀	146		×
475 710 144 0		30	15	45 ⁺¹⁰ ₋₈	85	0	1.8	50 ⁺¹⁰ ₋₁₃₀	146	×	
WABCO	CUSTOMER'S NO. KUNDEN-NR. NO. CLIENT NO. CLIENTE	α	β	γ	δ	ϵ	[Nm] M1	L	L₁	A	B
IDENTIFICATION		[°]									

GENERAL SPECIFICATION:				JED-334				
FURTHER TECHNICAL DATA:								
DOC. CODE:		SHEET:		10				
GENERAL TOLERANCES								
RANGE OF NOMINAL DIMENSIONS (± mm)								
CLASS 1)		≤50	> 50 > 180 > 400					
		0,5	1,0			1,5	2,0	
COARSE	x	1,0	2,0			3,0	4,0	
MEDIUM		2,0	3,5			5,0	6,5	
TAPPED HOLES ACC. -H9/-h9 or JED-152						071937	2x8	99-11-02
1) TOLERANCE CLASS APPLIED CROSSMAKER						070073	1x8	99-06-07
						070003	4x4	98-11-27
				DCN-N°		REV.	DATE	

CADAM-DRAWING COPYRIGHT		WABCO	
DATE	SIGNATURE		
DRAWN: 98-10-05 HOERSTMANN		AUTOM. LOAD-SENSING VALVE AUTOM. BREMSKRAFTREGLER CORRECTEUR DE FREINAGE AUTOM. REGOLATORE DI FRENATURA AUTOM.	
CHECKED: 98-10-05 FAUCK			
STANDARDIZATION:			
MASS	SCALE	PRODUCT IDENTIFICATION NO.	
1.7 KG	1 : 1	475 710 094 0	DOC. CODE
SIZE	I.R.I.		653
A 1	140		SHAPE CODE
			REPLACEMENT FOR

MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA

1= SUPPLY
VORRAT
ALIMENTATION
ALIMENTAZIONE

MAX. p_e 13bar

2= DELIVERY PRESSURE
AUSGESTEUERTER DRUCK
PRESSION DELIVREE
PRESSIONE EROGATA

3= EXHAUST
ENTLUEFTUNG
ECHAPPEMENT
SCARICO

4 = CONTROL PRESSURE
STEUERDRUCK
PRESSION DE COMMANDE
PRESSIONE DI COMANDO

MAX. p_e 10bar

Σ = INSTALLATION POSITION
EINBAULAGE
POSITION D'INSTALLATION
POSIZIONE DI MONTAGGIO

M1= NECESSARY DISPLACING MOMENT
ERFORDERLICHES VERSTELLMOMENT
COUPLE NECESSAIRE AU MOUVEMENT
COPPIA DI REGOLAZIONE NECESSARIA

M2= ADMISSIBLE DISPLACING MOMENT: 20 Nm
ZULAESSIGES VERSTELLMOMENT:
ADMISSIBLE MAXI AU MOUVEMENT:
COPPIA DI REGOLAZIONE AMMESSA:

○ = POSITION OF THE LEVER
HEBELSTELLUNG
POSITION DU LEVIER
POSIZIONE LEVA

TORQUE FOR CONNECTIONS:
ANZUGSMOMENT FÜR EINSCHRAUBSTUTZEN: M16x1.5: $M_{max.} = 34 \text{ Nm}$
COUPLE DE SERRAGE DES RACCORDS: M22x1.5: $M_{max.} = 53 \text{ Nm}$
COPPIA DI SERRAGGIO DEI RACCORDI:

CONTROL PRESSURE
STEUERDRUCK
PRESSION DE COMMANDE p_4 [bar]
PRESSIONE DI COMANDO

TORQUE :
ANZUGSMOMENT : M=20 Nm
COUPLE DE SERRAGE :
COPPIA DI SERRAGGIO :

WRENCH SIZE ACROSS FLATS WS
SCHLUESSELWEITE SW
LARGEUR DE CLE
LARGHEZZA IN CHIAVE

WABCO

AUTOM. LOAD-SENSING VALVE
AUTOM. BREMSKRAFTREGLER
CORRECTEUR DE FREINAGE AUTOM
REGOLATORE DI FRENATA AUTOM

PRODUCT IDENTIFICATION NO.				DOC. CODE	SHEET
475 710 094 0				653	1/

		SHAPE CODE	REPLACEMENT FOR

EXPERT CODE

7	4	2
---	---	---

PRODUCT TYPE	00	0
--------------	----	---