

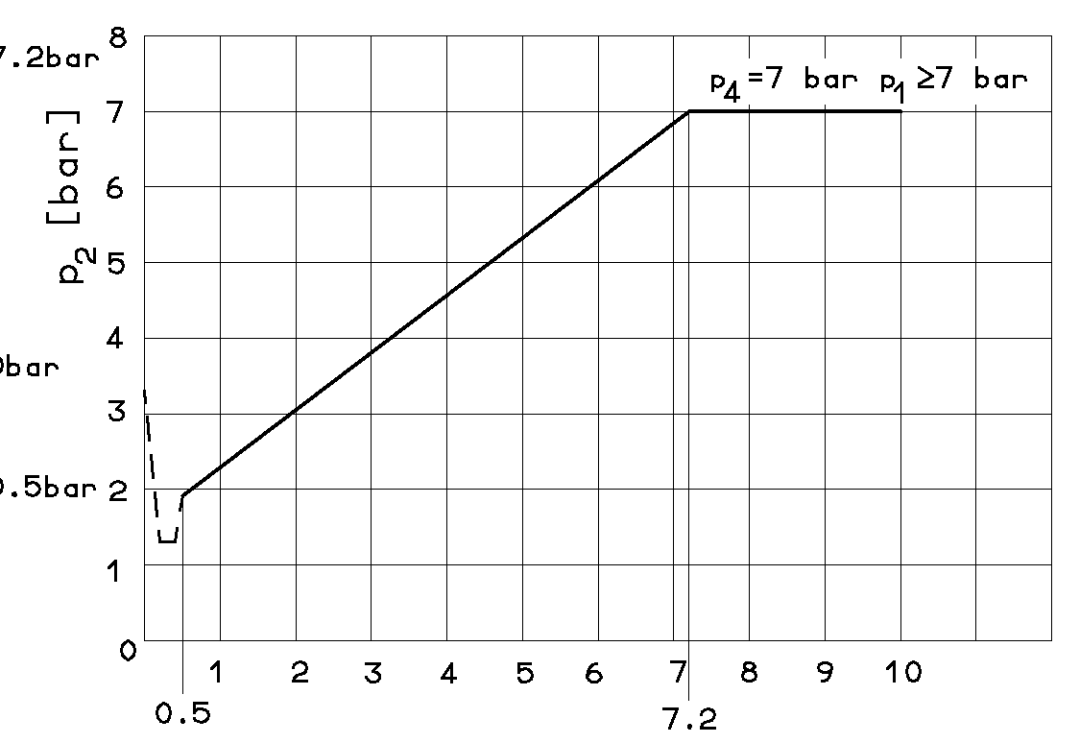


TORQUE FOR CONNECTIONS:
ANZUGSMOMENT FUER EINSCHRAUBSTUTZEN: M12x1.5: $M_{max.} = 21 \text{ Nm}$
COUPLE DE SERRAGE DES RACCORDS: M16x1.5: $M_{max.} = 34 \text{ Nm}$ ^(A)
COPPIA DI SERRAGGIO DEI RACCORDI:

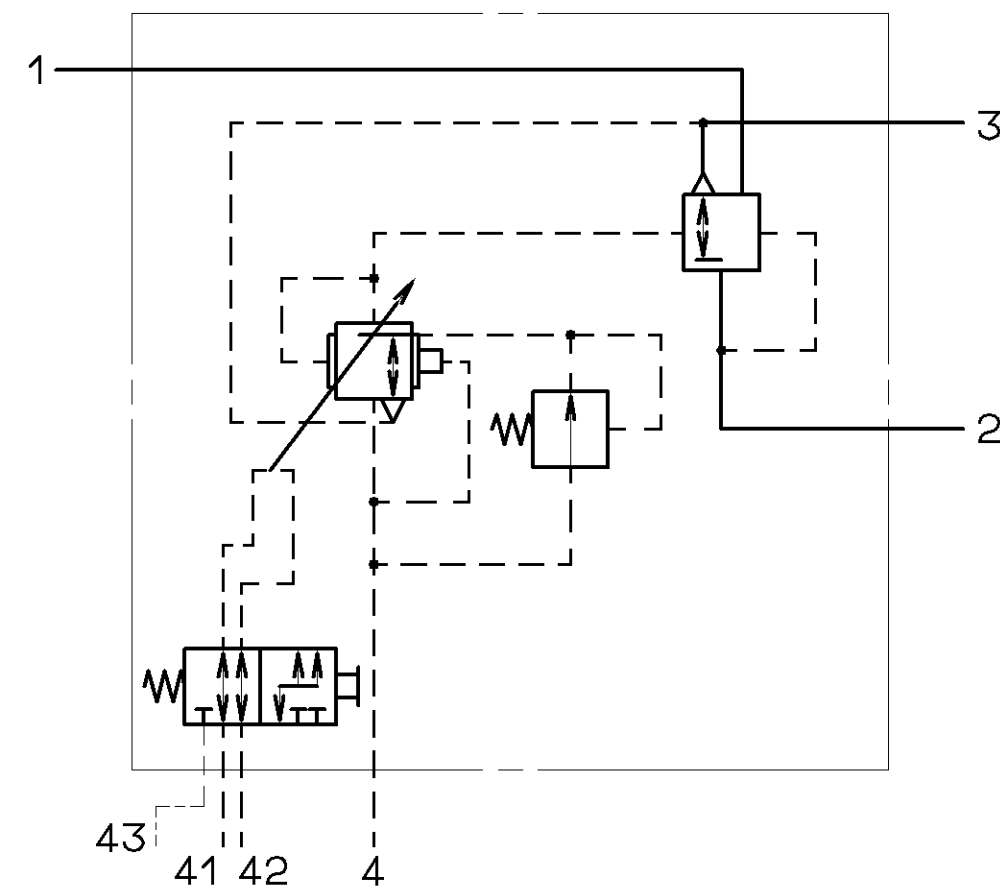

CONTROL PRESSURE
STEUERDRUCK $p_{41}=p_{42}$ [bar]
PRESSION DE COMMANDE
PRESSIONE DI COMANDO

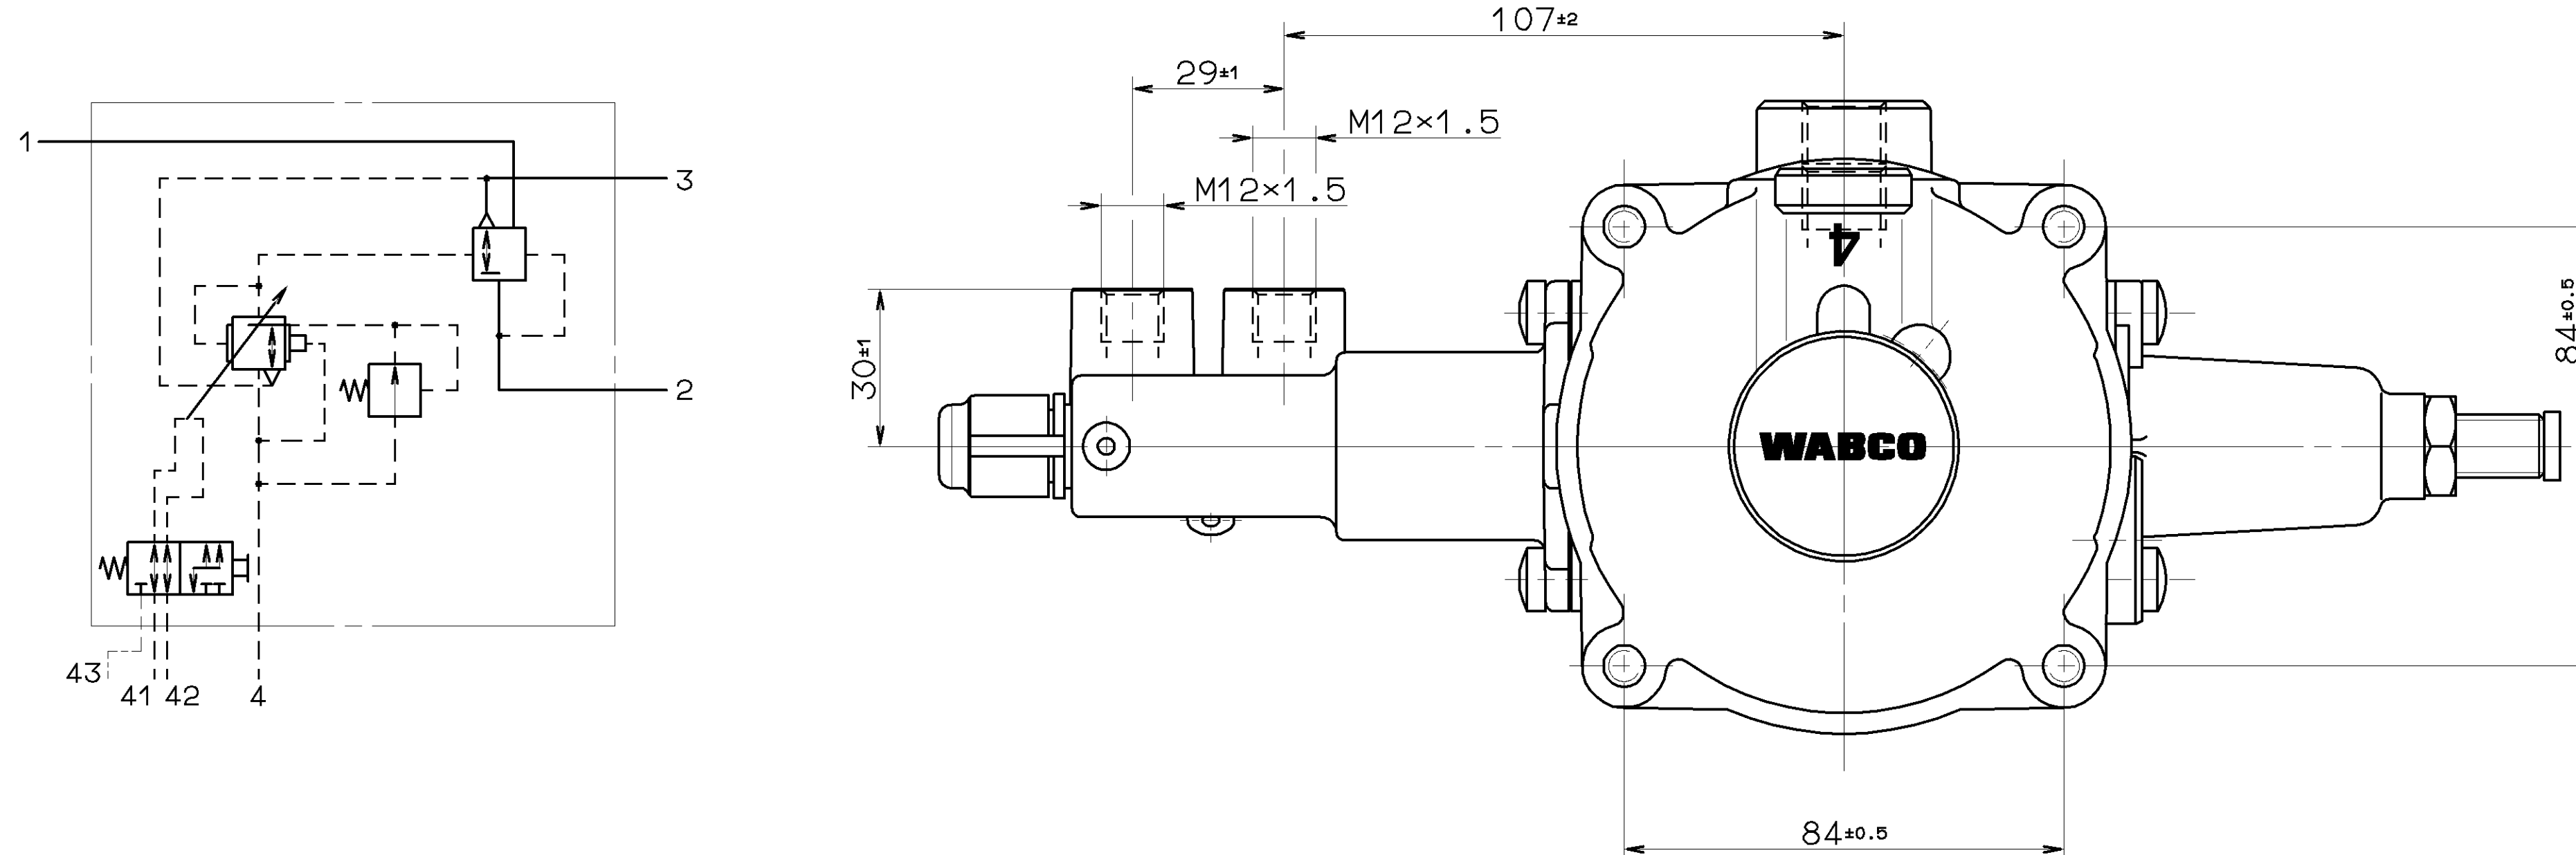

GENERAL SPECIFICATION: JED-334				CADAM-DRAWING COPYRIGHT		WABCO	
FURTHER TECHNICAL DATA:				DATE SIGNATURE			
DOC. CODE: SHEET: TO				DRAWN:		AUTOM. LOAD-SENSING VALVE	
GENERAL TOLERANCES				88-12-15 HAUKE		AUTOM. BREMSKRAFTREGLER	
RANGE OF NOMINAL DIMENSIONS (± mm)				88-12-23 FAUCK DEI		CORRECTEUR DE FREINAGE AUTOM.	
CLASS 1)				STANDARDIZATION:		REGOLATORE DI FREINATURA AUTOM.	
FINE				89-01-10 PANTZER			
MEDIUM				MASS SCALE		PRODUCT IDENTIFICATION NO.	
COARSE				SIZE 1:1		DOC. CODE SHEET	
TAPPED HOLES ACC. ISO 4039 / JED-152		049079 5xA 92-03-31		A 1 1:1		475 711 055 0 605 1 1	
1) TOLERANCE CLASS APPLIED CROSSHATCHED		DON-NO. REV. DATE		SHAPE CODE		REPLACEMENT FOR	
9		100mm		EXPERT CODE 742		PRODUCT TYPE 000	