

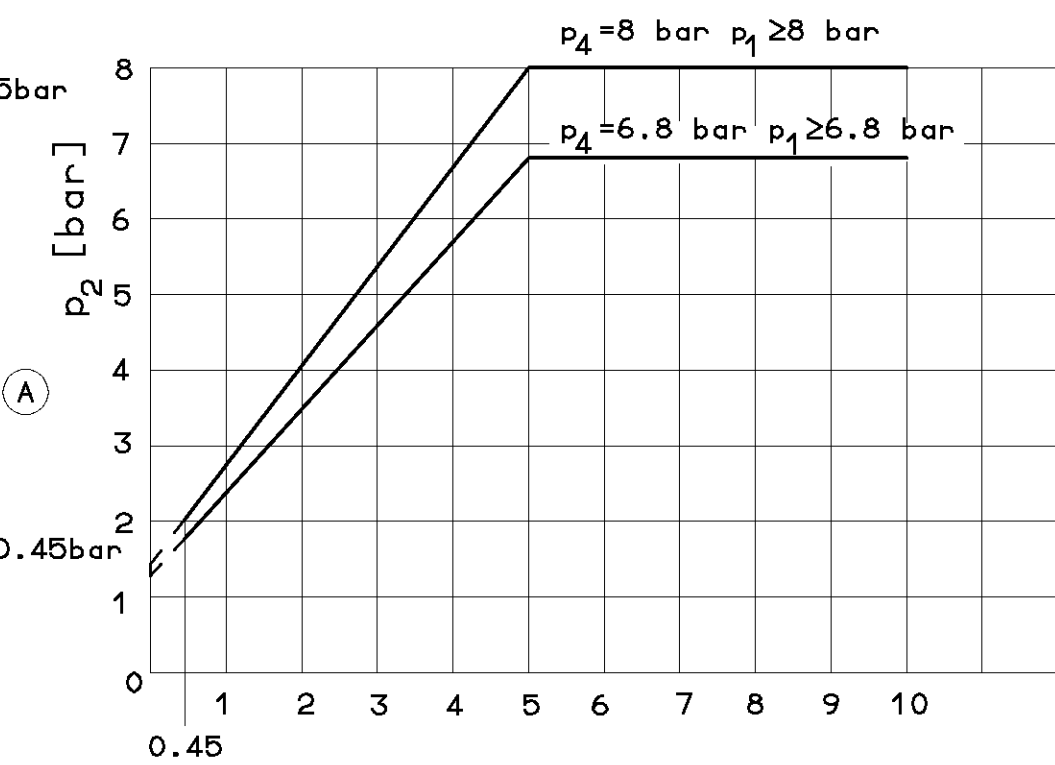
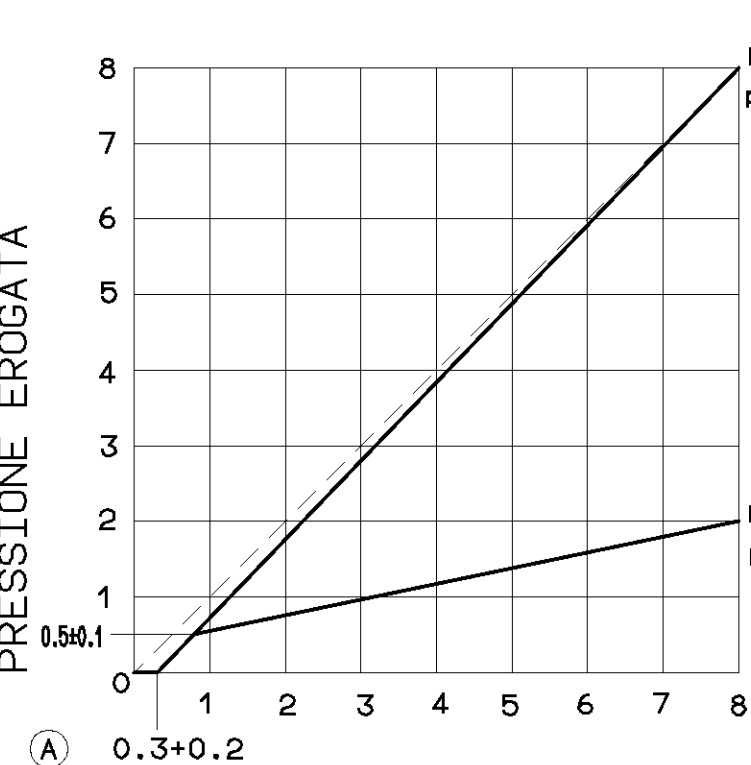
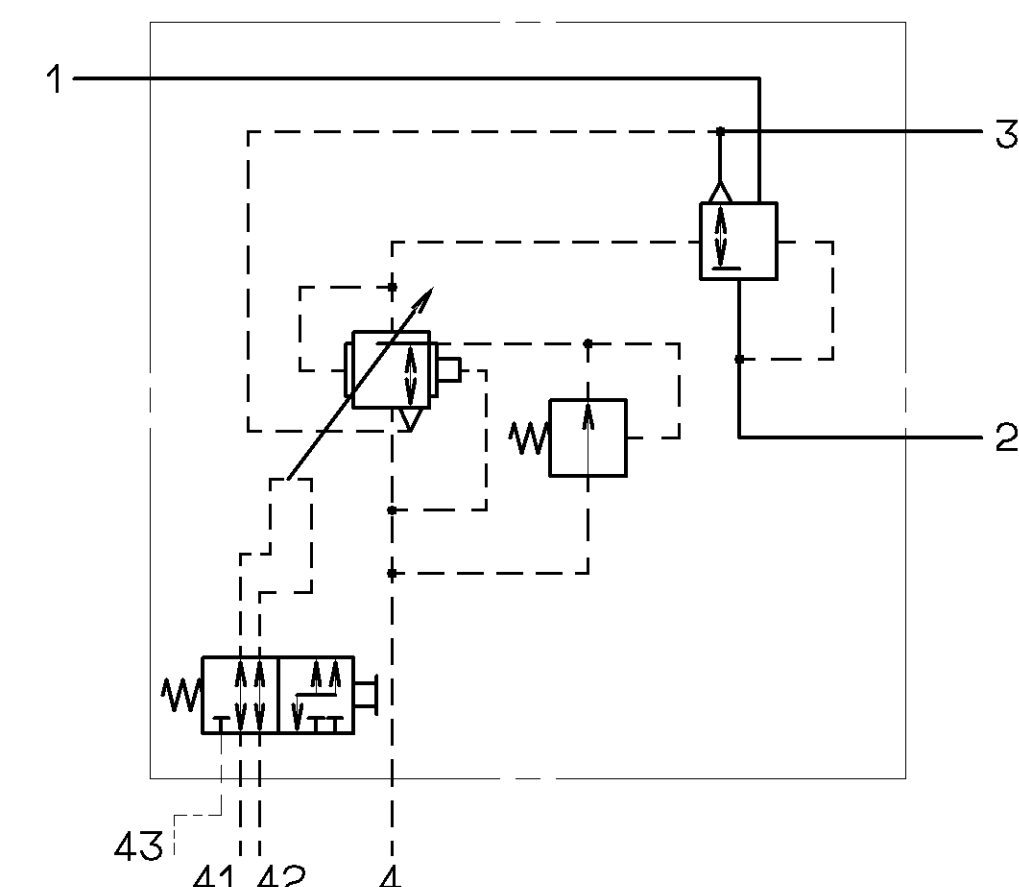


TORQUE FOR CONNECTIONS:
ANZUGSMOMENT FUER EINSCHRAUBSTUTZEN: M16x1.5: $M_{max.} = 34 \text{ Nm}$
COUPLE DE SERRAGE DES RACCORDS: M22x1.5: $M_{max.} = 53 \text{ Nm}$ (A)
COPPIA DI SERRAGGIO DEI RACCORDI:

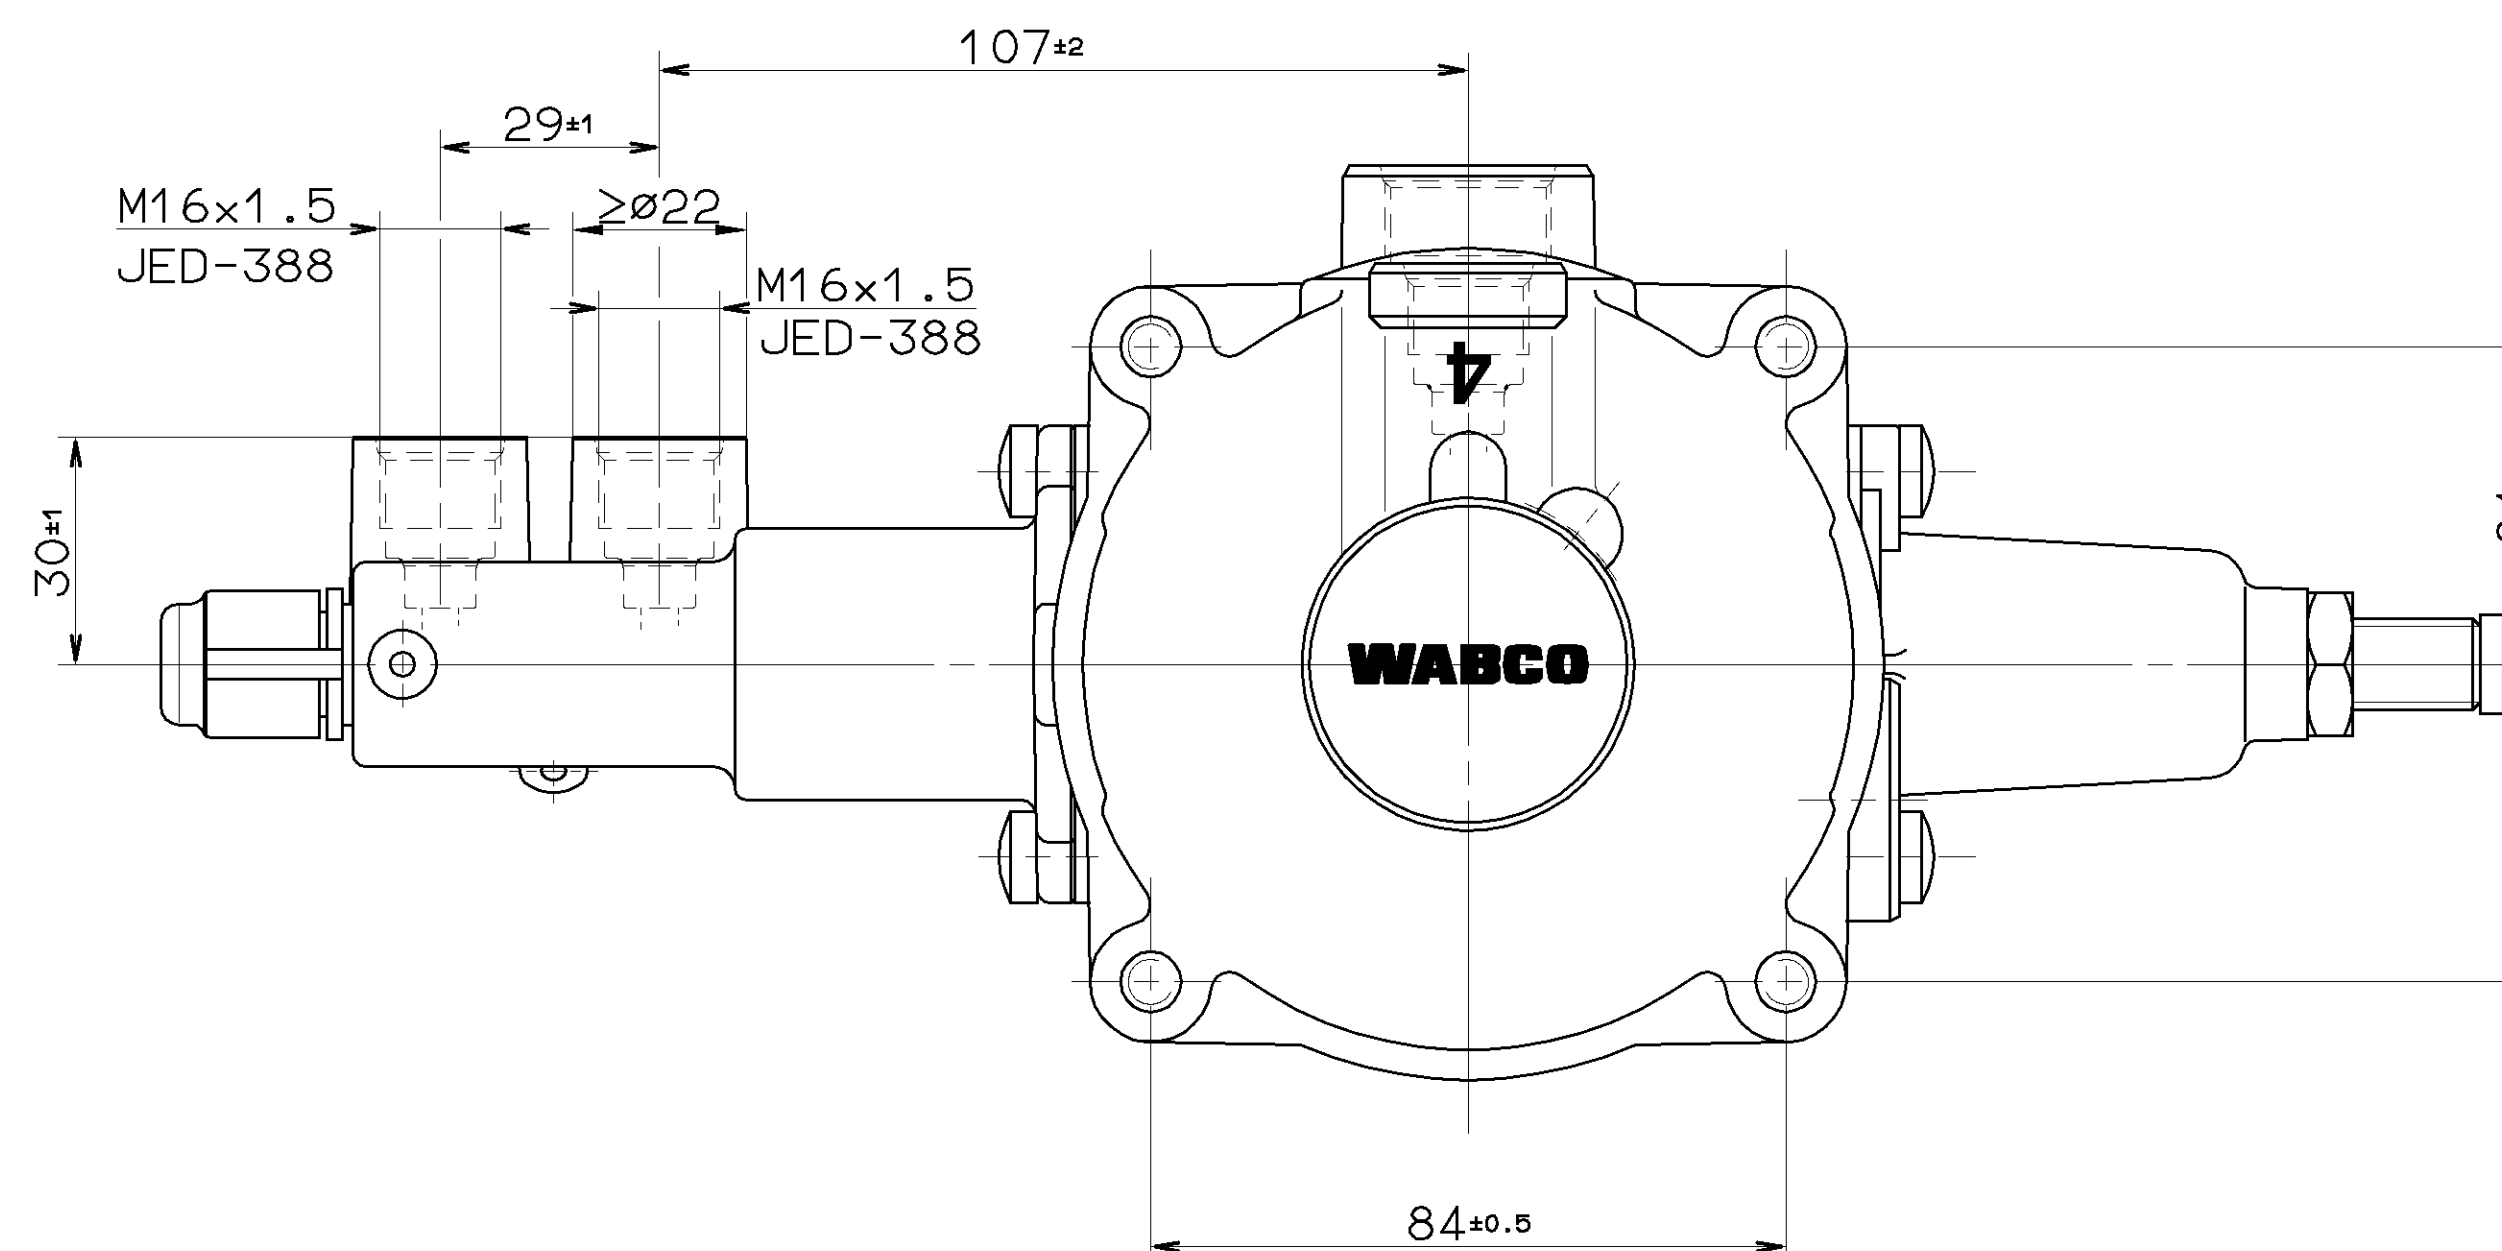

CONTROL PRESSURE
STEUERDRUCK $p_{41}=p_{42}$ [bar]
PRESSION DE COMMANDE
PRESSIONE DI COMANDO

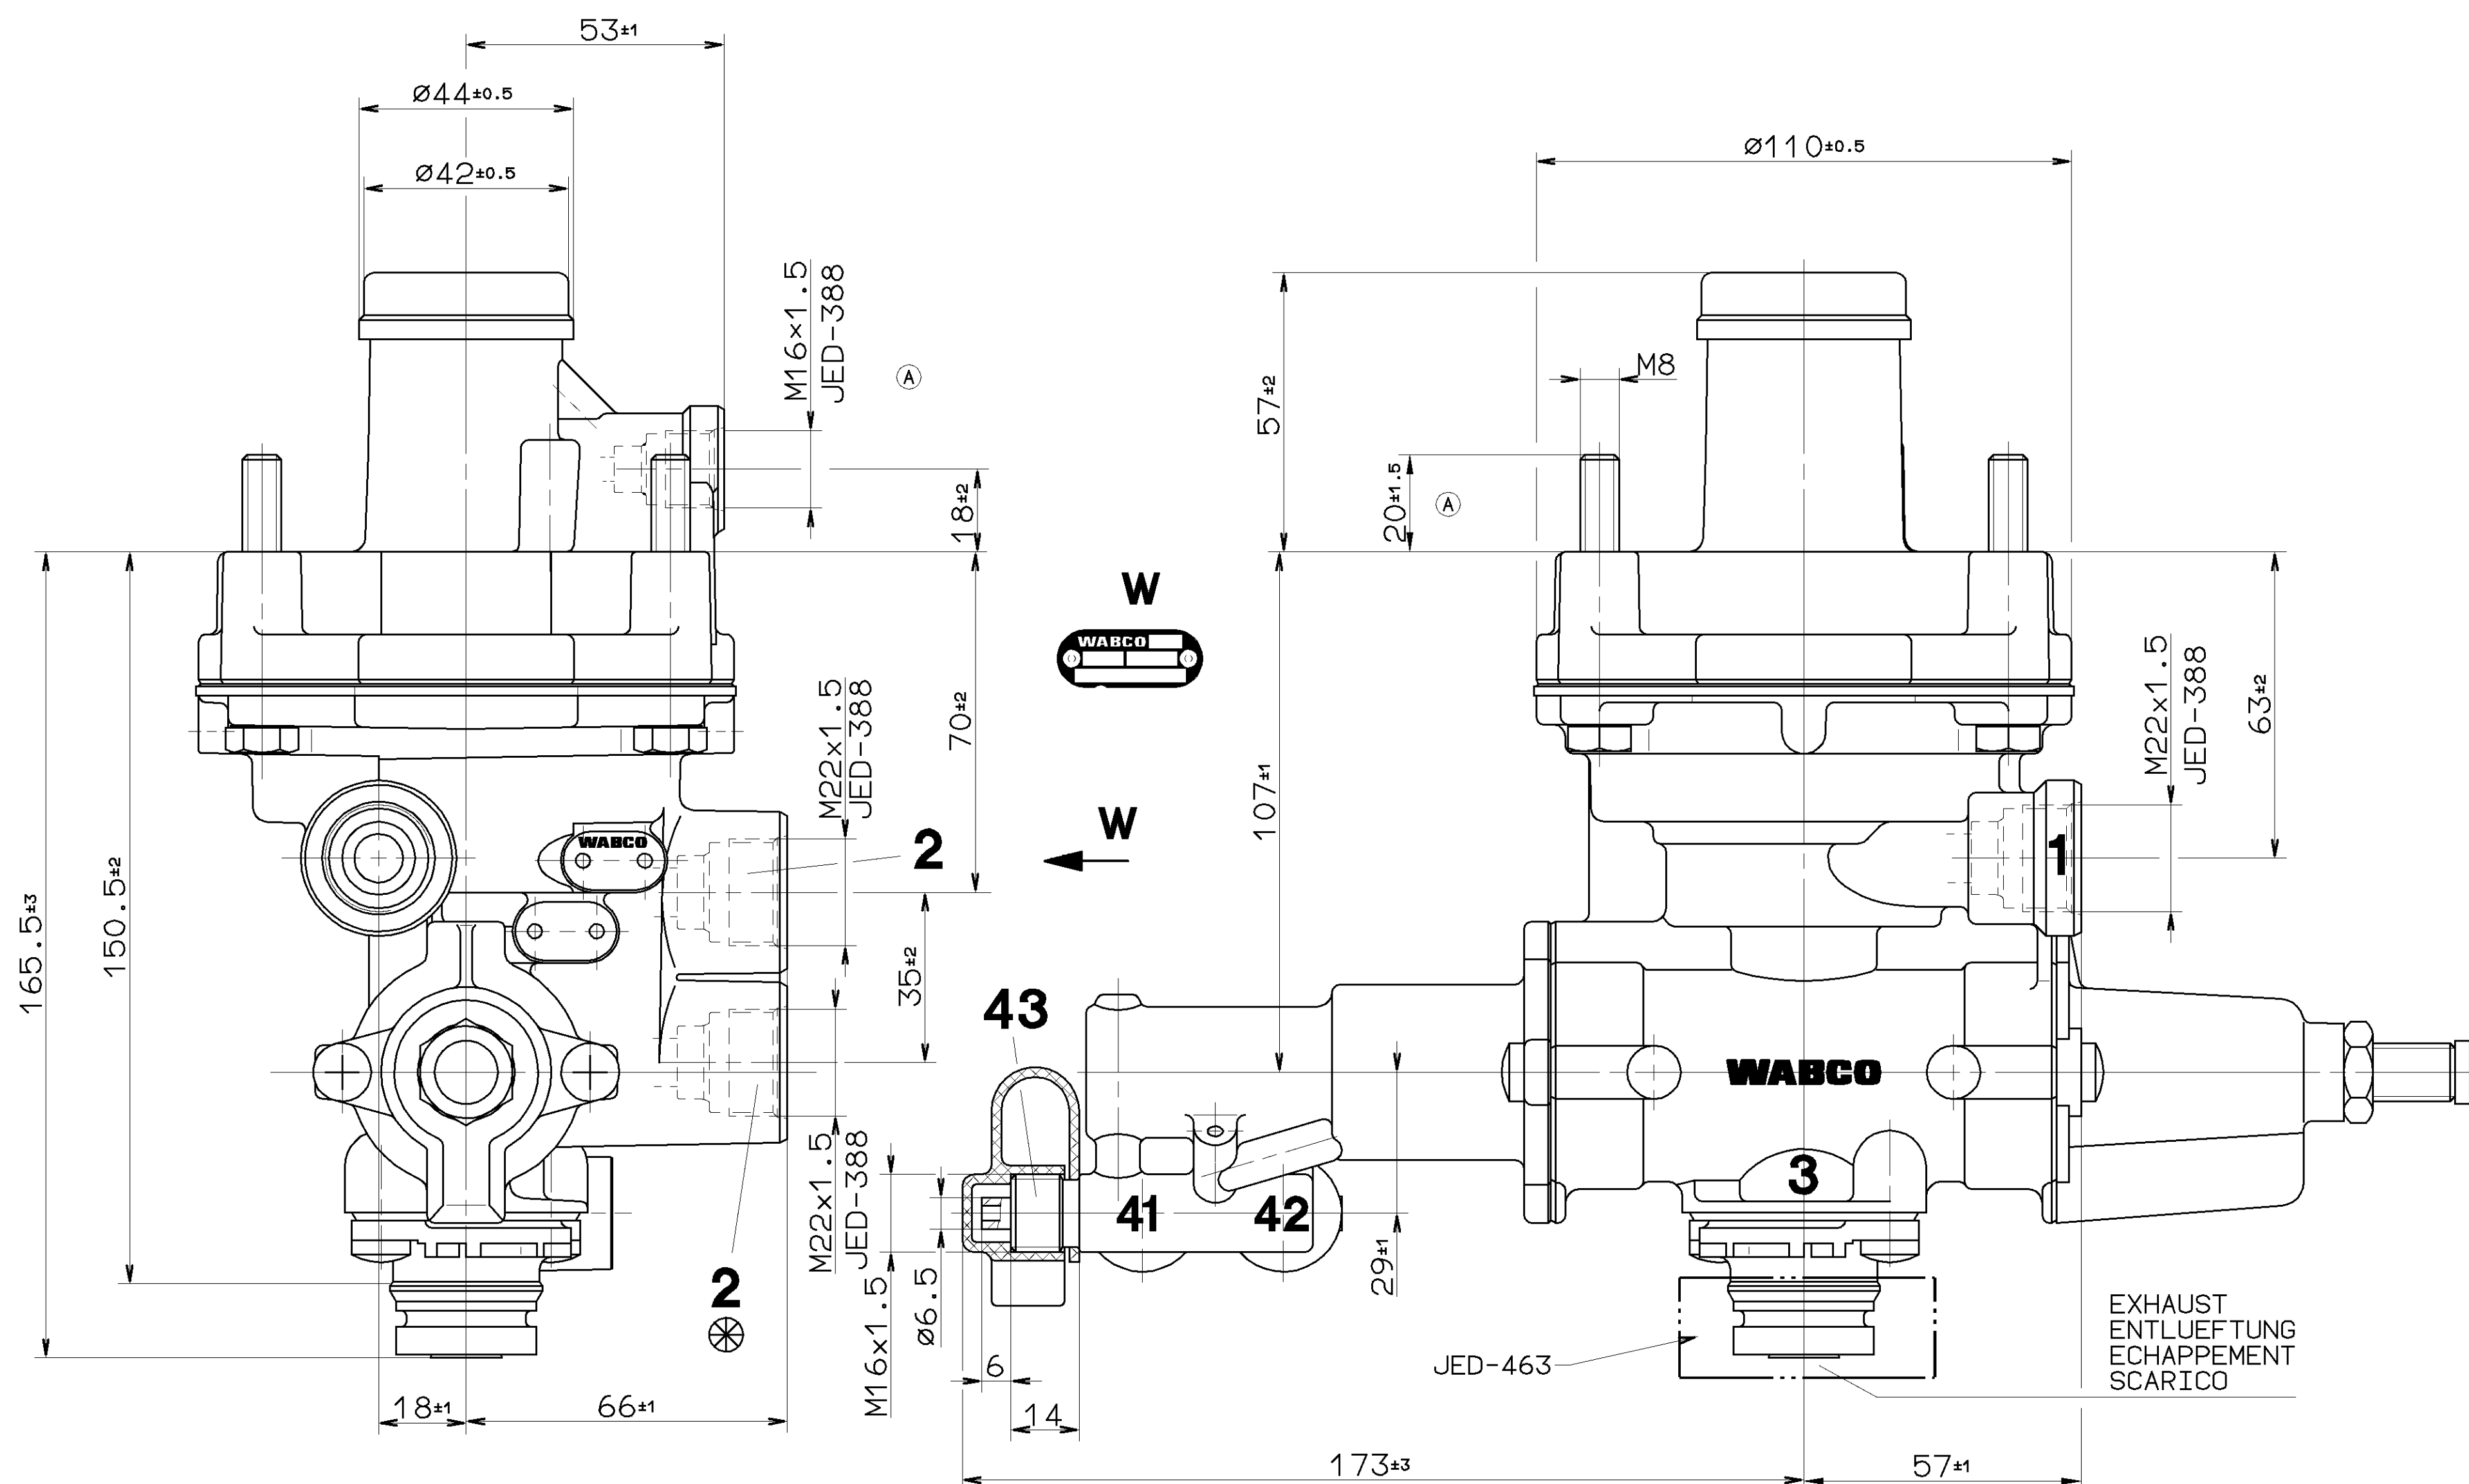

GENERAL SPECIFICATION: JED-384						CADDAM-DRAWING COPYRIGHT						WABCO					
FURTHER TECHNICAL DATA:						DATE SIGNATURE											
DOC. CODE: SHEET: TO						DRAWN: 92-08-14 KRETER CHECKED: FAUCK 92-08-18 KIEL DEIKE STANDARDIZATION: 92-08-18 PANTZER						AUTOM.LOAD-SENSING VALVE AUTOM.BREMSEKRAFTREGLER CORRECTEUR DE FREINAGE AUTOM. REGULATEUR DI FRENATURA AUTOM.					
GENERAL TOLERANCES																	
RANGE OF NOMINAL DIMENSIONS (± mm)																	
CLASS 1)						> 50 >180 >400											
FINE						≤50 ≤180 ≤400											
MEDIUM						0,5 1,0 1,5 2,0						± 3*					
COARSE						X 1,0 2,0 3,0 4,0											
TAPPED HOLES ACC. ISO 4013 / JED-482						JED-388											
1) TOLERANCE CLASS APPLIED CROSSMARKED						DON-NO. REV. DATE											
9						100mm											
						SHAPE CODE REPLACEMENT FOR											
						7 4 2						PRODUCT TYPE 01070					

[illegible]