

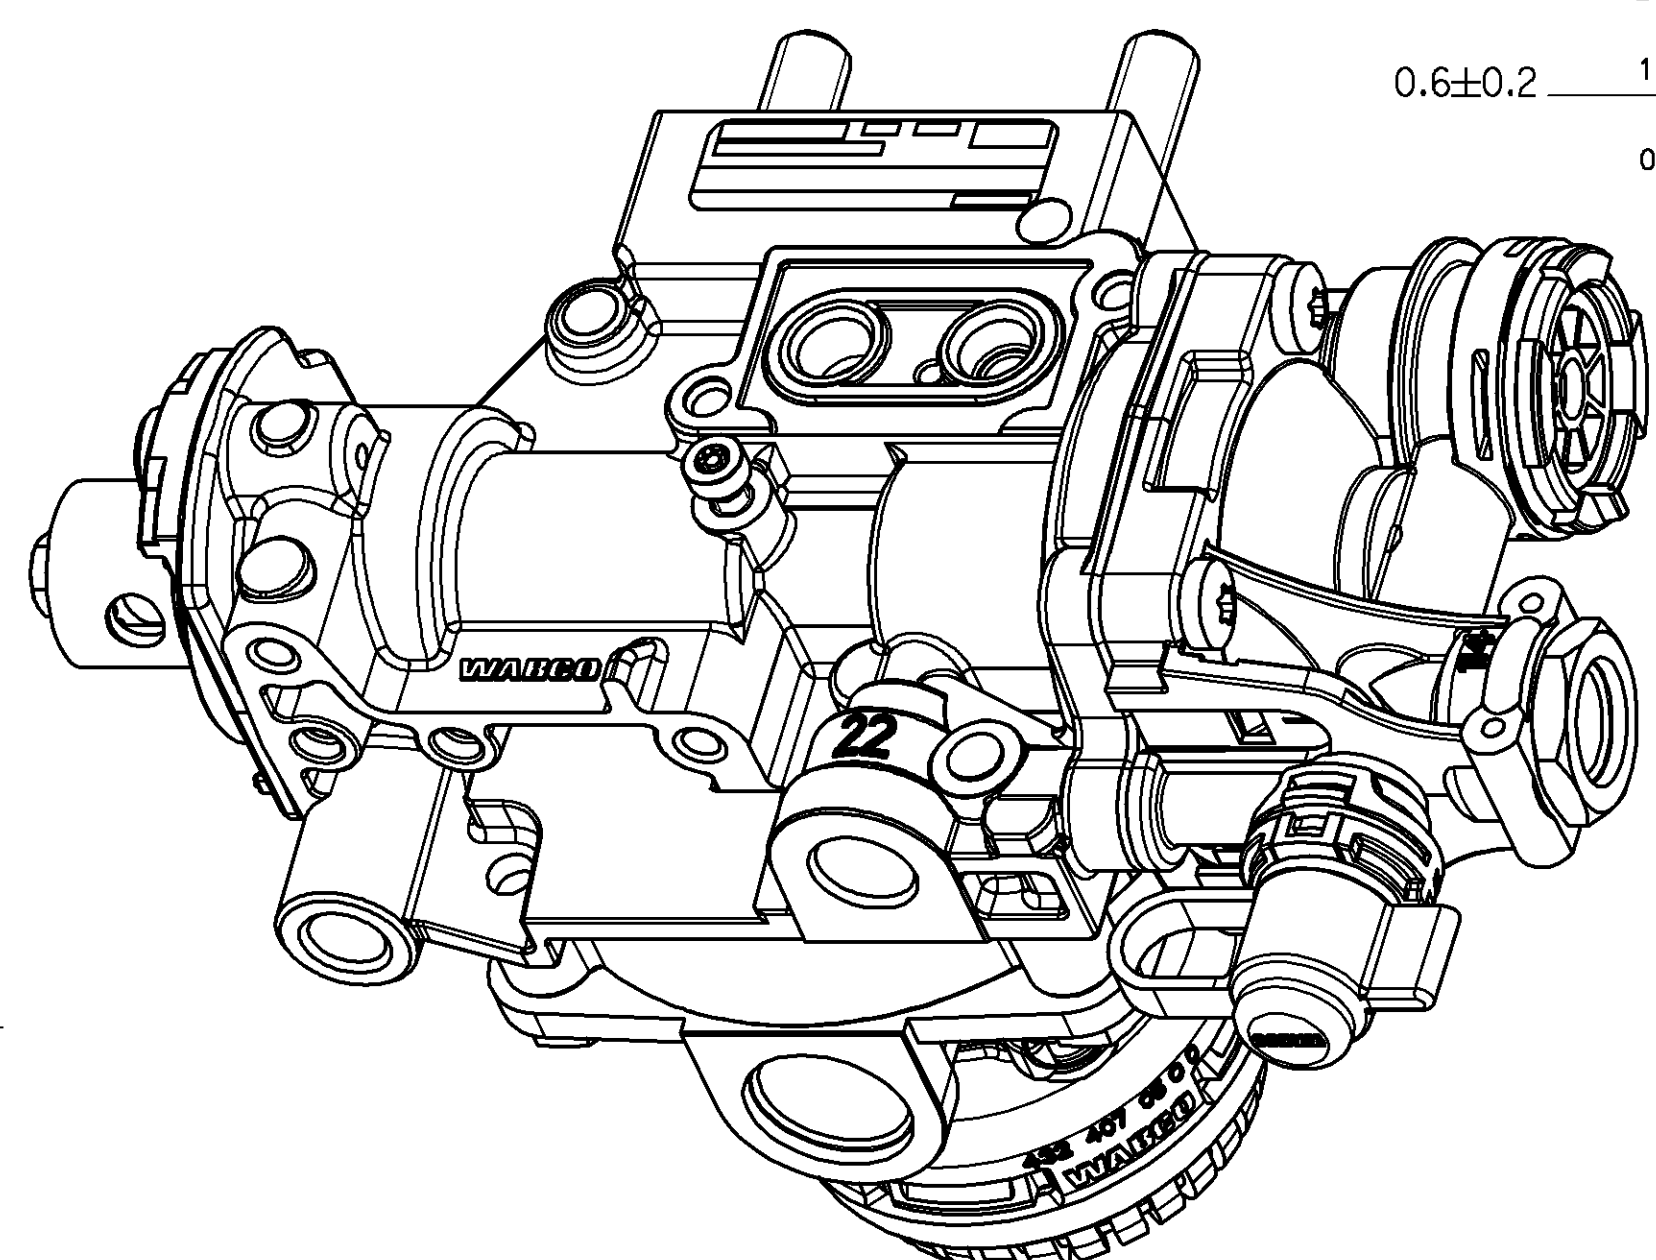


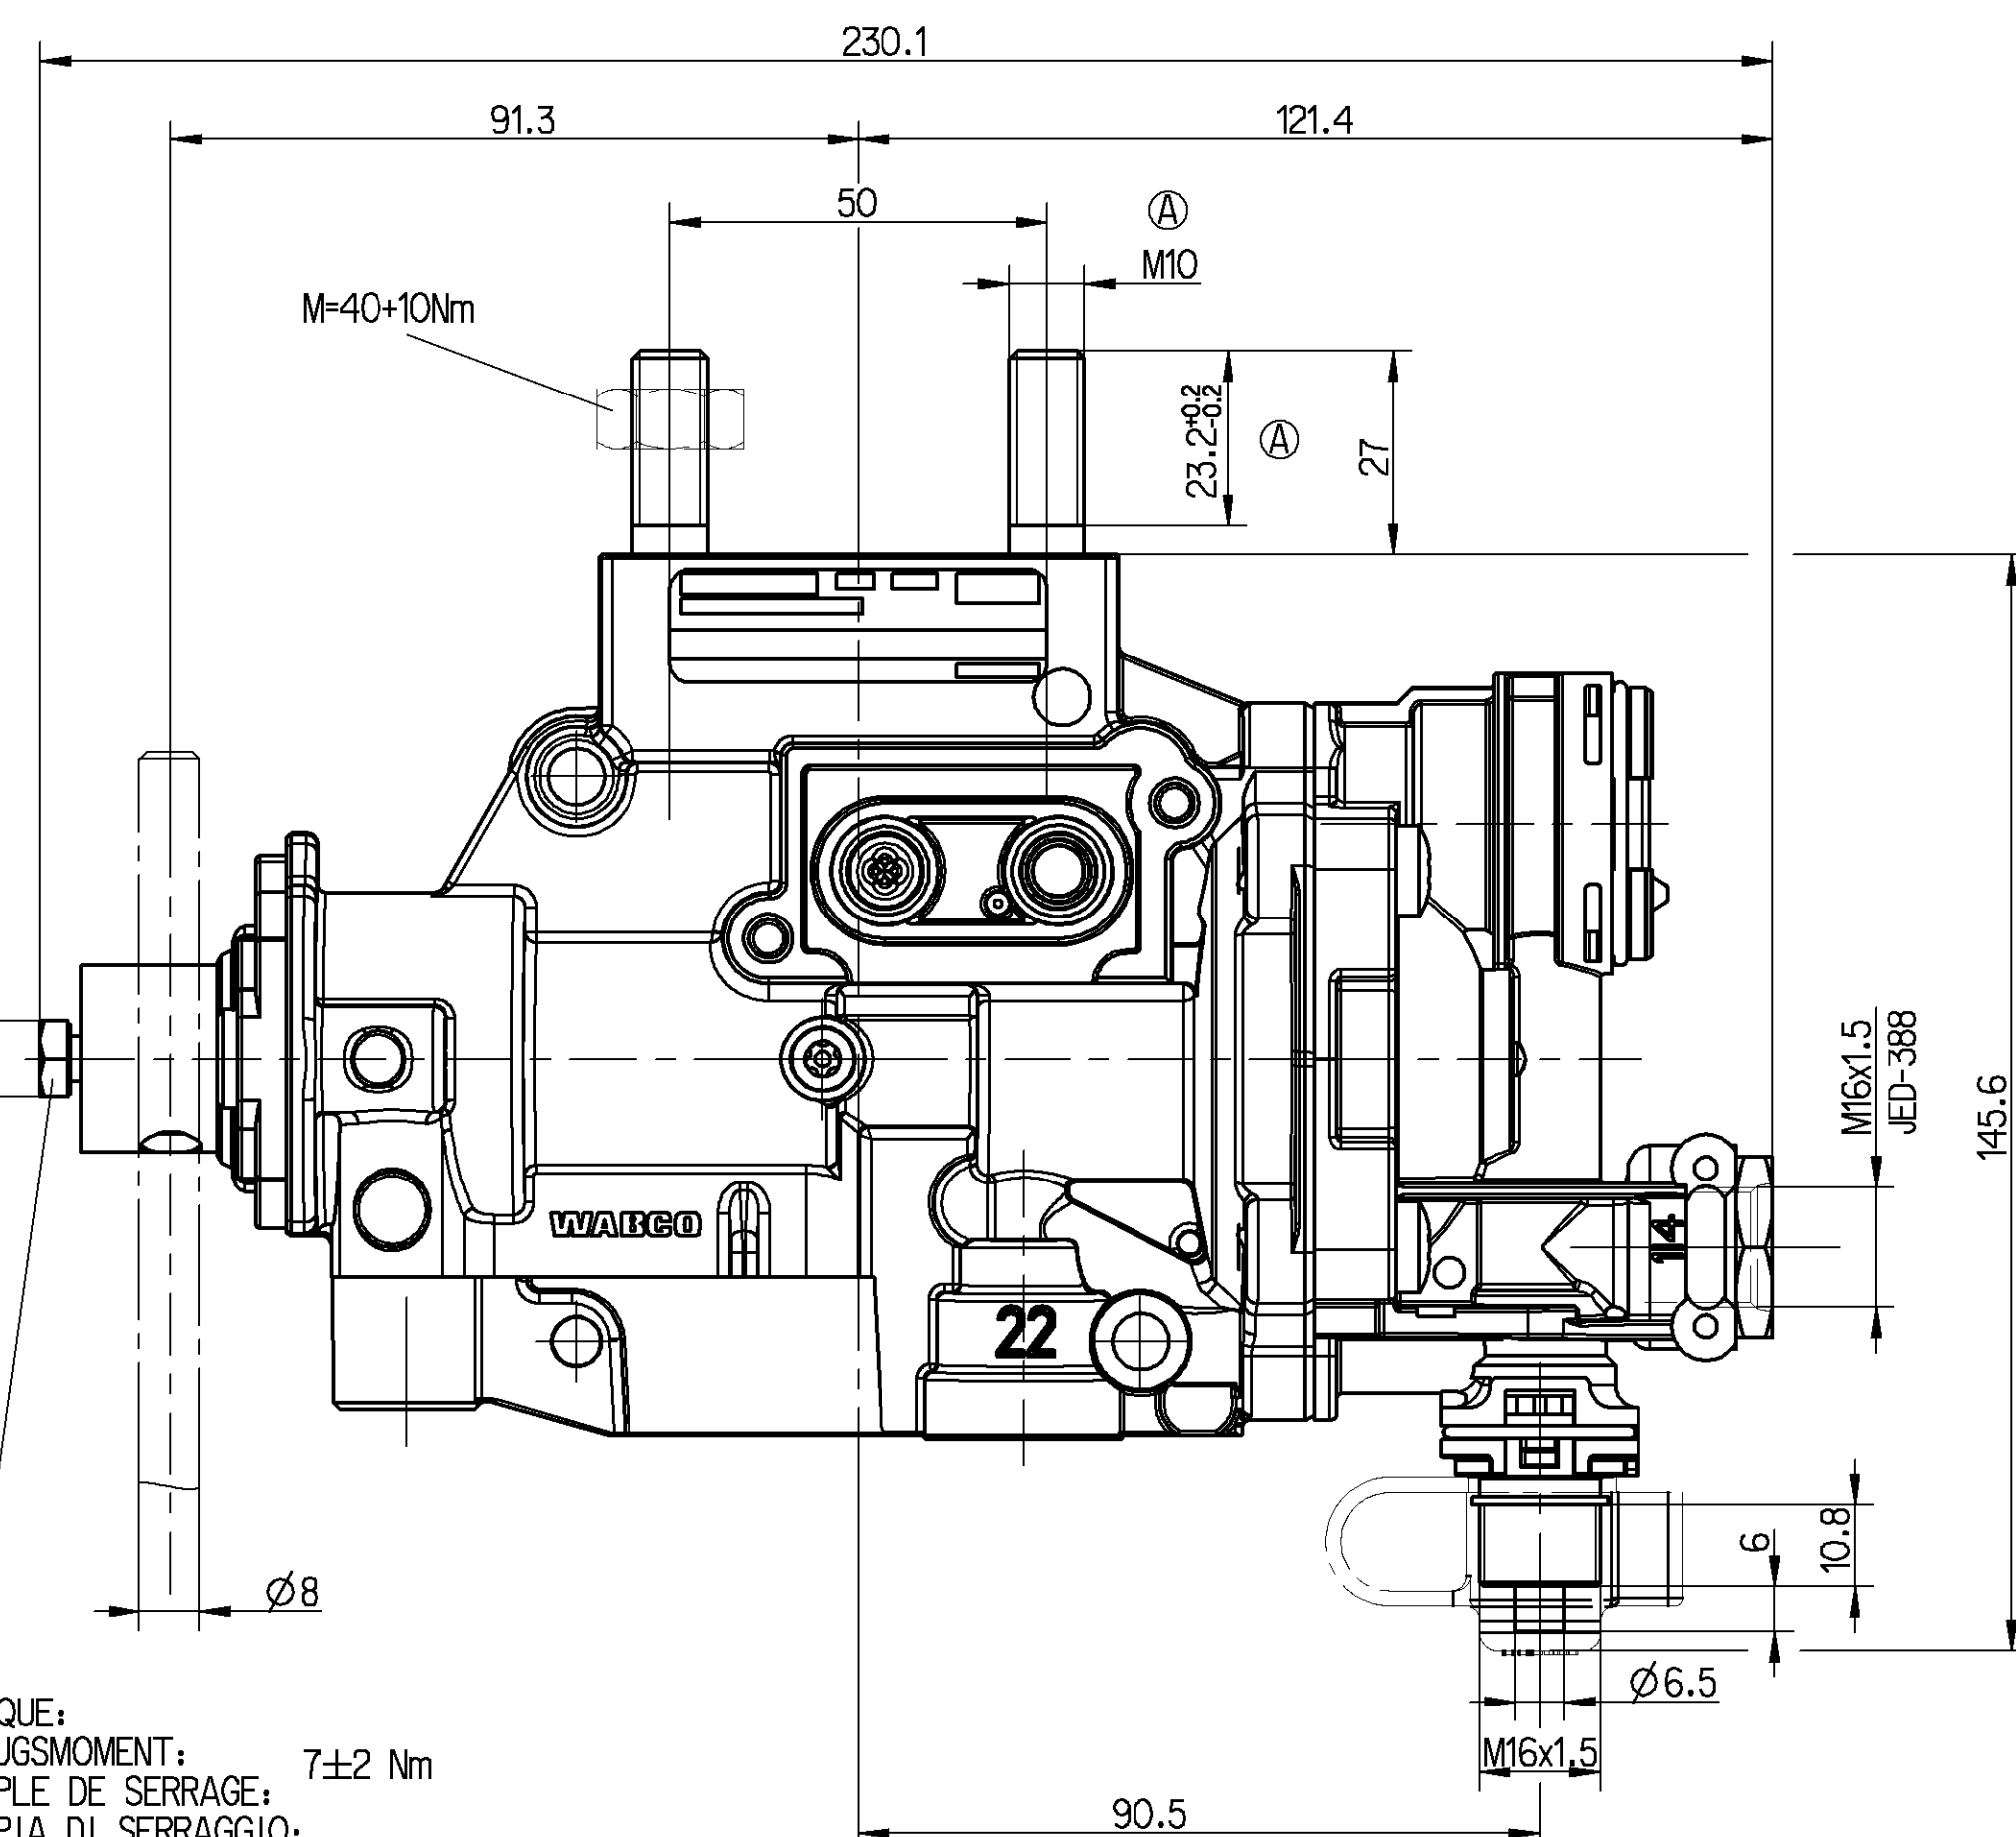

TORQUE FOR CONNECTIONS:
ANZUGSMOMENT FUER EINSCHRAUBSTUTZEN: M16 x 1.5 : Mmax. = 34 Nm
COUPLE DE SERRAGE DES RACCORDS: M22 x 1.5 : Mmax. = 53 Nm
COUPLE DI SERRAGGIO DEI RACCORDI.

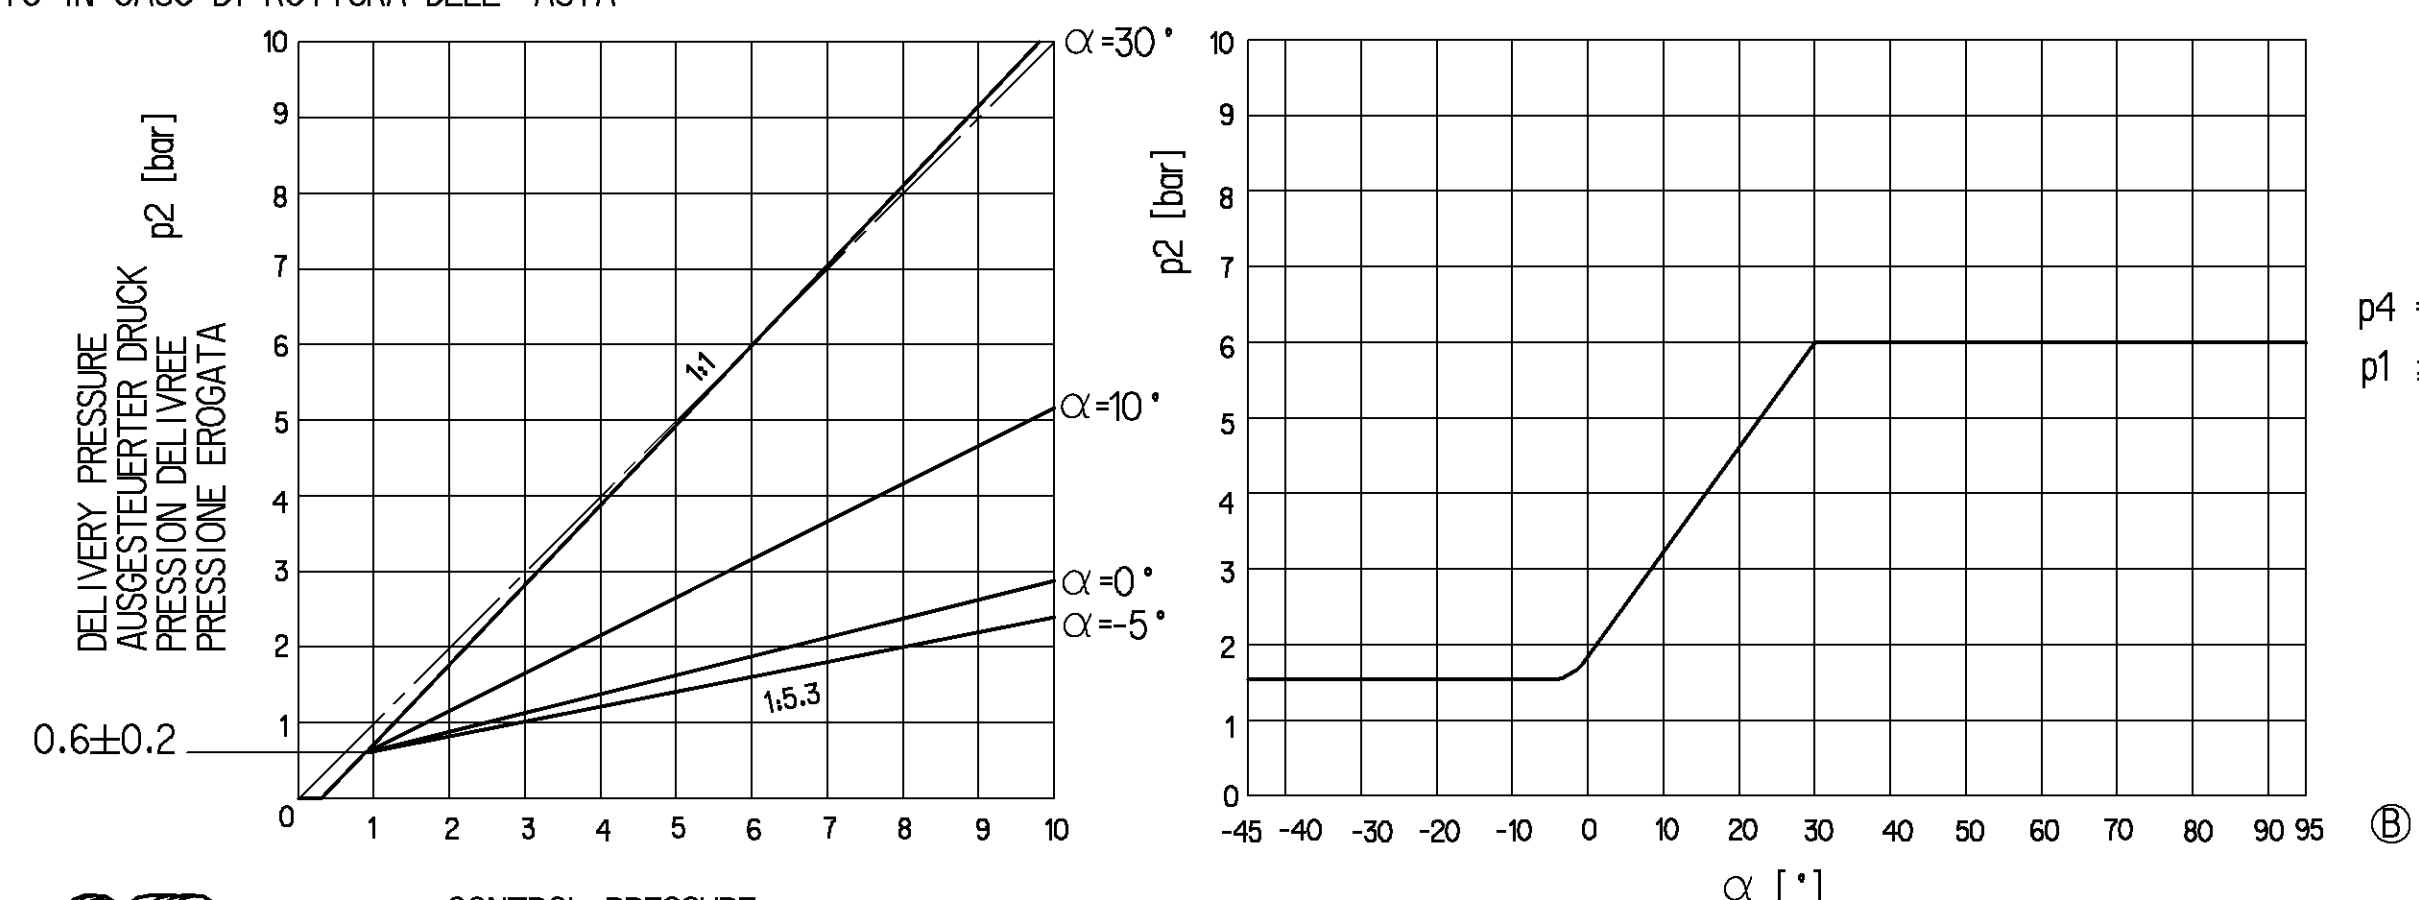

GENERAL SPECIFICATION:				JED-334-0								Pro/ENGINEER DRAWING COPYRIGHT				WABCO AUTOM.LOAD-SENSING VALVE AUTOM.BREMSKRAFTREGLER CORRECTEUR DE FREINAGE AUTOM. REGOLATORE DI FREINATURA AUTOM.							
FURTHER TECHNICAL DATA:												DATE								SIGNATURE			
DOC. CODE:				SHEET:				TO				99-10-13								DRAWN			
GENERAL TOLERANCES												CHECKED								ELZE			
RANGE OF NOMINAL DIMENSIONS (± mm)																FAUCK							
CLASS 1)		≤ 50		> 50		> 180		> 400						EXPERT CODE									
FINE		0.5		1.0		1.5		2.0						742									
MEDIUM		1.0		2.0		3.0		4.0						MASS									
COARSE		X 2.0		3.5		5.0		6.5						SCALE									
TAPPED HOLES ACC. ISO 4039 / JED-388												1.4				1:1							
1) TOLERANCE CLASS APPLIED CROSSMARKED												Kg				PRODUCT IDENTIFICATION NO.							
084906 2x8 02-12-06												SIZE				475 720 004 0							
071979 8x4 00-03-09												Kg				DOC. CODE							
DCN-N. REV. DATE												TRI				SHEET							
												A I 140				605 I/I							
																REPLACEMENT FOR							
												FUNCTION CODE				SHAPE CODE							
												PRODUCT TYPE				0 0							
												☒											

[illegible]

Mdl.: 4757200040-----A10 0.54 Drw.: 4757200040-----605