
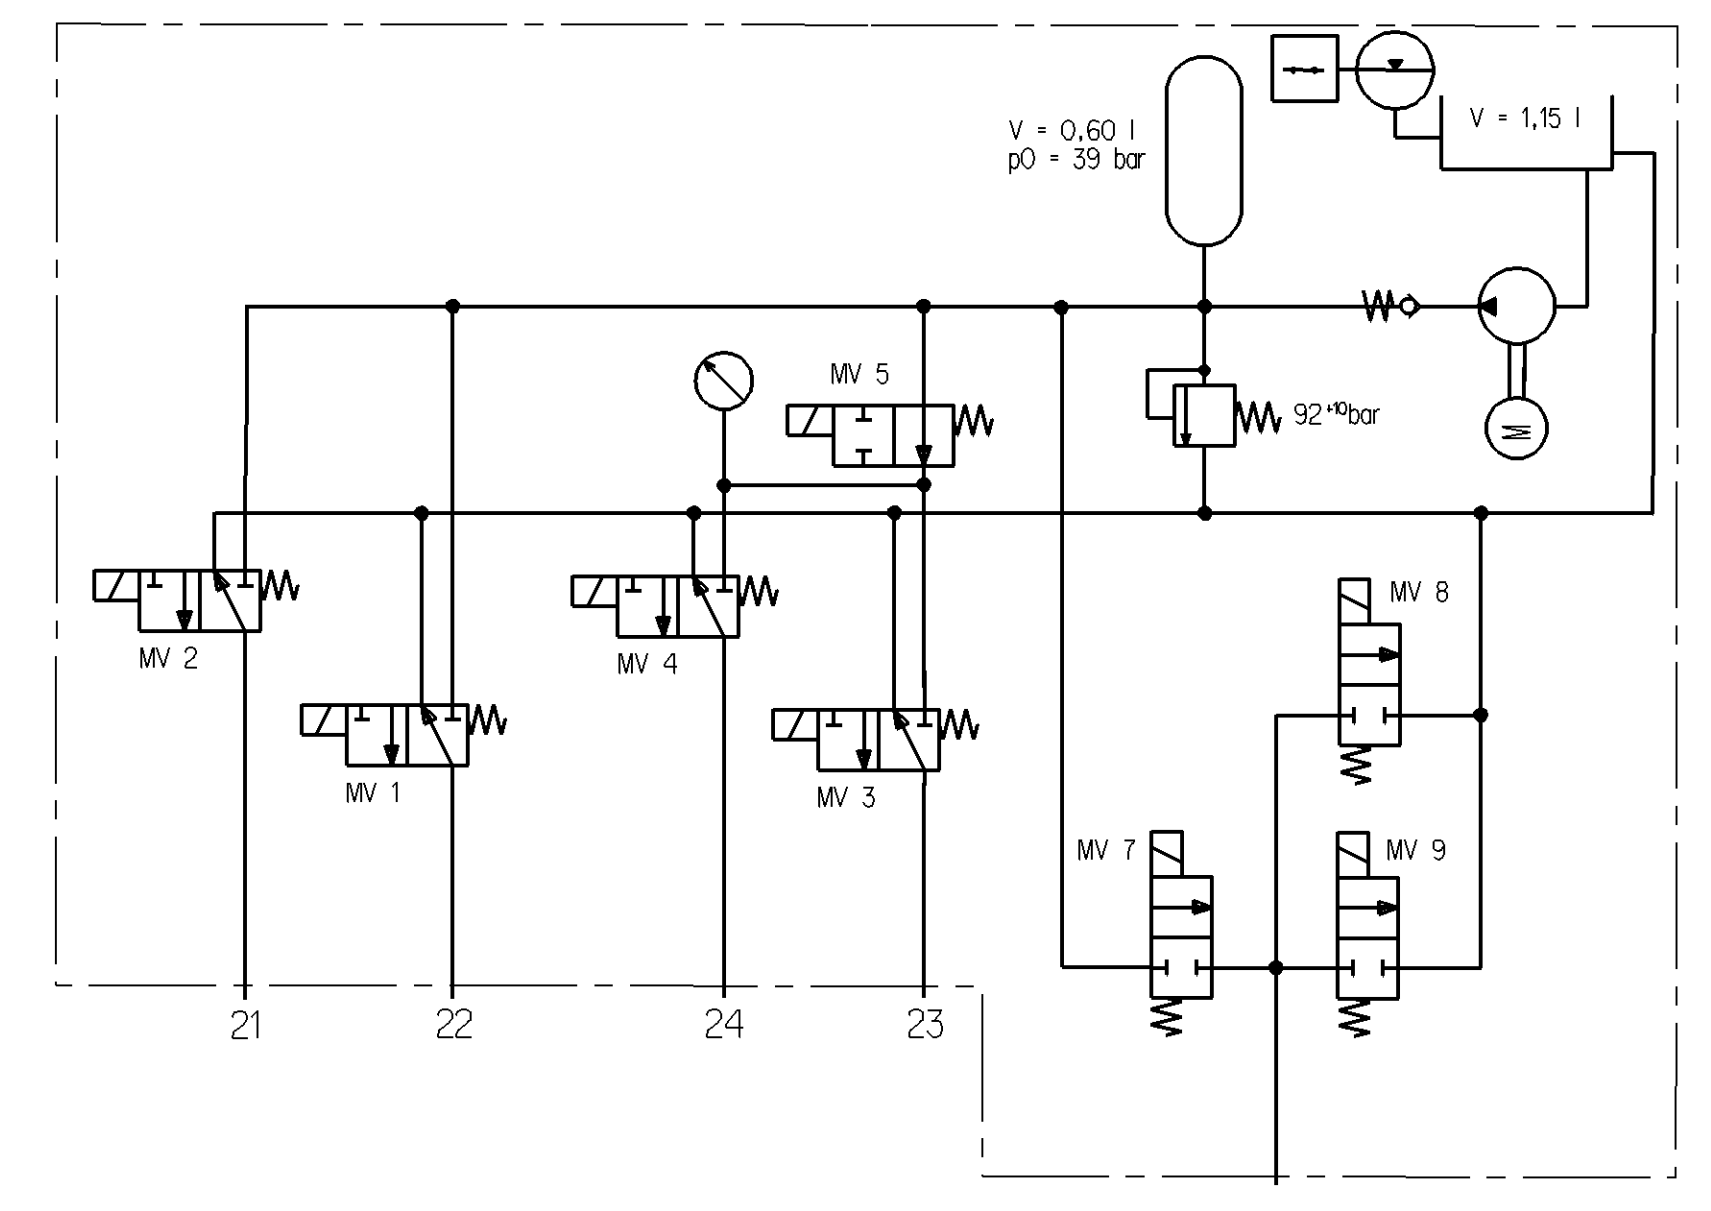
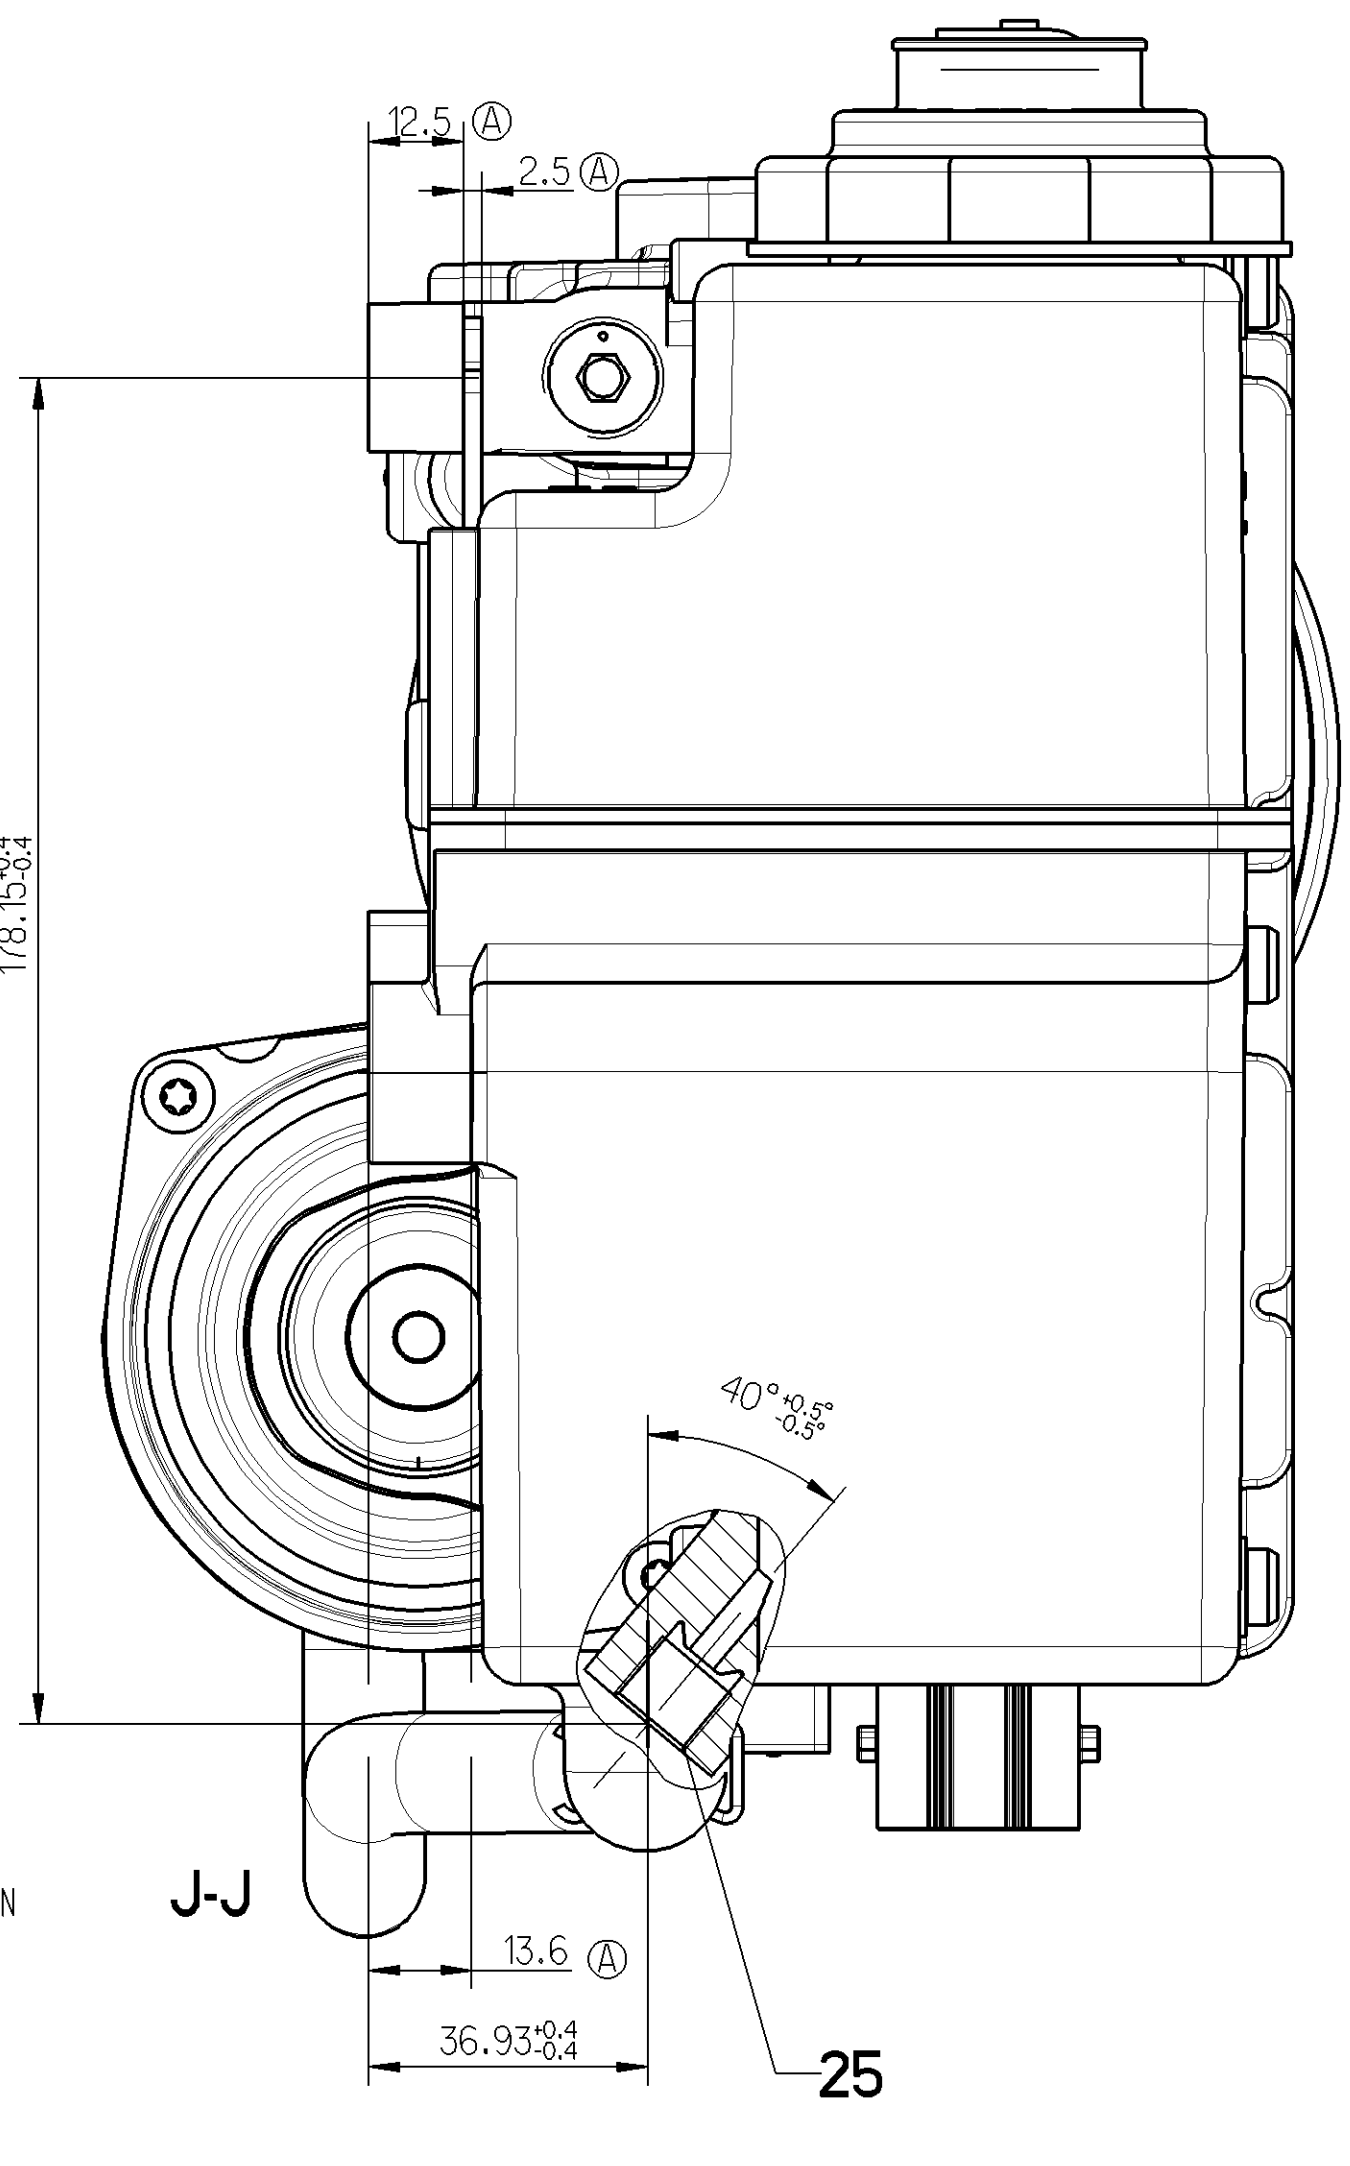
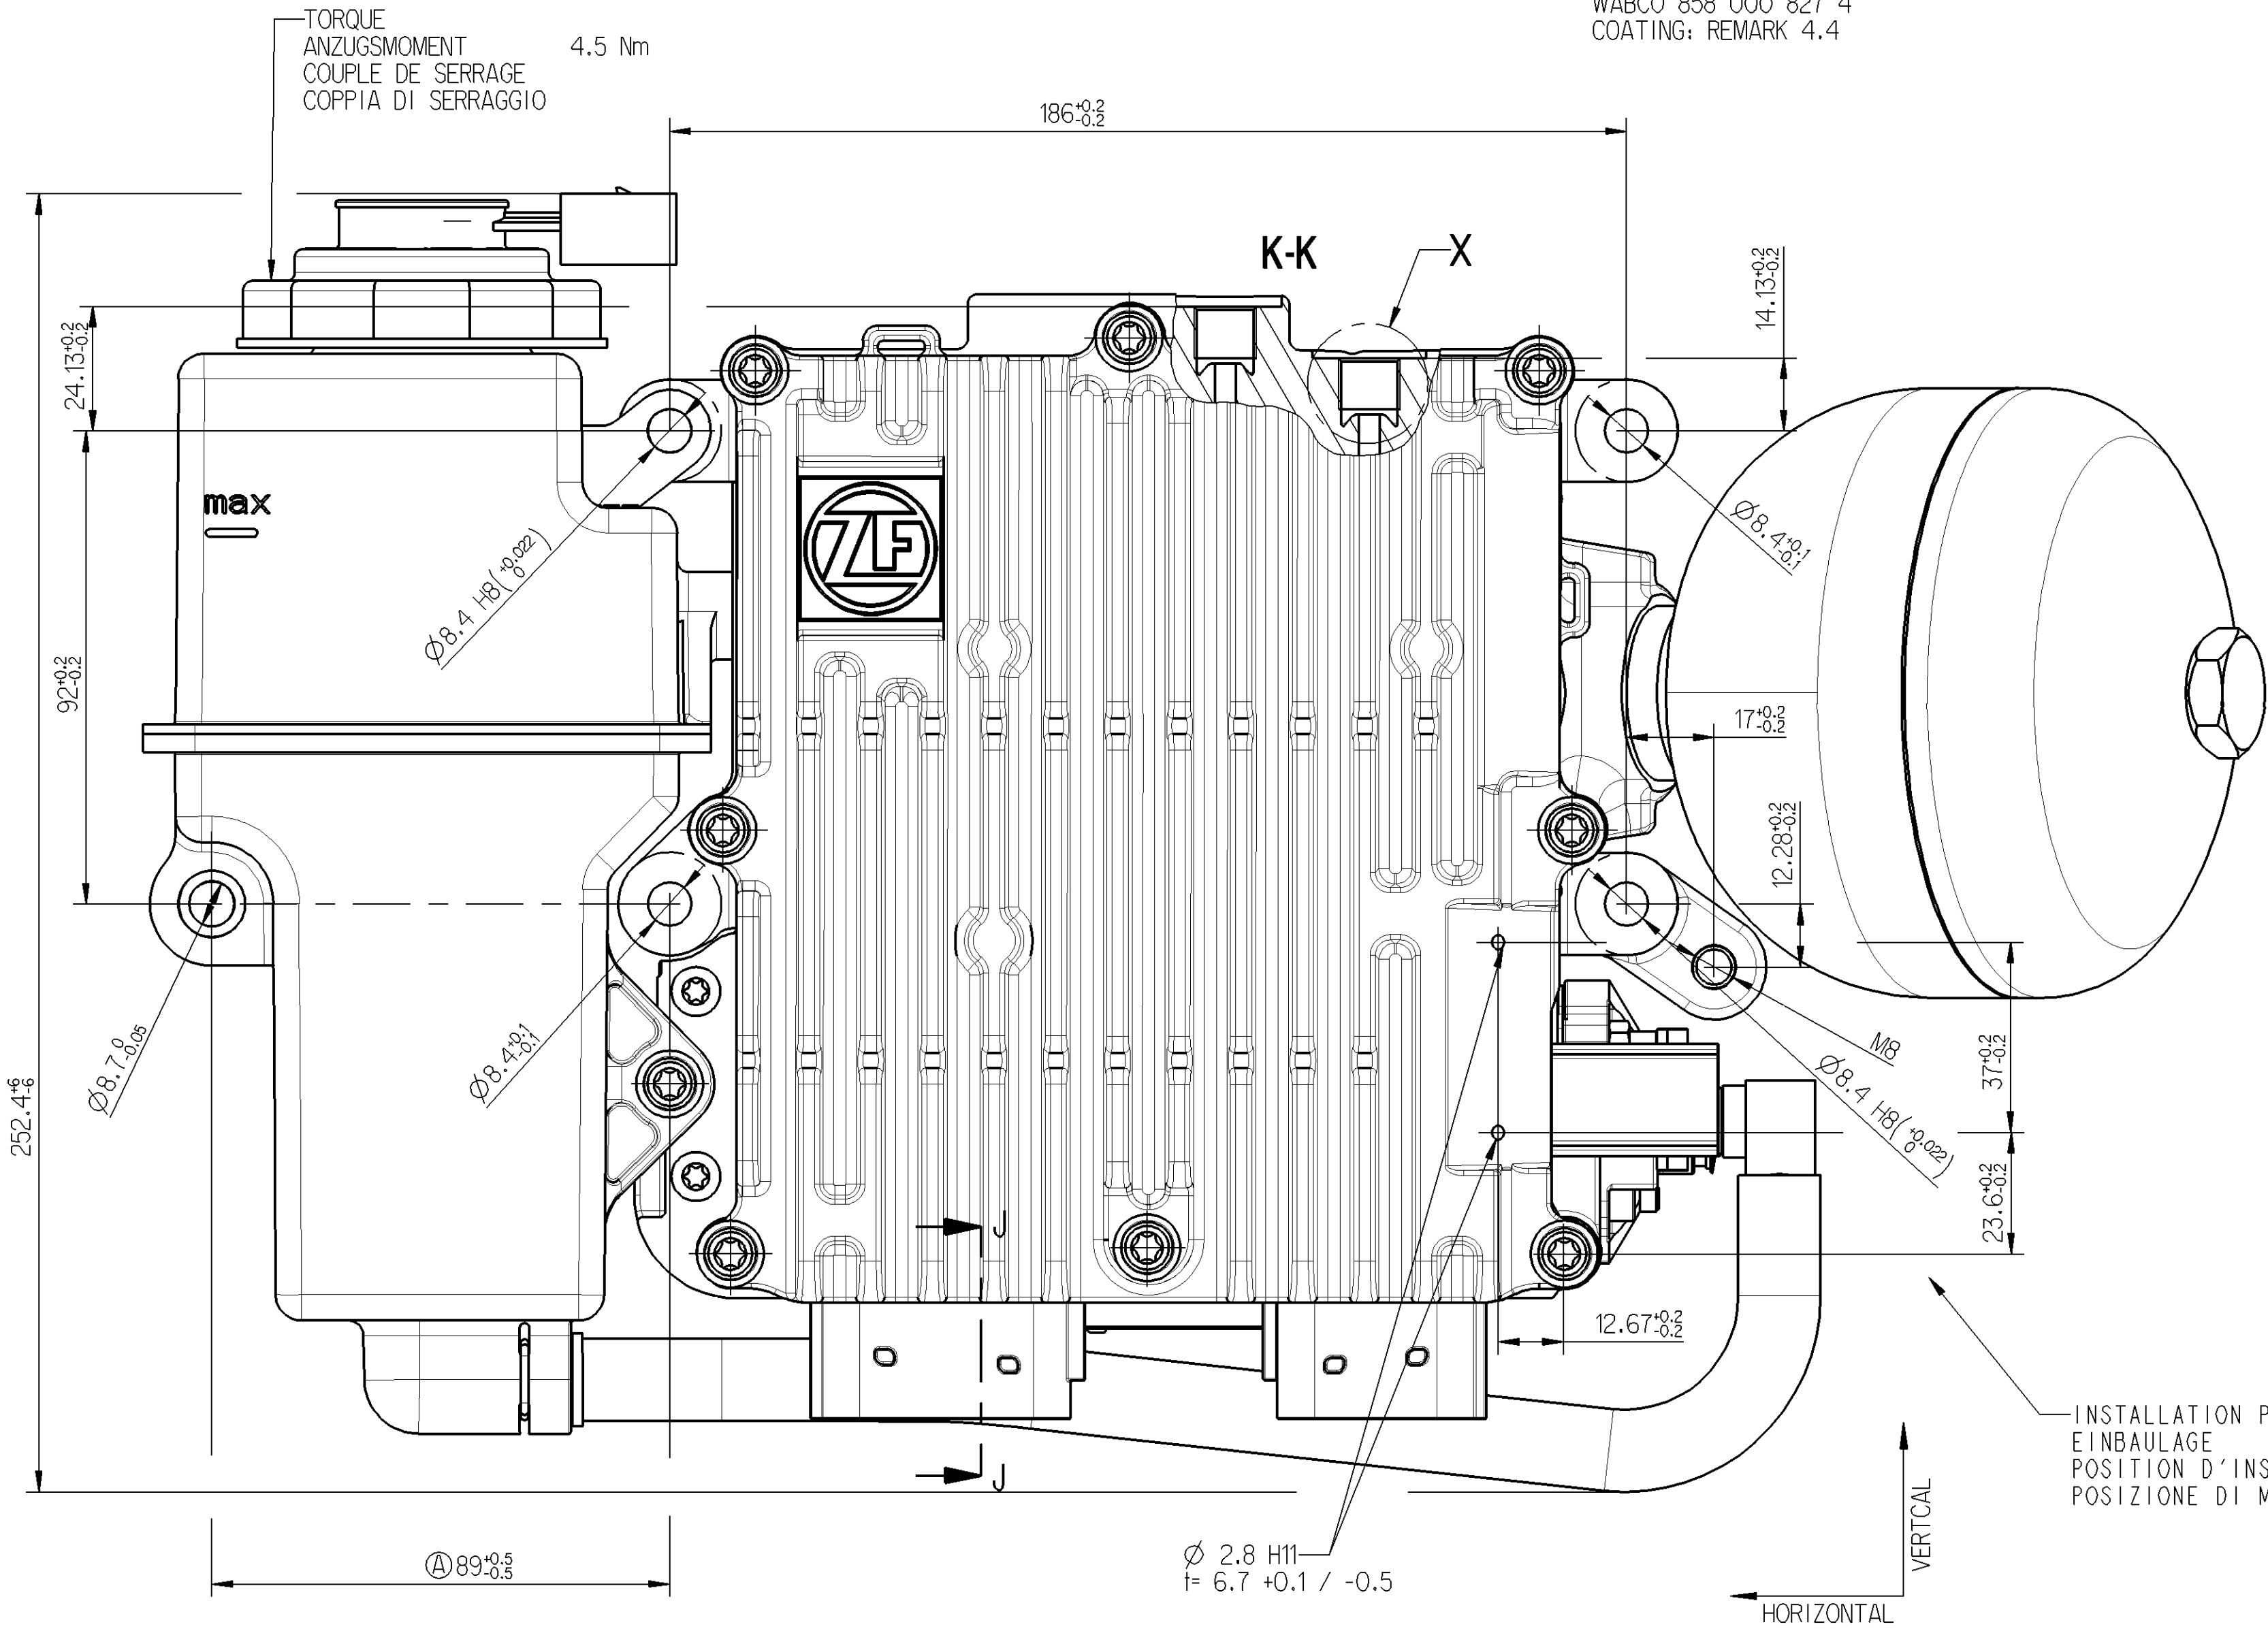
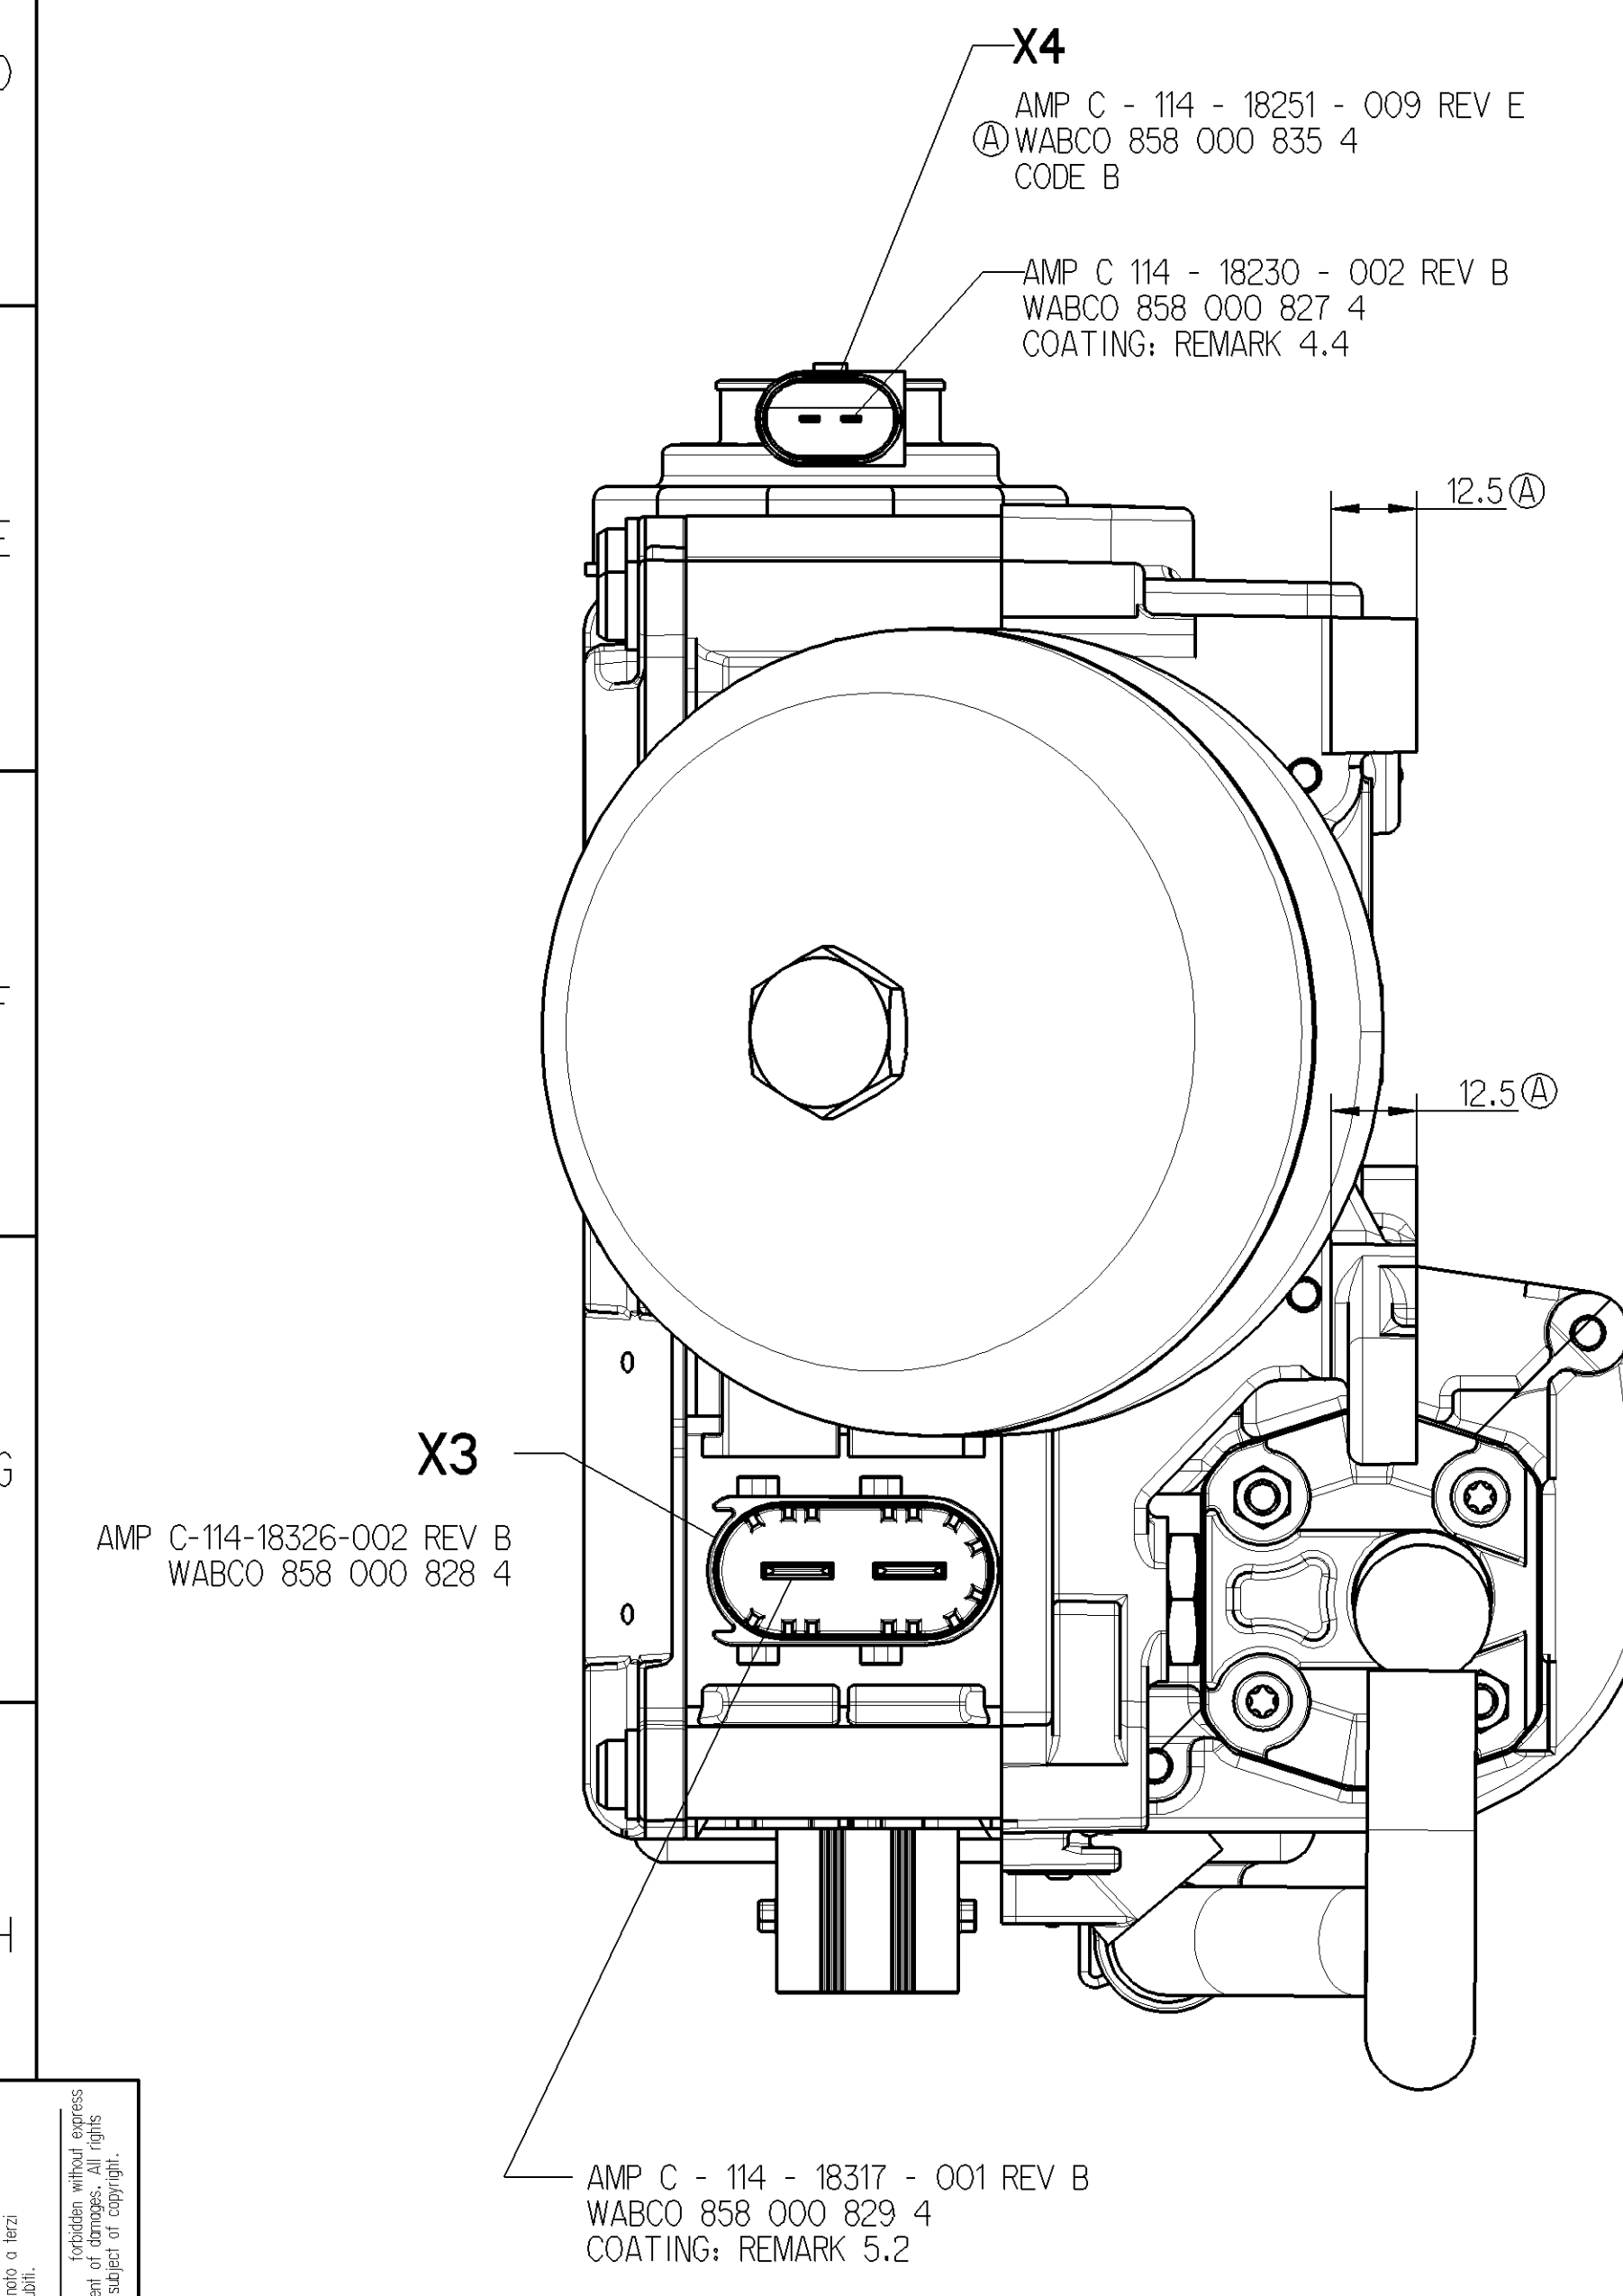
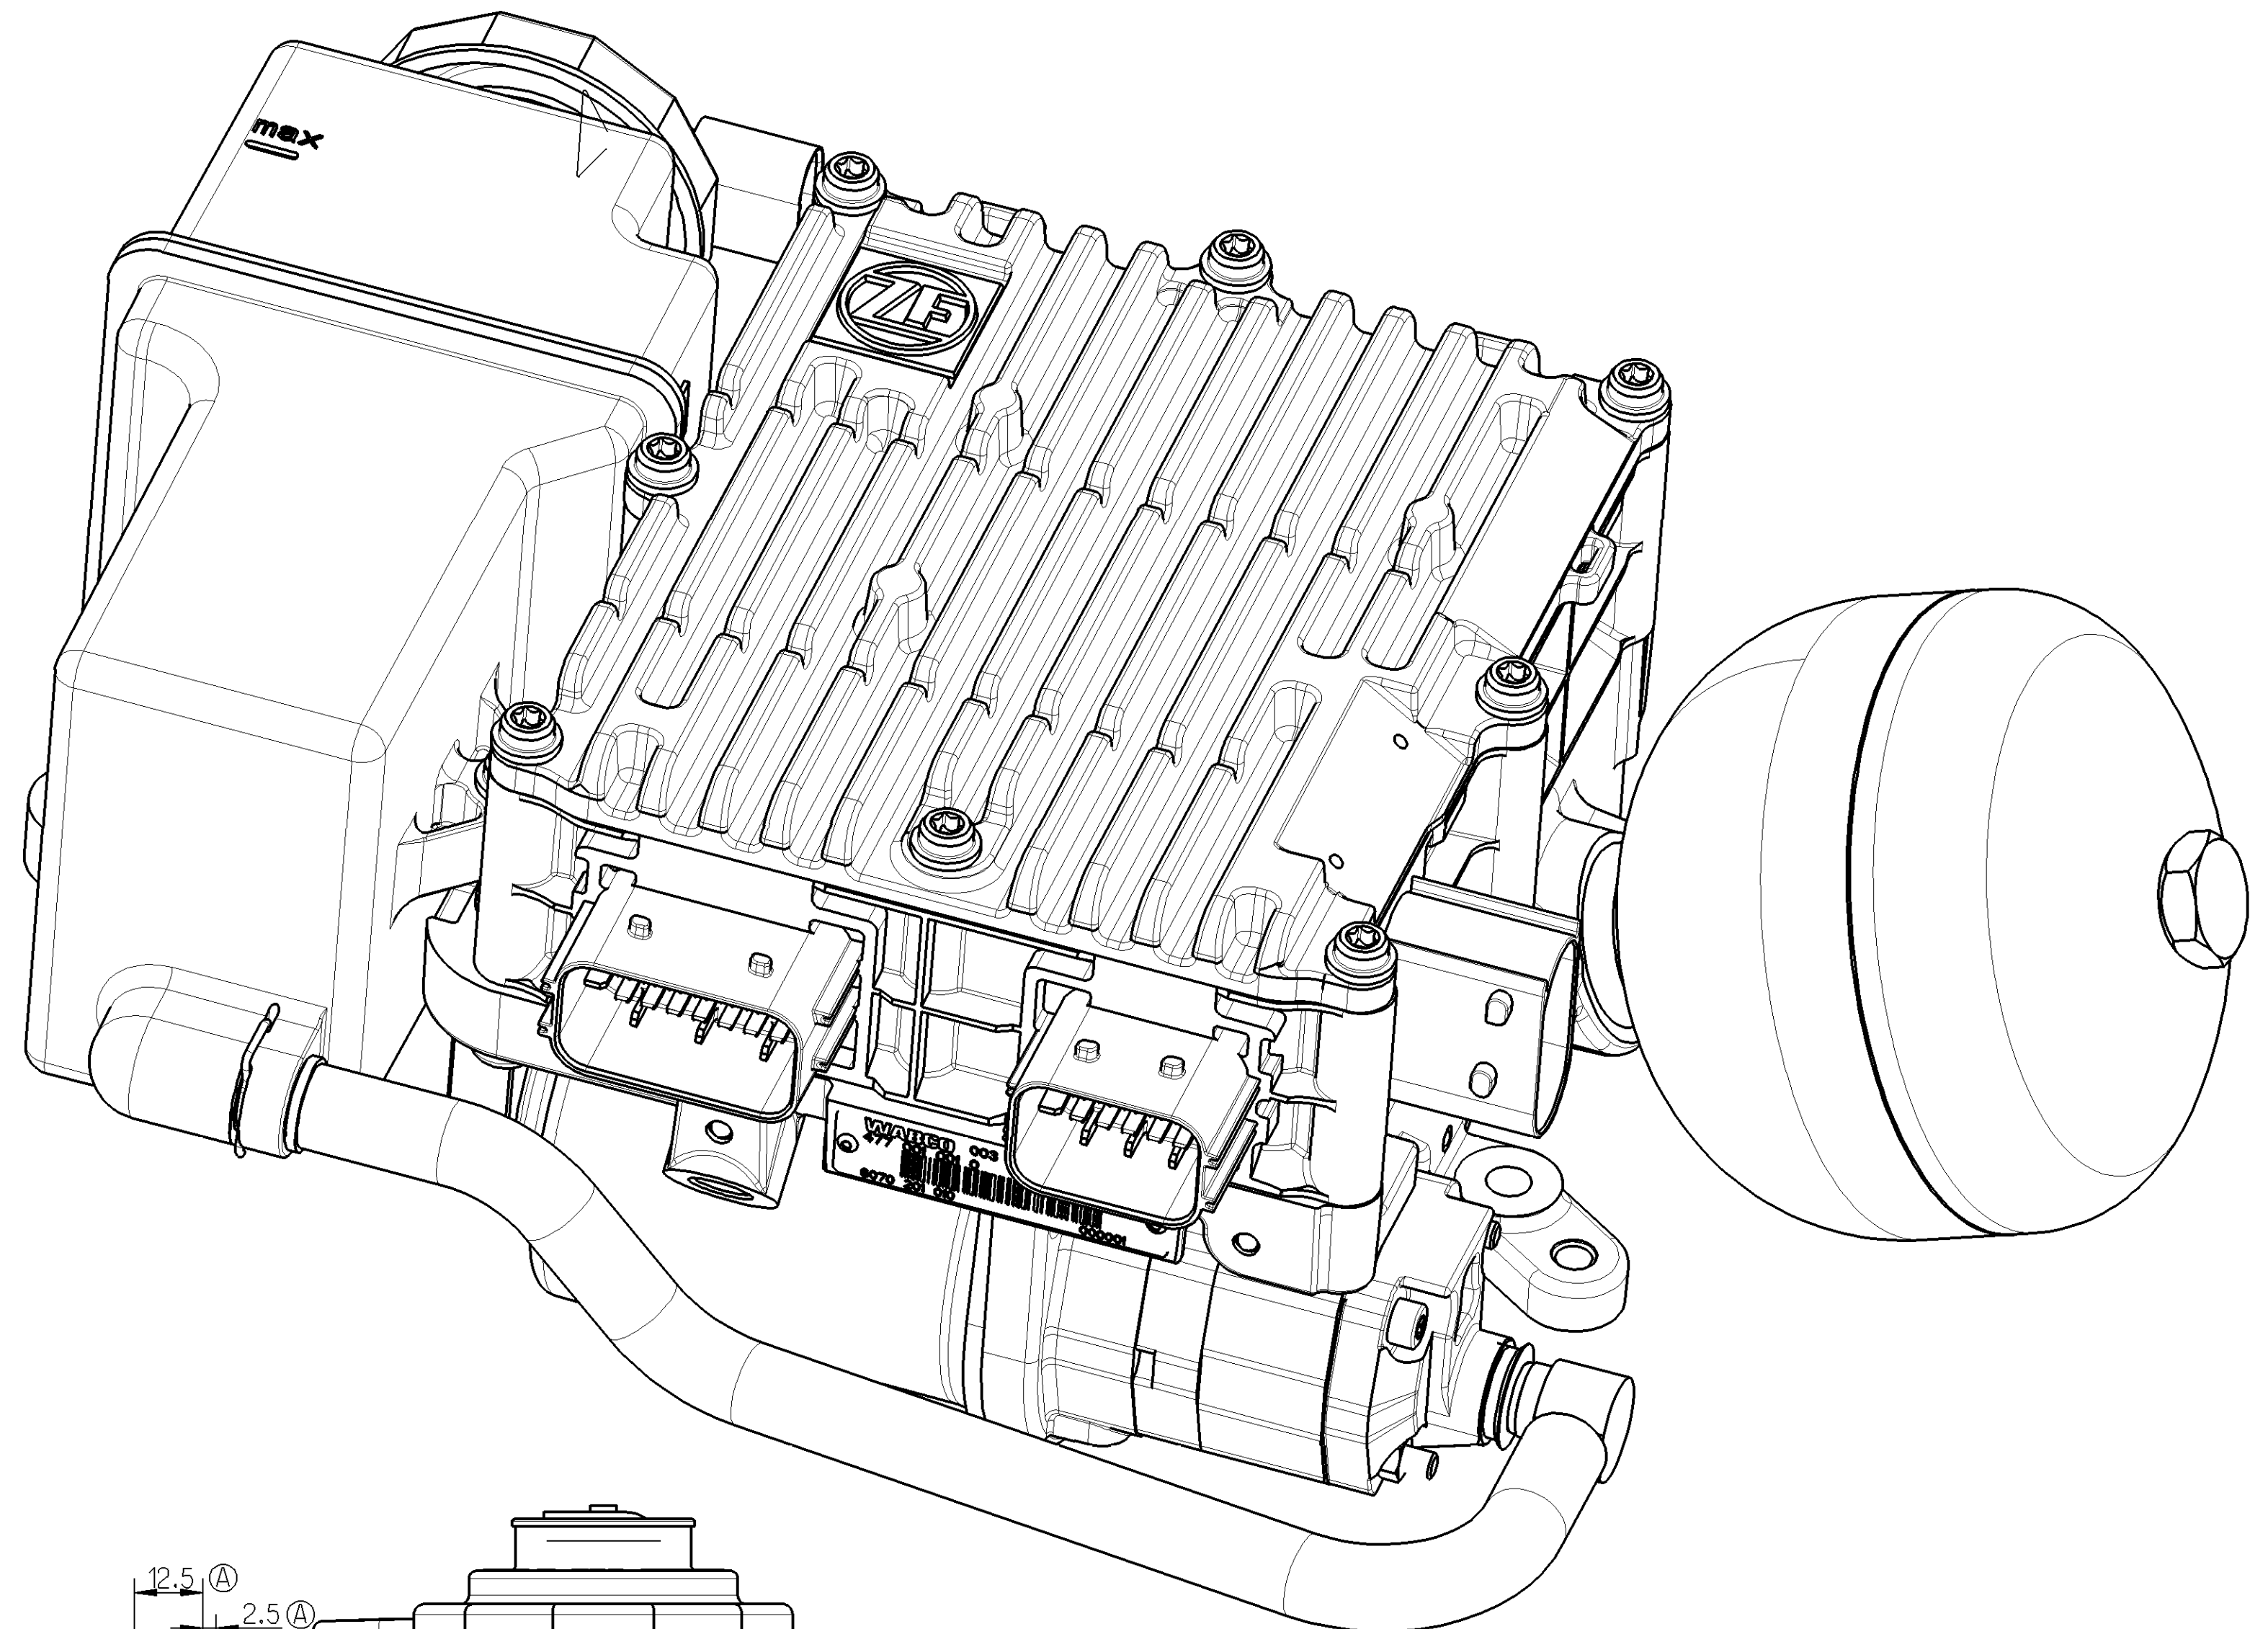


- 21 DISCHARGE PORT "RAIL 1/2"
DRUCKANSCHLUSS "GASSE 1/2"
REFOULEMENT "SELECTION 1/2"
ORIFIZIO DI MANDATA "RANGO 1/2"
- 22 DISCHARGE PORT "RAIL R"
DRUCKANSCHLUSS "GASSE R"
REFOULEMENT "SELECTION R"
ORIFIZIO DI MANDATA "RANGO R"
- 23 DISCHARGE PORT "GEAR R/2/4/6"
DRUCKANSCHLUSS "GANG R/2/4/6"
REFOULEMENT "PASSAGE R/2/4/6"
ORIFIZIO DI MANDATA "MARCIA R/2/4/6"
- 24 DISCHARGE PORT "GEAR 1/3/5"
DRUCKANSCHLUSS "GANG 1/3/5"
REFOULEMENT "PASSAGE 1/3/5"
ORIFIZIO DI MANDATA "MARCIA 1/3/5"
- 25 DISCHARGE PORT "CLUTCH"
DRUCKANSCHLUSS "KUPPLUNG"
REFOULEMENT "EMBRAYAGE"
ORIFIZIO DI MANDATA "FRIZIONE"

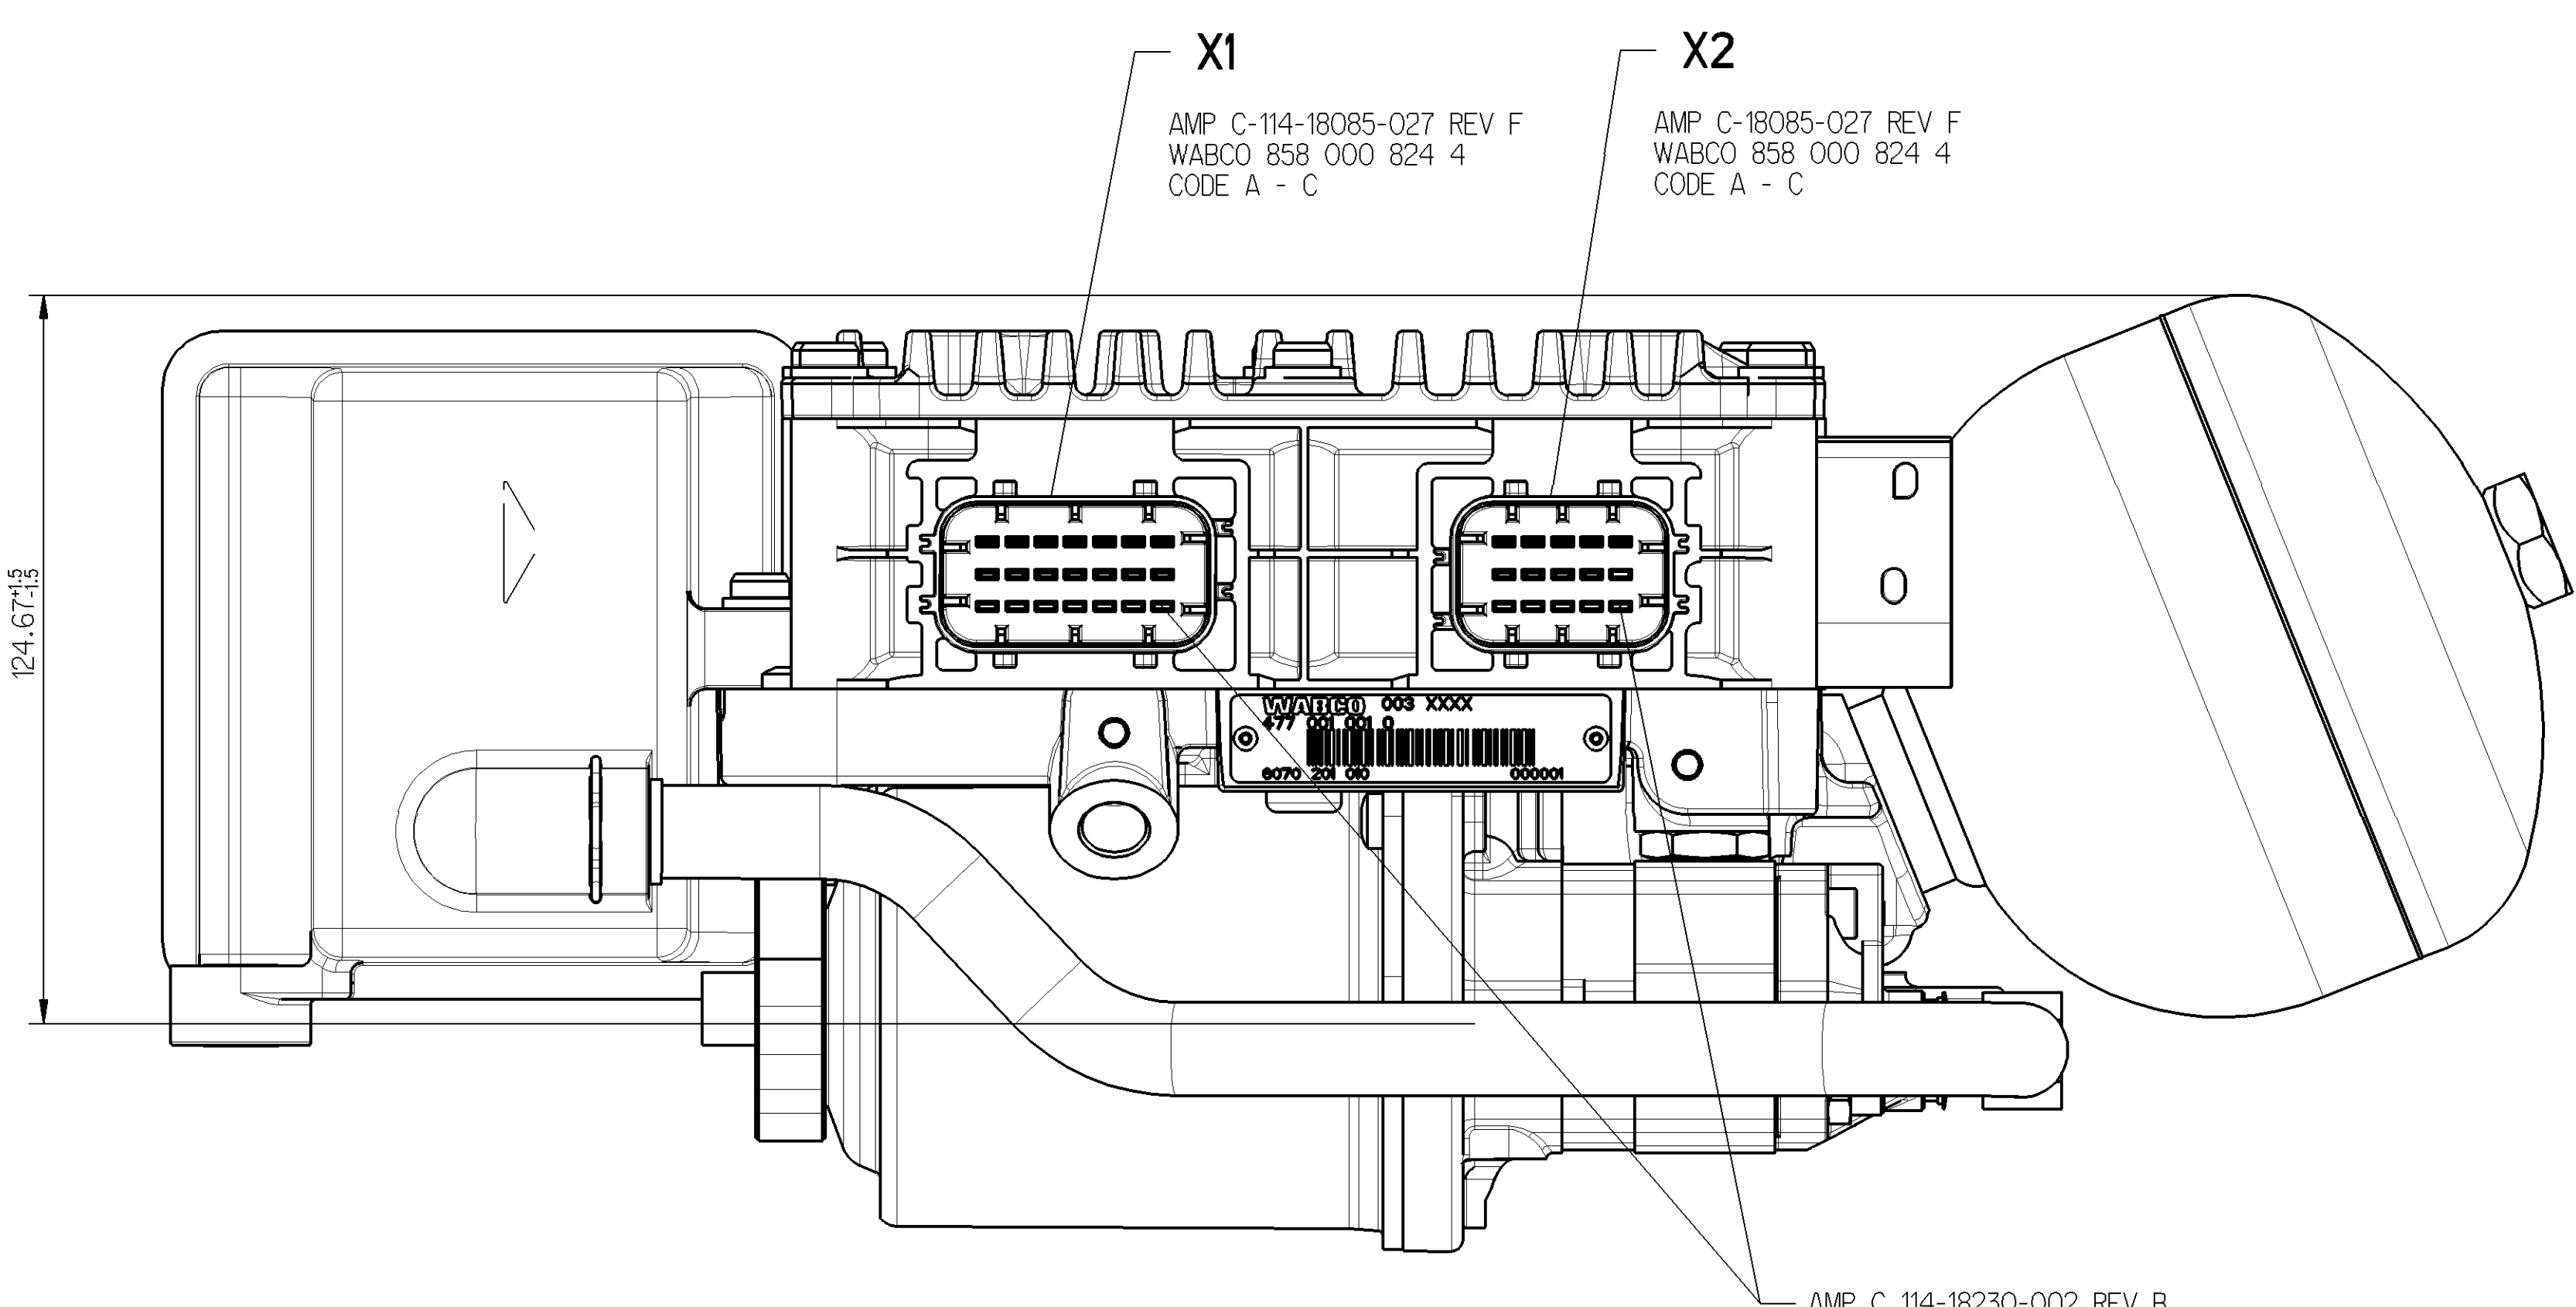

TECHNICAL DATA
TECHNISCHE DATEN
CARACTERISTIQUES TECHNIQUES
CARATTERISTICHE TECNICHE

WORKING MEDIUM
BETRIEBSMEDIUM
FLUIDE DE UTILISATION
FLUIDO DI ESERCIZIO

WORKING PRESSURE
BETRIEBSDRUCK
PRESSION DE UTILISATION
PRESSIONE DI ESERCIZIO

WORKING PRESSURE MAX.
MAX. BETRIEBSDRUCK
PRESSION DE UTILISATION MAX.
PRESSIONE DI ESERCIZIO MAX.

TERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
PLAGE DE TEMPERATURE EN UTILISATION
CAMPO TERMICO DI APPLICAZIONE

VOLTAGE
BETRIEBSSPANNUNG
TENSION
TENSIONE


INSTALLATION POSITION AS DRAWN
EINBAULAGE WIE GEZEICHNET
POSITION D'INSTALLATION SUIVANT DESSIN
POSIZIONE DI MONTAGGIO COME DISEGNATO

PVC PACKAGING NOT PERMISSIBLE
KEINE PVC VERPACKUNG ZULAESSIG
CPV EMBALLAGE NON AMMISS
CPV IMBALLAGGIO NON AMMESSA

AMBIENT MEDIUM:
UMGEBUNGSMEDIUM:
FLUIDE AMBIANT:
FLUIDO AMBIENT:


AIR (CONTAINING WATER, DUST AND OIL)
LUFT (WASSER-, STAUB UND ÖLHALTIG)
AIR (HUMIDE, HUILEUX, POUSSIEREUX)
ARIA (ACQUA, POLVERE ED OLIO INQUINATO)

- X1 CENTRAL CONNECTOR VEHICLE
ZENTRALSTECKER FAHRZEUG
CONNECTEUR CENTRAL VEHICULE
CONNETTORE CENTRALE VEICOLO
- X2 CENTRAL CONNECTOR GEARBOX
ZENTRALSTECKER GETRIEBE
CONNECTEUR CENTRAL VEHICULEBOITE DE VITESSES
CONNETTORE CENTRALE CAMBIO
- X3 CENTRAL CONNECTOR HIGH CURRENT
ZENTRALSTECKER HOCHSTROM
CONNECTEUR CENTRAL COURANT HAUT
CONNETTORE CENTRALE ALTA CORRENTE
- X4 CONNECTOR LEVEL SWITCH
STECKER NIVEAUSCHALTER
CONNECTEUR INTERUPTEUR DE NIVEAU
CONNETTORE INTERRUPTORE DI LIVELLO

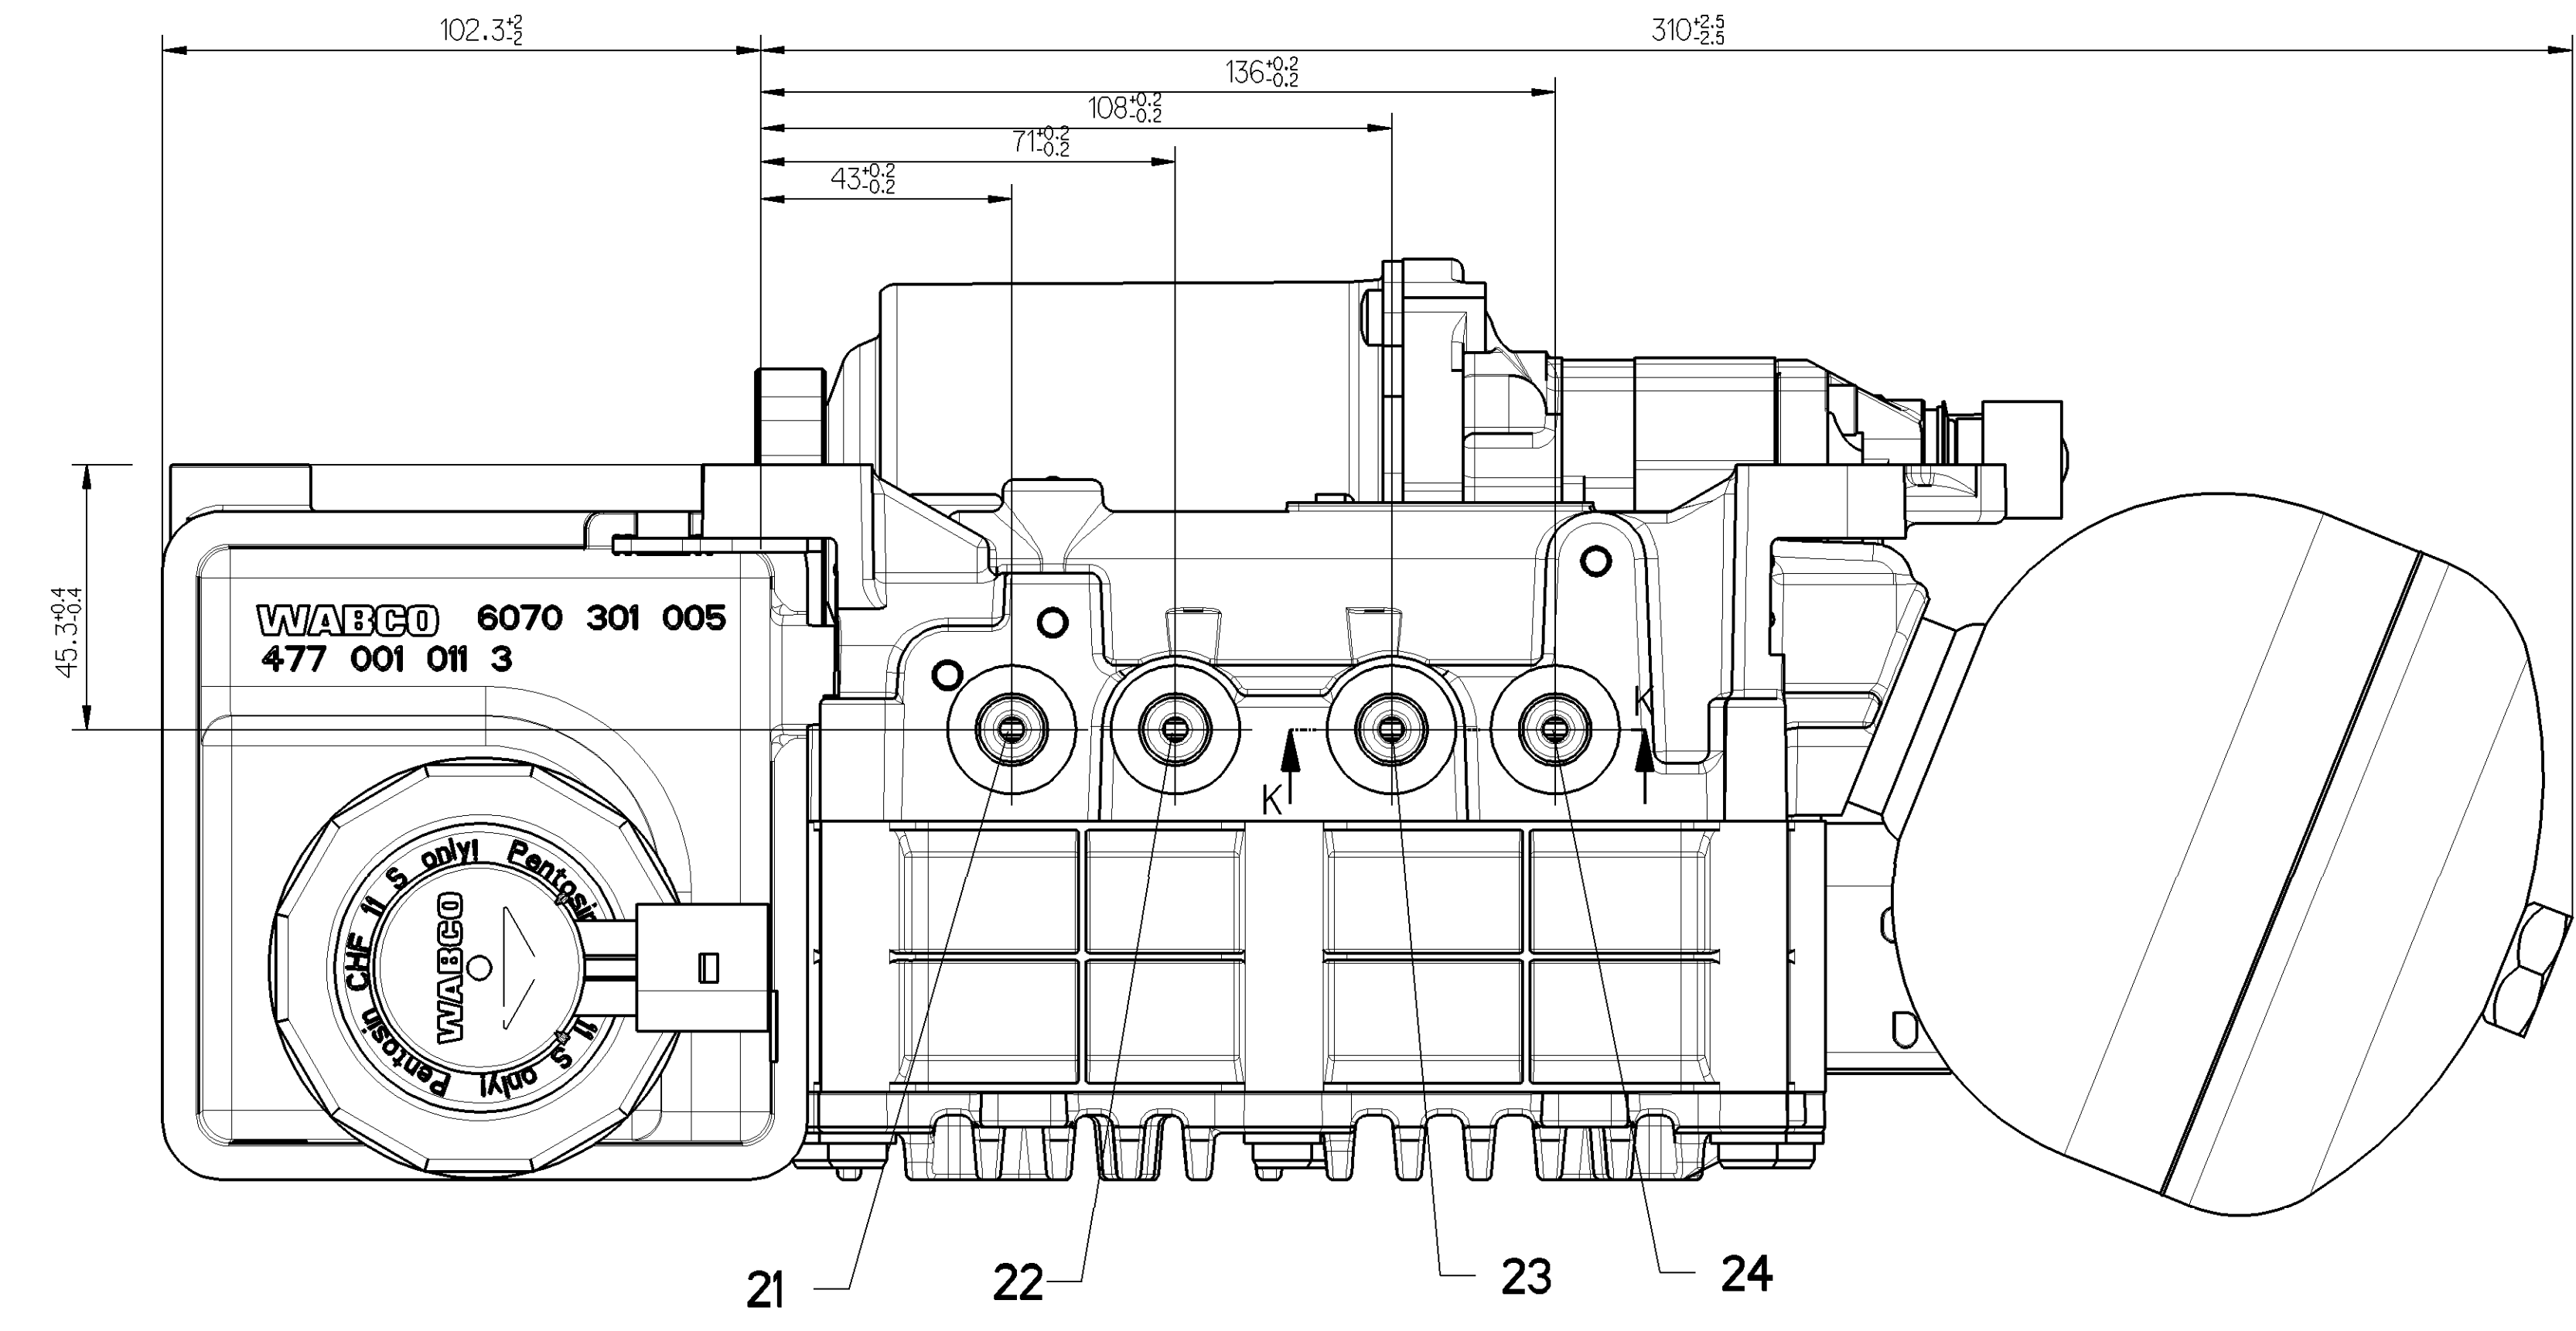


21, 22, 23, 24, 25

DIN 74235-EL M12x1 A

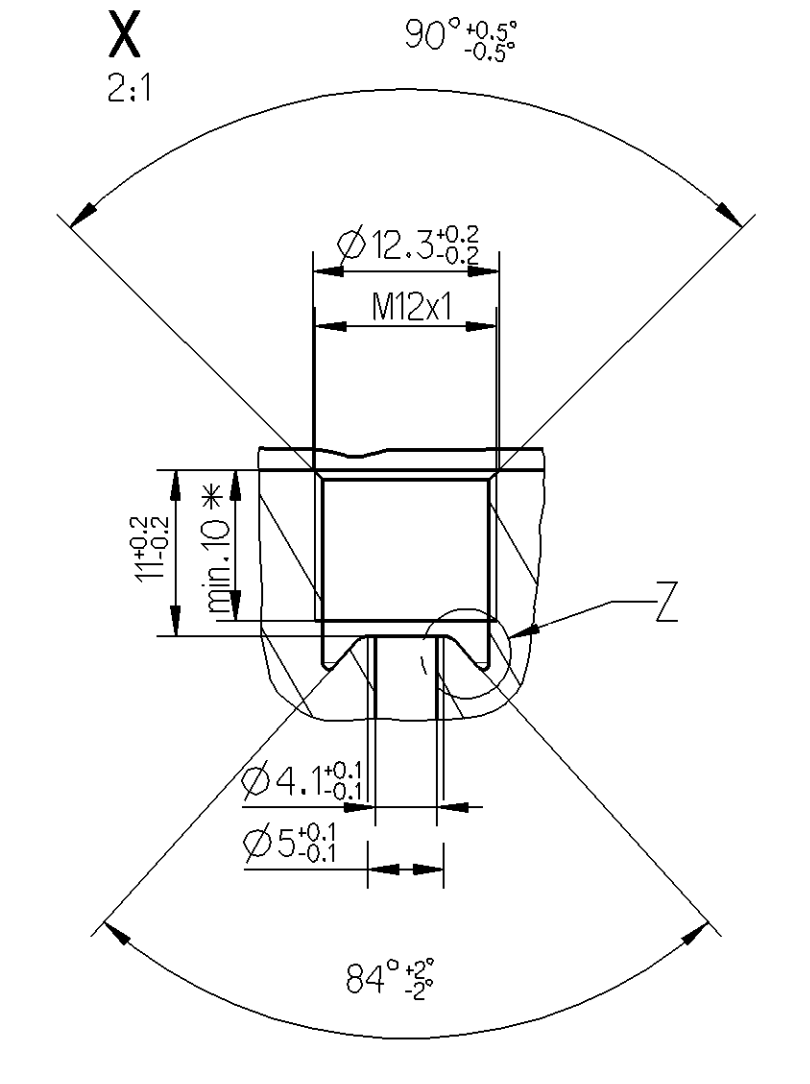

* DEVIATION FROM
ABWEICHUNG ZU
ÉCART
SCOSTAMENTO

DIN 74235-EL M12x1 A

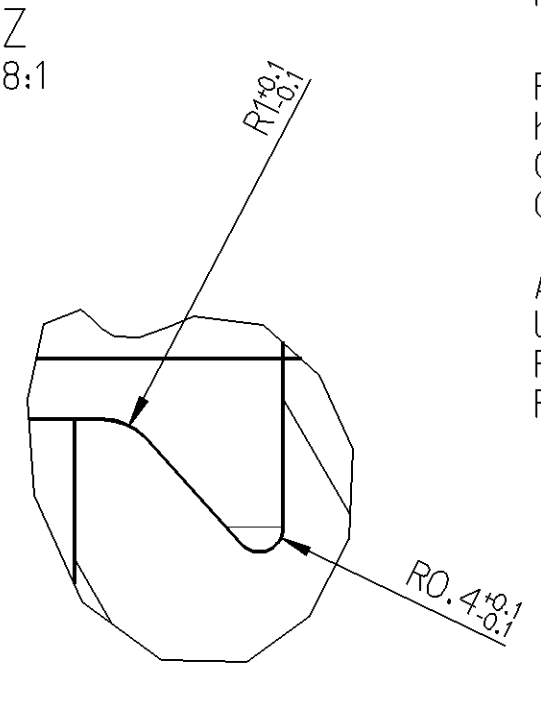

General Specification: 4E1-334-0				Copyright WABCO *			
Further Technical Data:				Date: 2006-05-24			
Doc. Code:				Signature: Kabe			
General Tolerances: 4E1-261				2006-05-24			
Range of Nominal Dimensions L ± mm				Kik			
Class 1) ± 50 > 180				Brammer			
2) ± 50 > 180 > 400				Brammer			
Class 1) 0.5 1.0 1.5 2.0				Mass			
Medium 1.0 2.0 3.0 4.0 ± 0.1				9.6			
Coarse 2.0 3.5 5.0 6.5				Size			
Coarse 2.0 3.5 5.0 6.5				TIT			
Trapped Water (cc)				A O 570			
Date of Revision				Tolerance Class Applied: Overmoulded			
Material				Function Code			
477 001 001 0				Pne			
WABCO 10.000.00000				Sheet			
605				1/1			
884 006 886 0				100mm			