

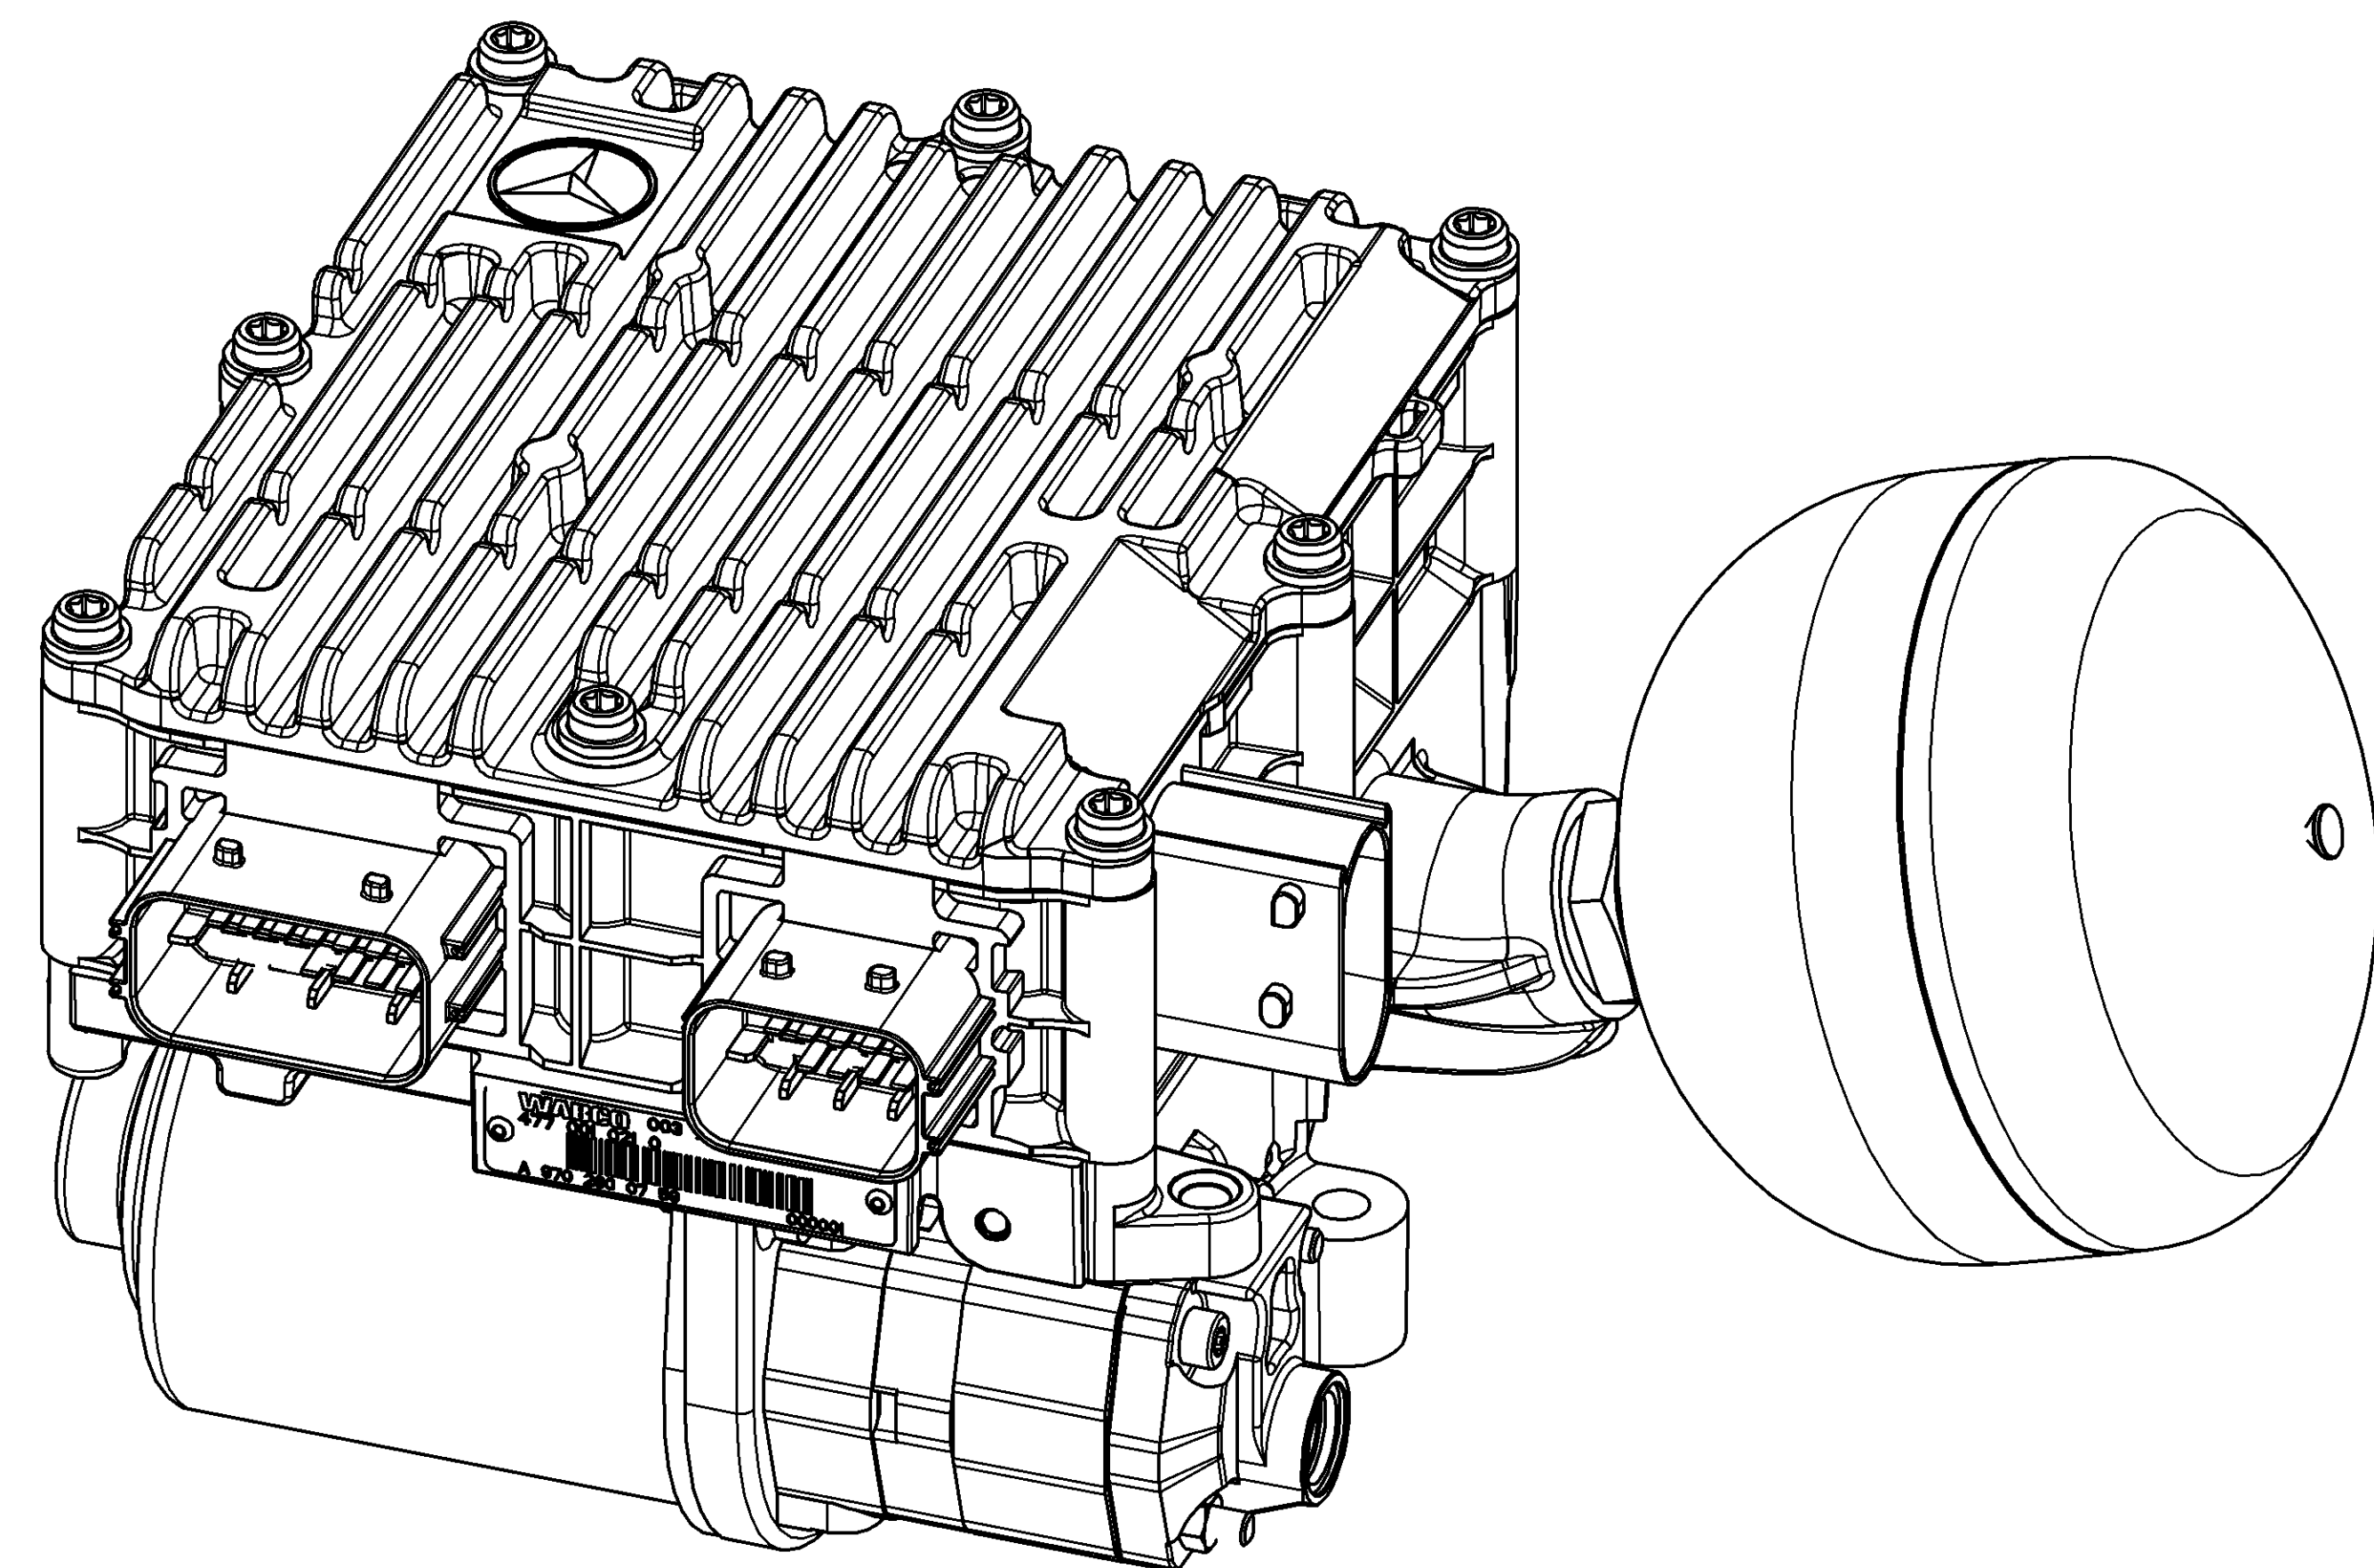
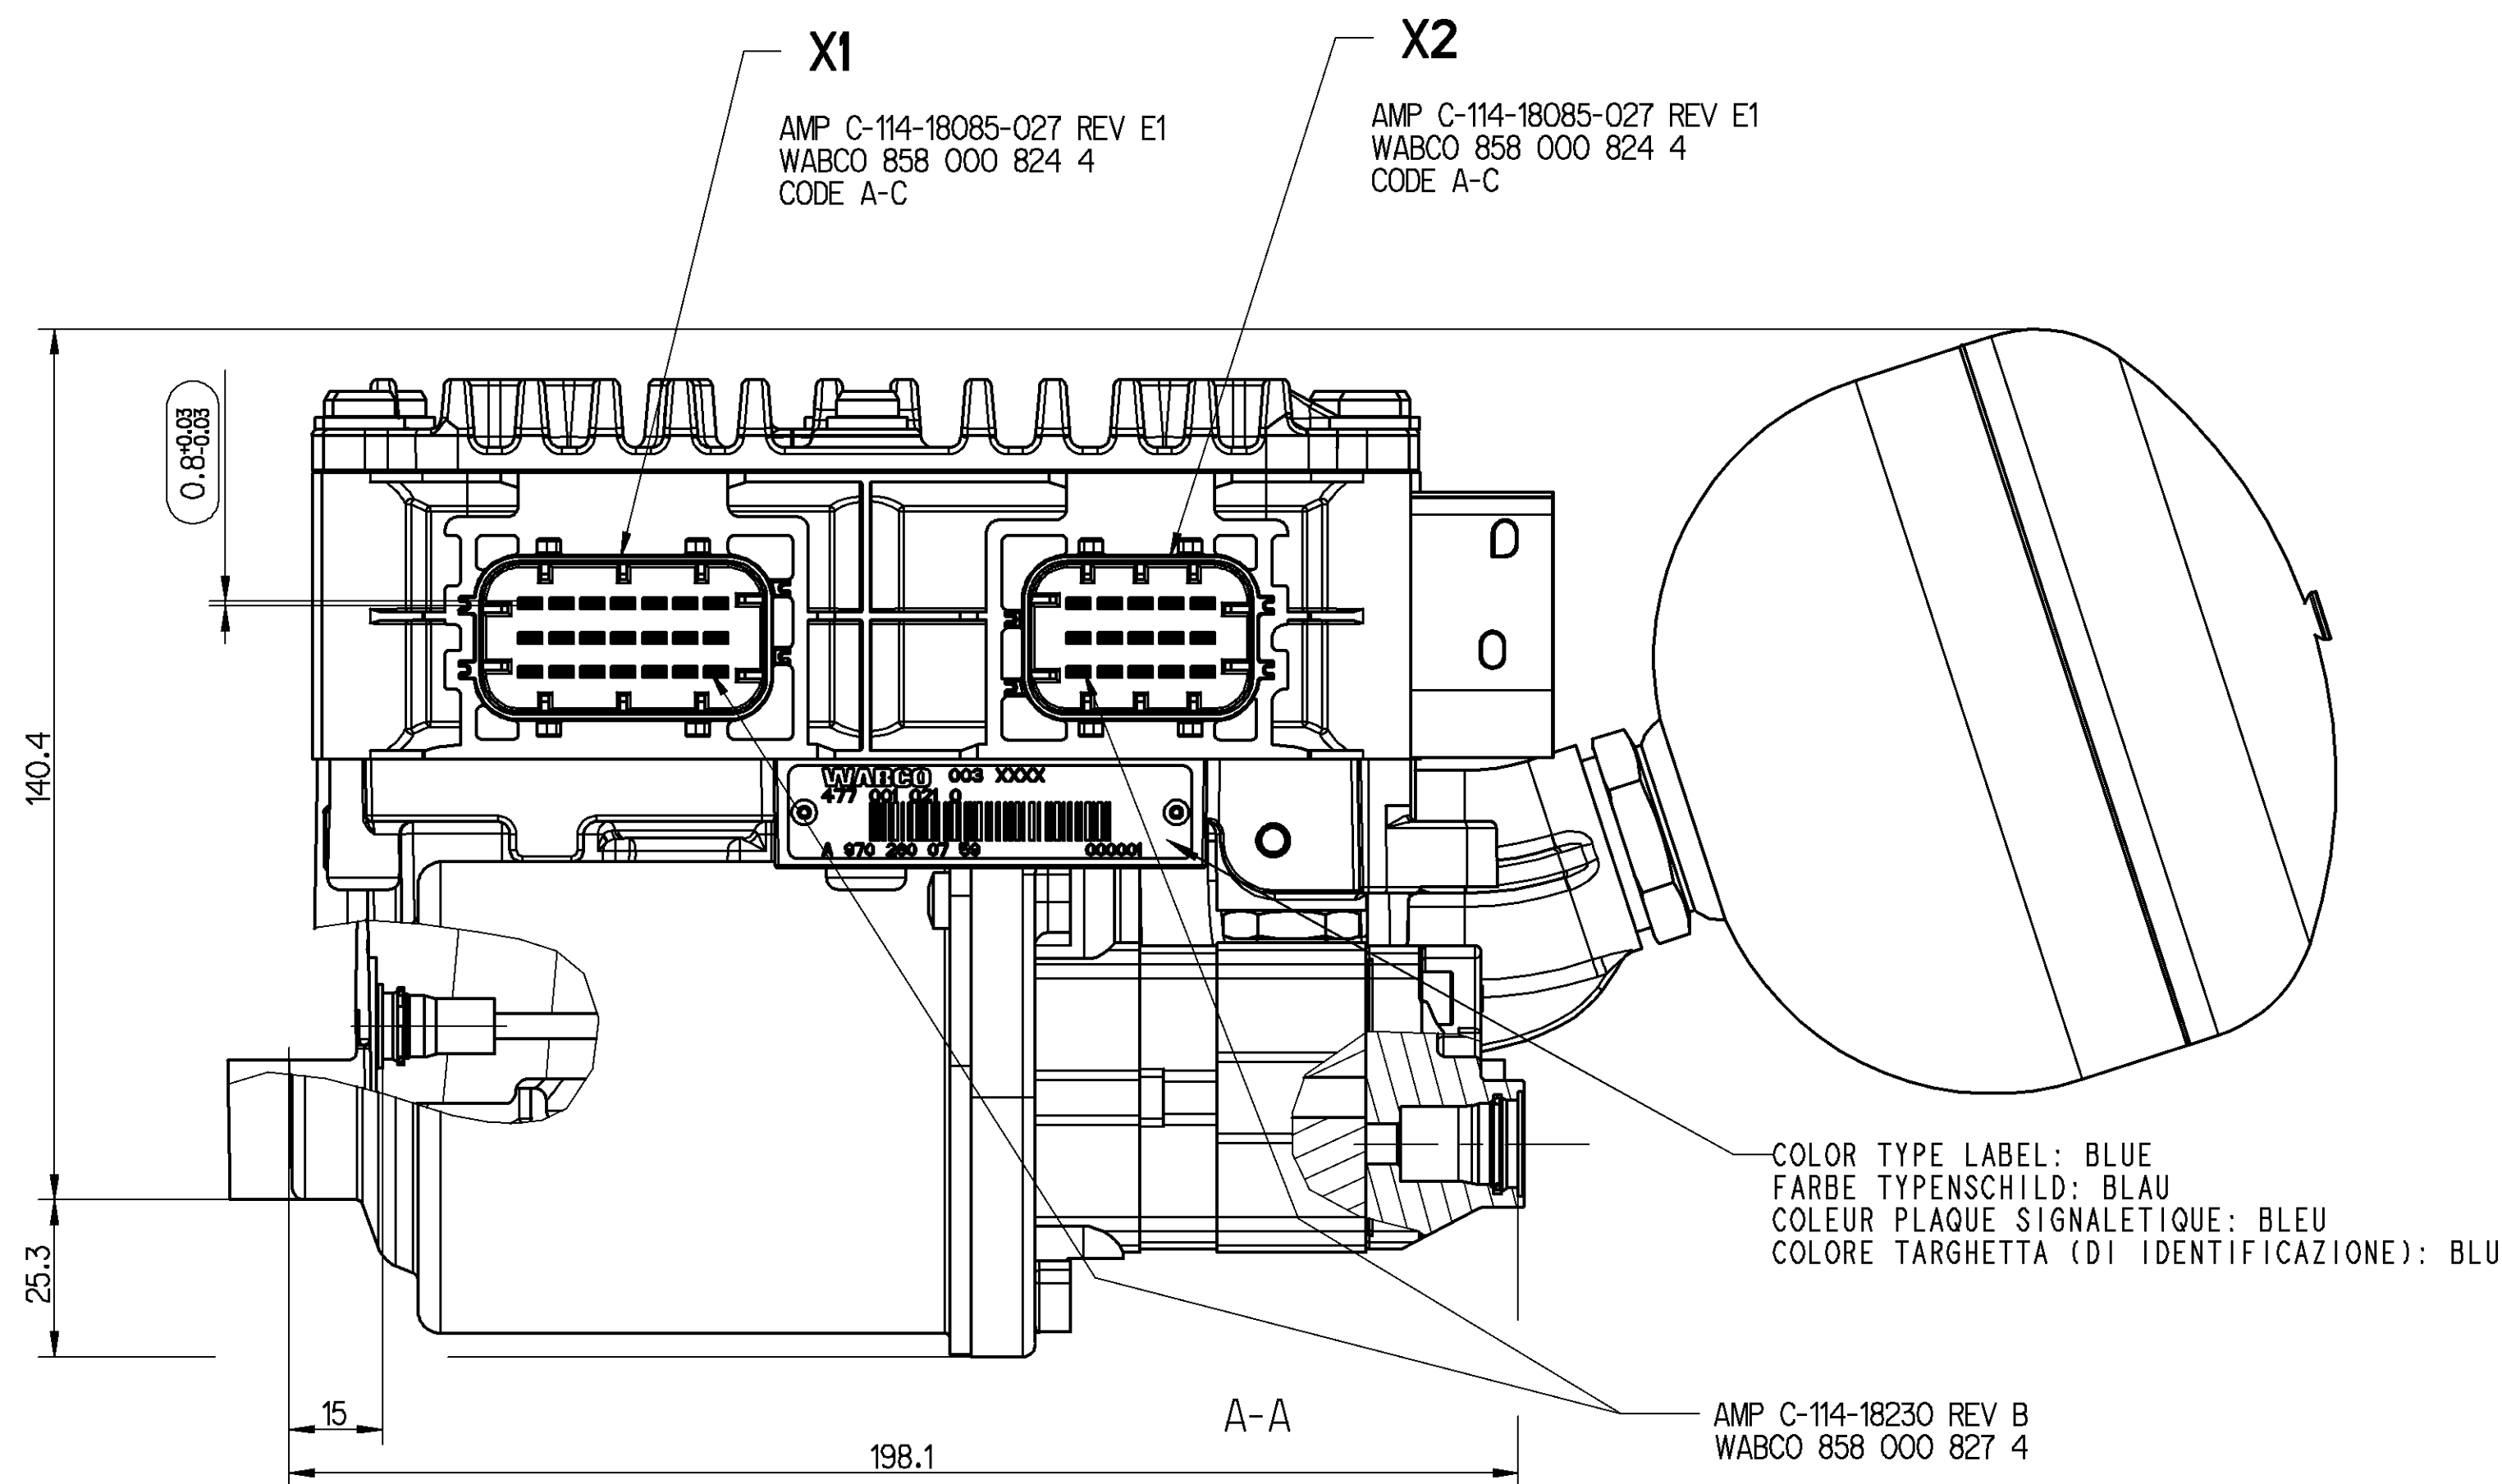
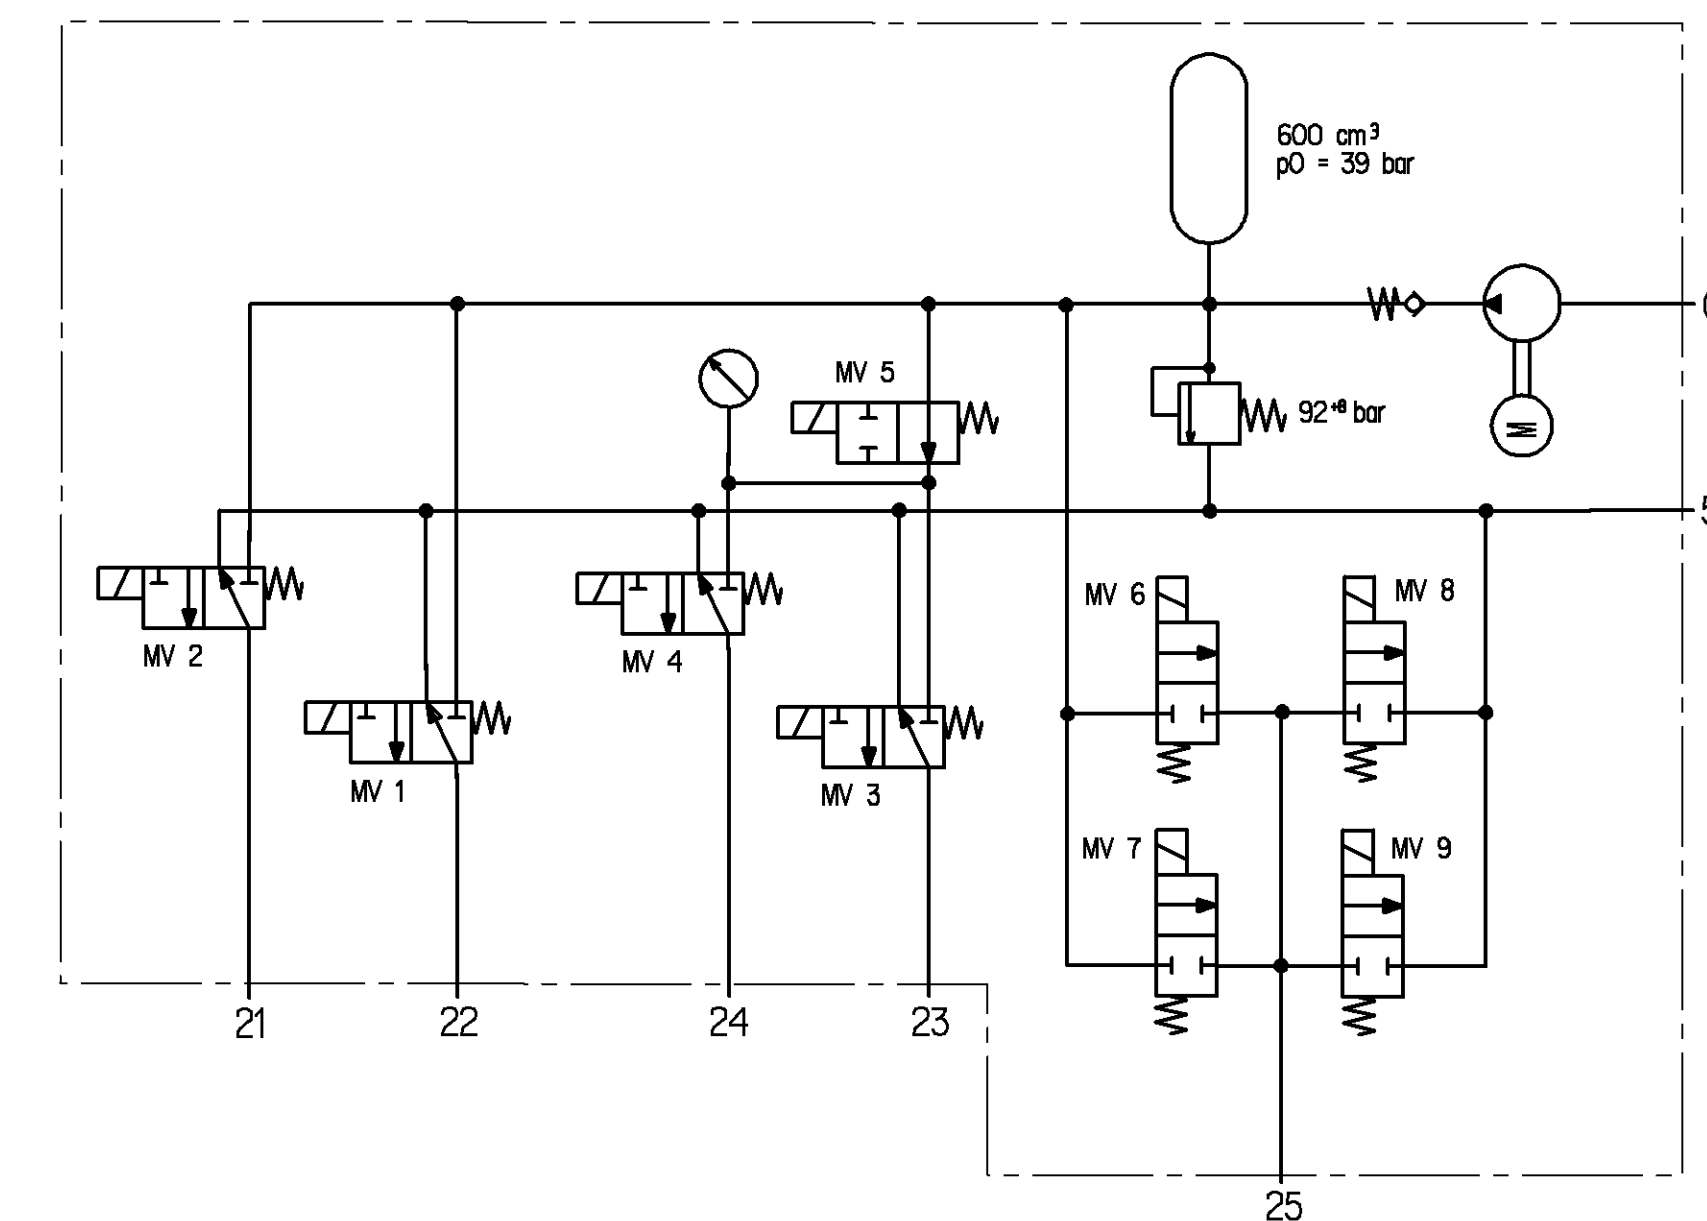
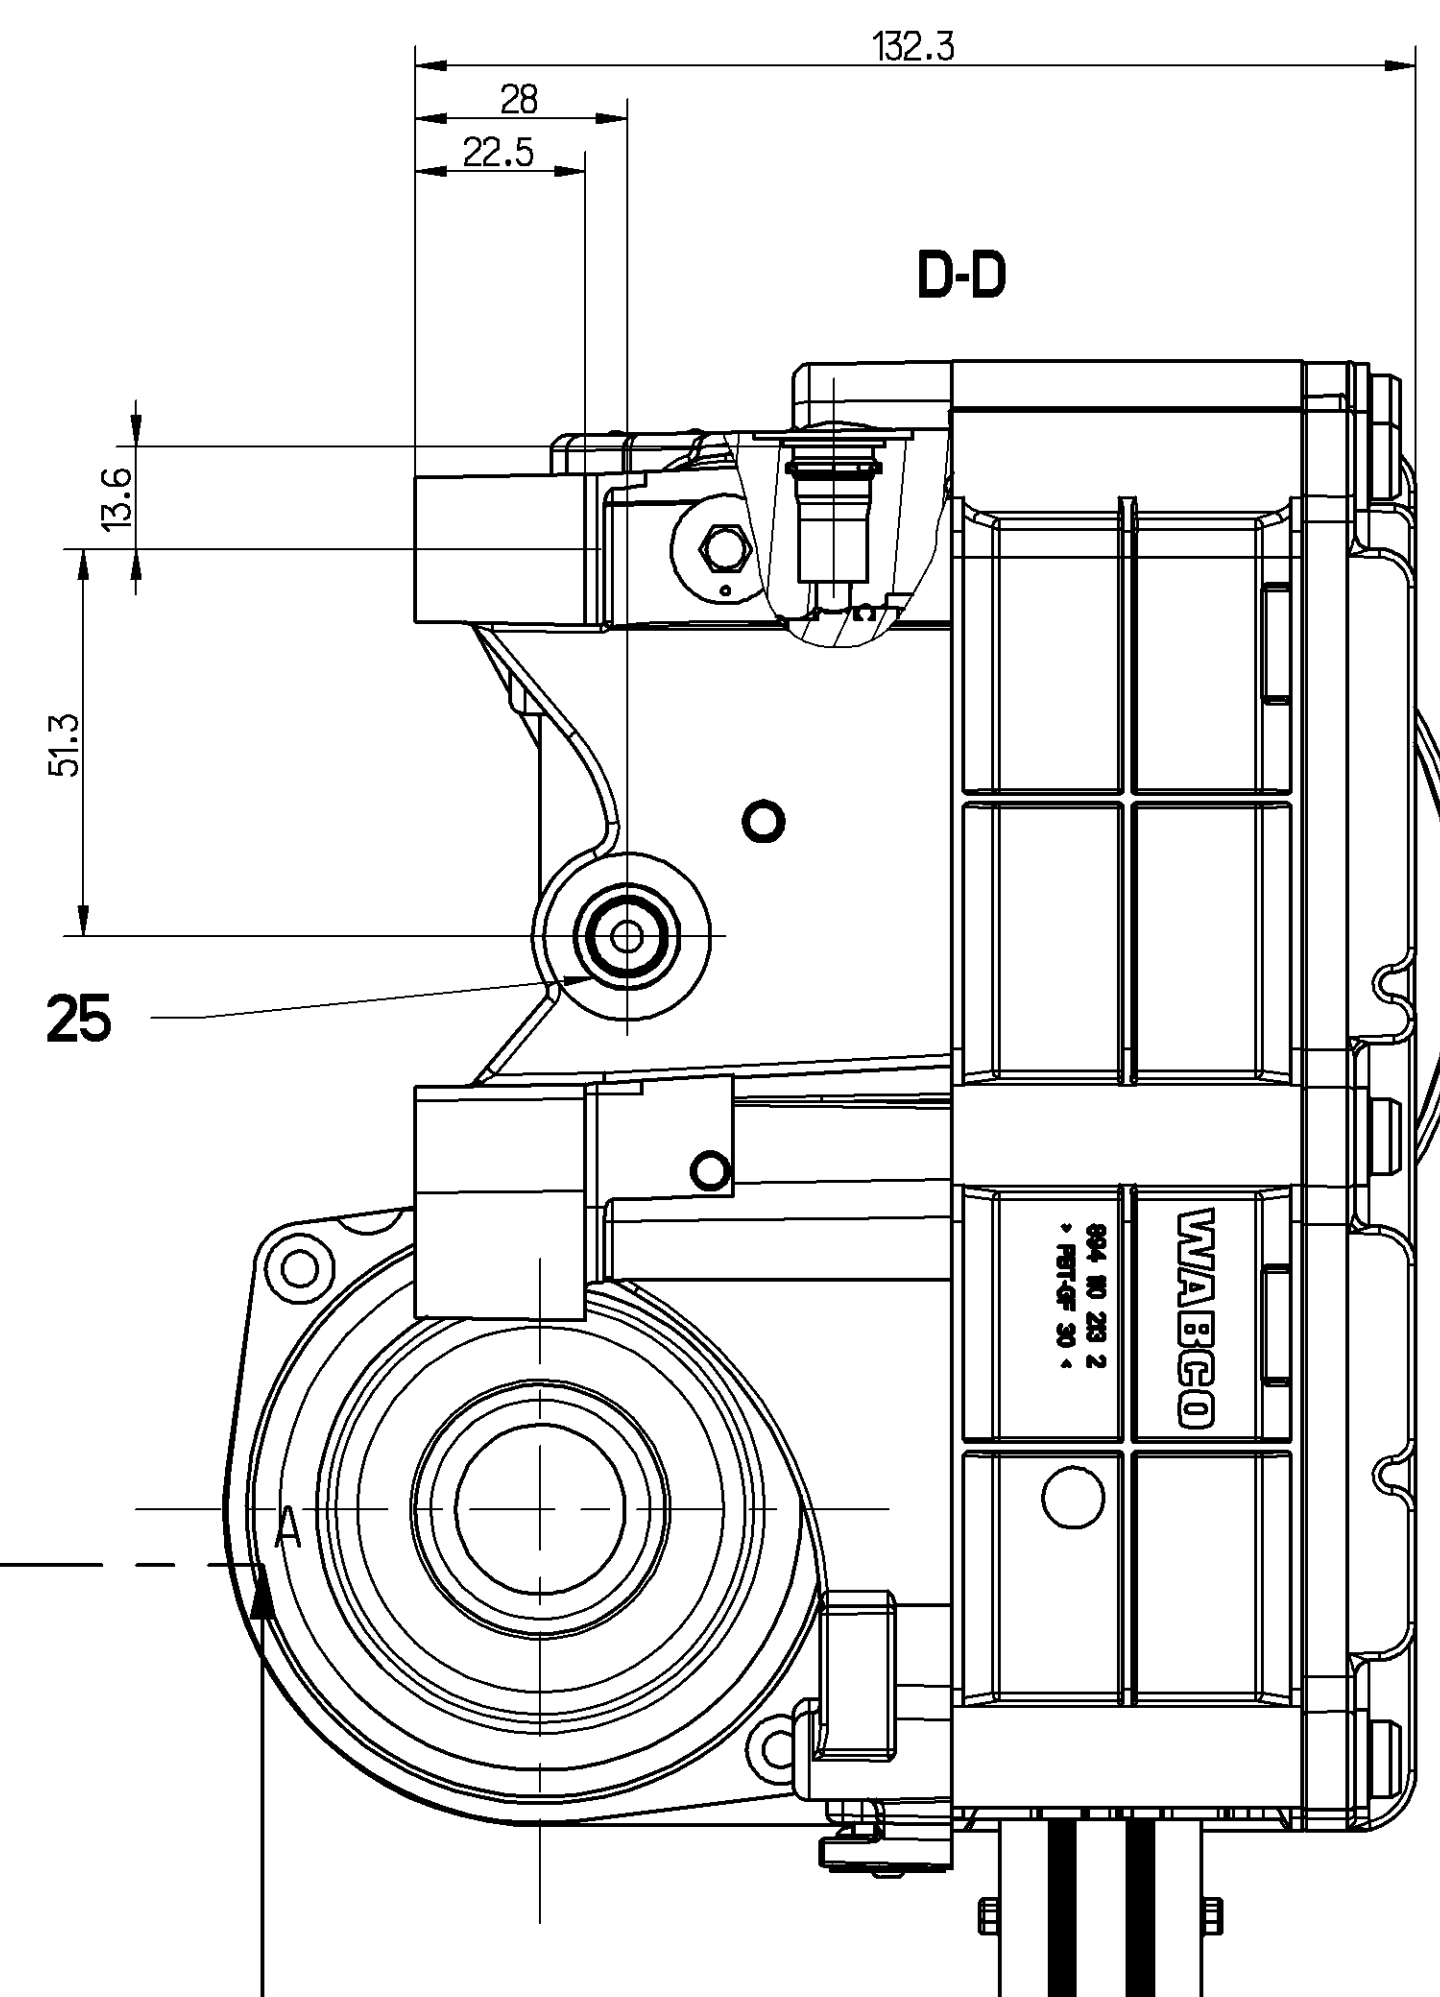


- 01 SUCTION PORT
SAUGANSCHLUSS
ORIFICE D'ASPIRATION
ASPIRAZIONE
- 21 DISCHARGE PORT "RAIL 5/6"
DRUCKANSCHLUSS "GASSE 5/6"
REFOULEMENT "SELECTION 5/6"
ORIFIZIO DI MANDATA "RANGO 5/6"
- 22 DISCHARGE PORT "RAIL R"
DRUCKANSCHLUSS "GASSE R"
REFOULEMENT "SELECTION R"
ORIFIZIO DI MANDATA "RANGO R"
- 23 DISCHARGE PORT "GEAR R/2/4/6"
DRUCKANSCHLUSS "GANG R/2/4/6"
REFOULEMENT "PASSAGE R/2/4/6"
ORIFIZIO DI MANDATA "MARCIA R/2/4/6"
- 24 DISCHARGE PORT "GEAR 1/3/5"
DRUCKANSCHLUSS "GANG 1/3/5"
REFOULEMENT "PASSAGE 1/3/5"
ORIFIZIO DI MANDATA "MARCIA 1/3/5"
- 25 DISCHARGE PORT "CLUTCH"
DRUCKANSCHLUSS "KUPPLUNG"
REFOULEMENT "EMERATAGE"
ORIFIZIO DI MANDATA "FRIZIONE"
- 51 RETURN FLOW
RUECKLAUF
RETOUR
RITORNO

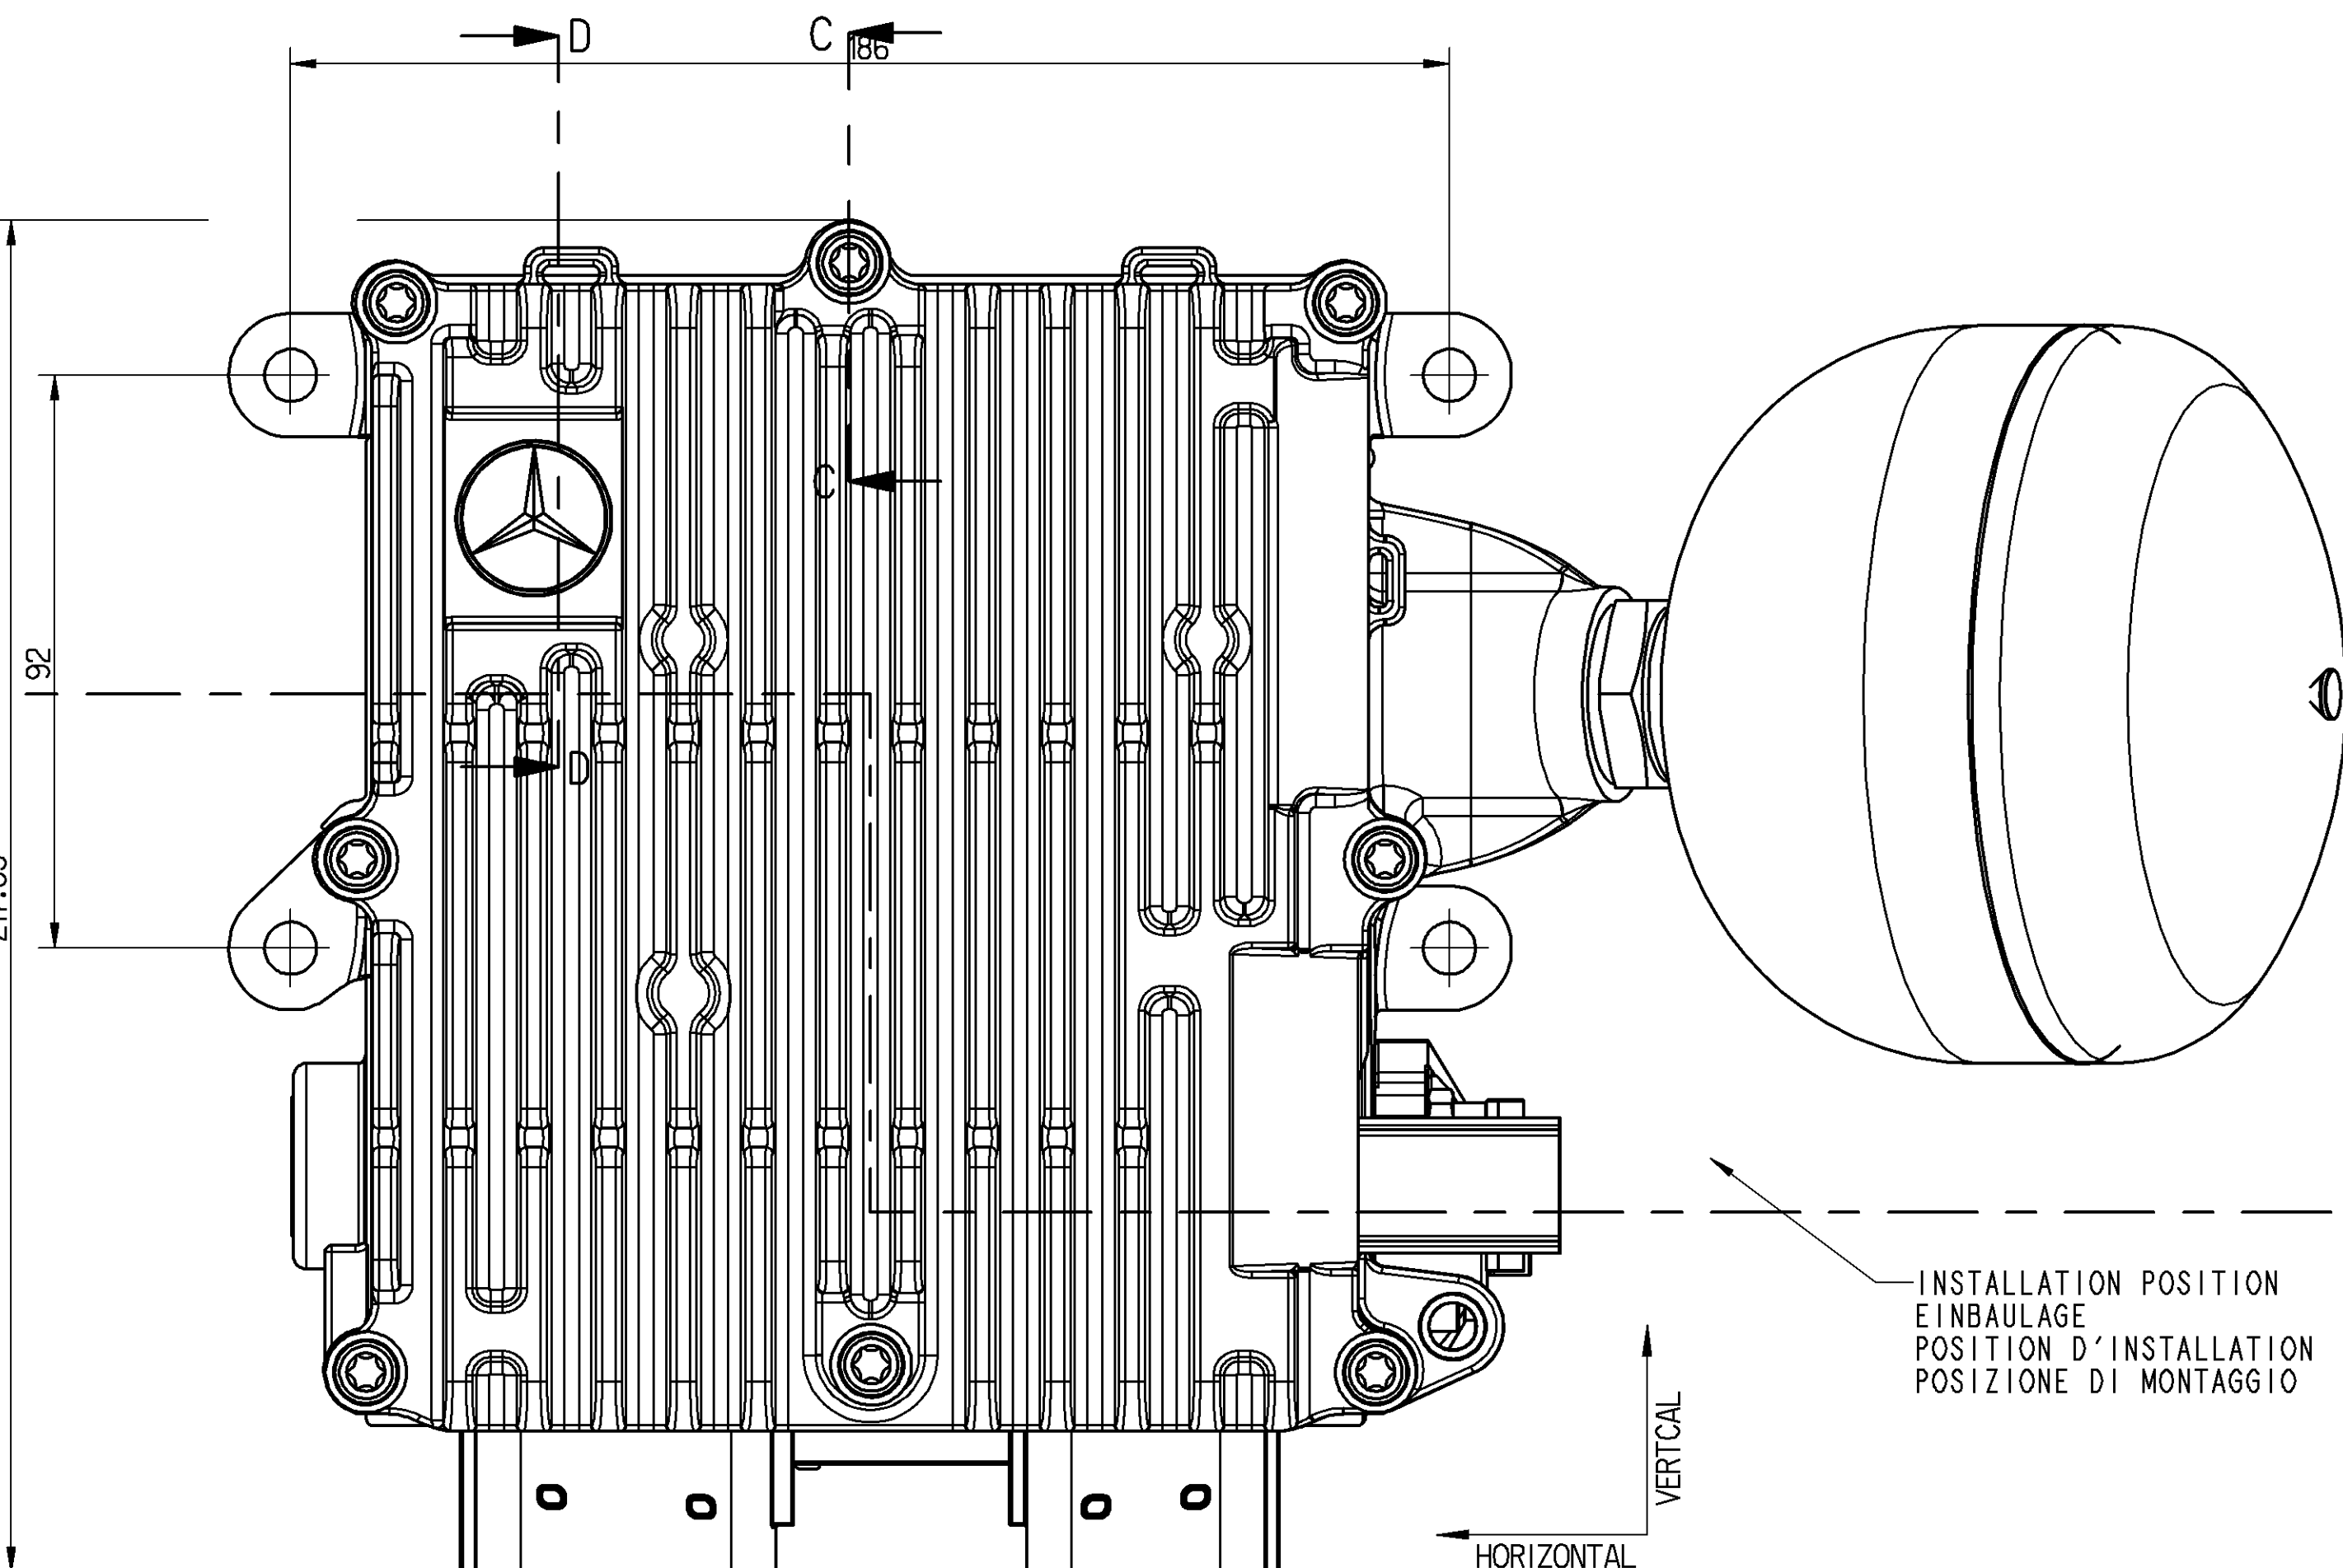

C-C

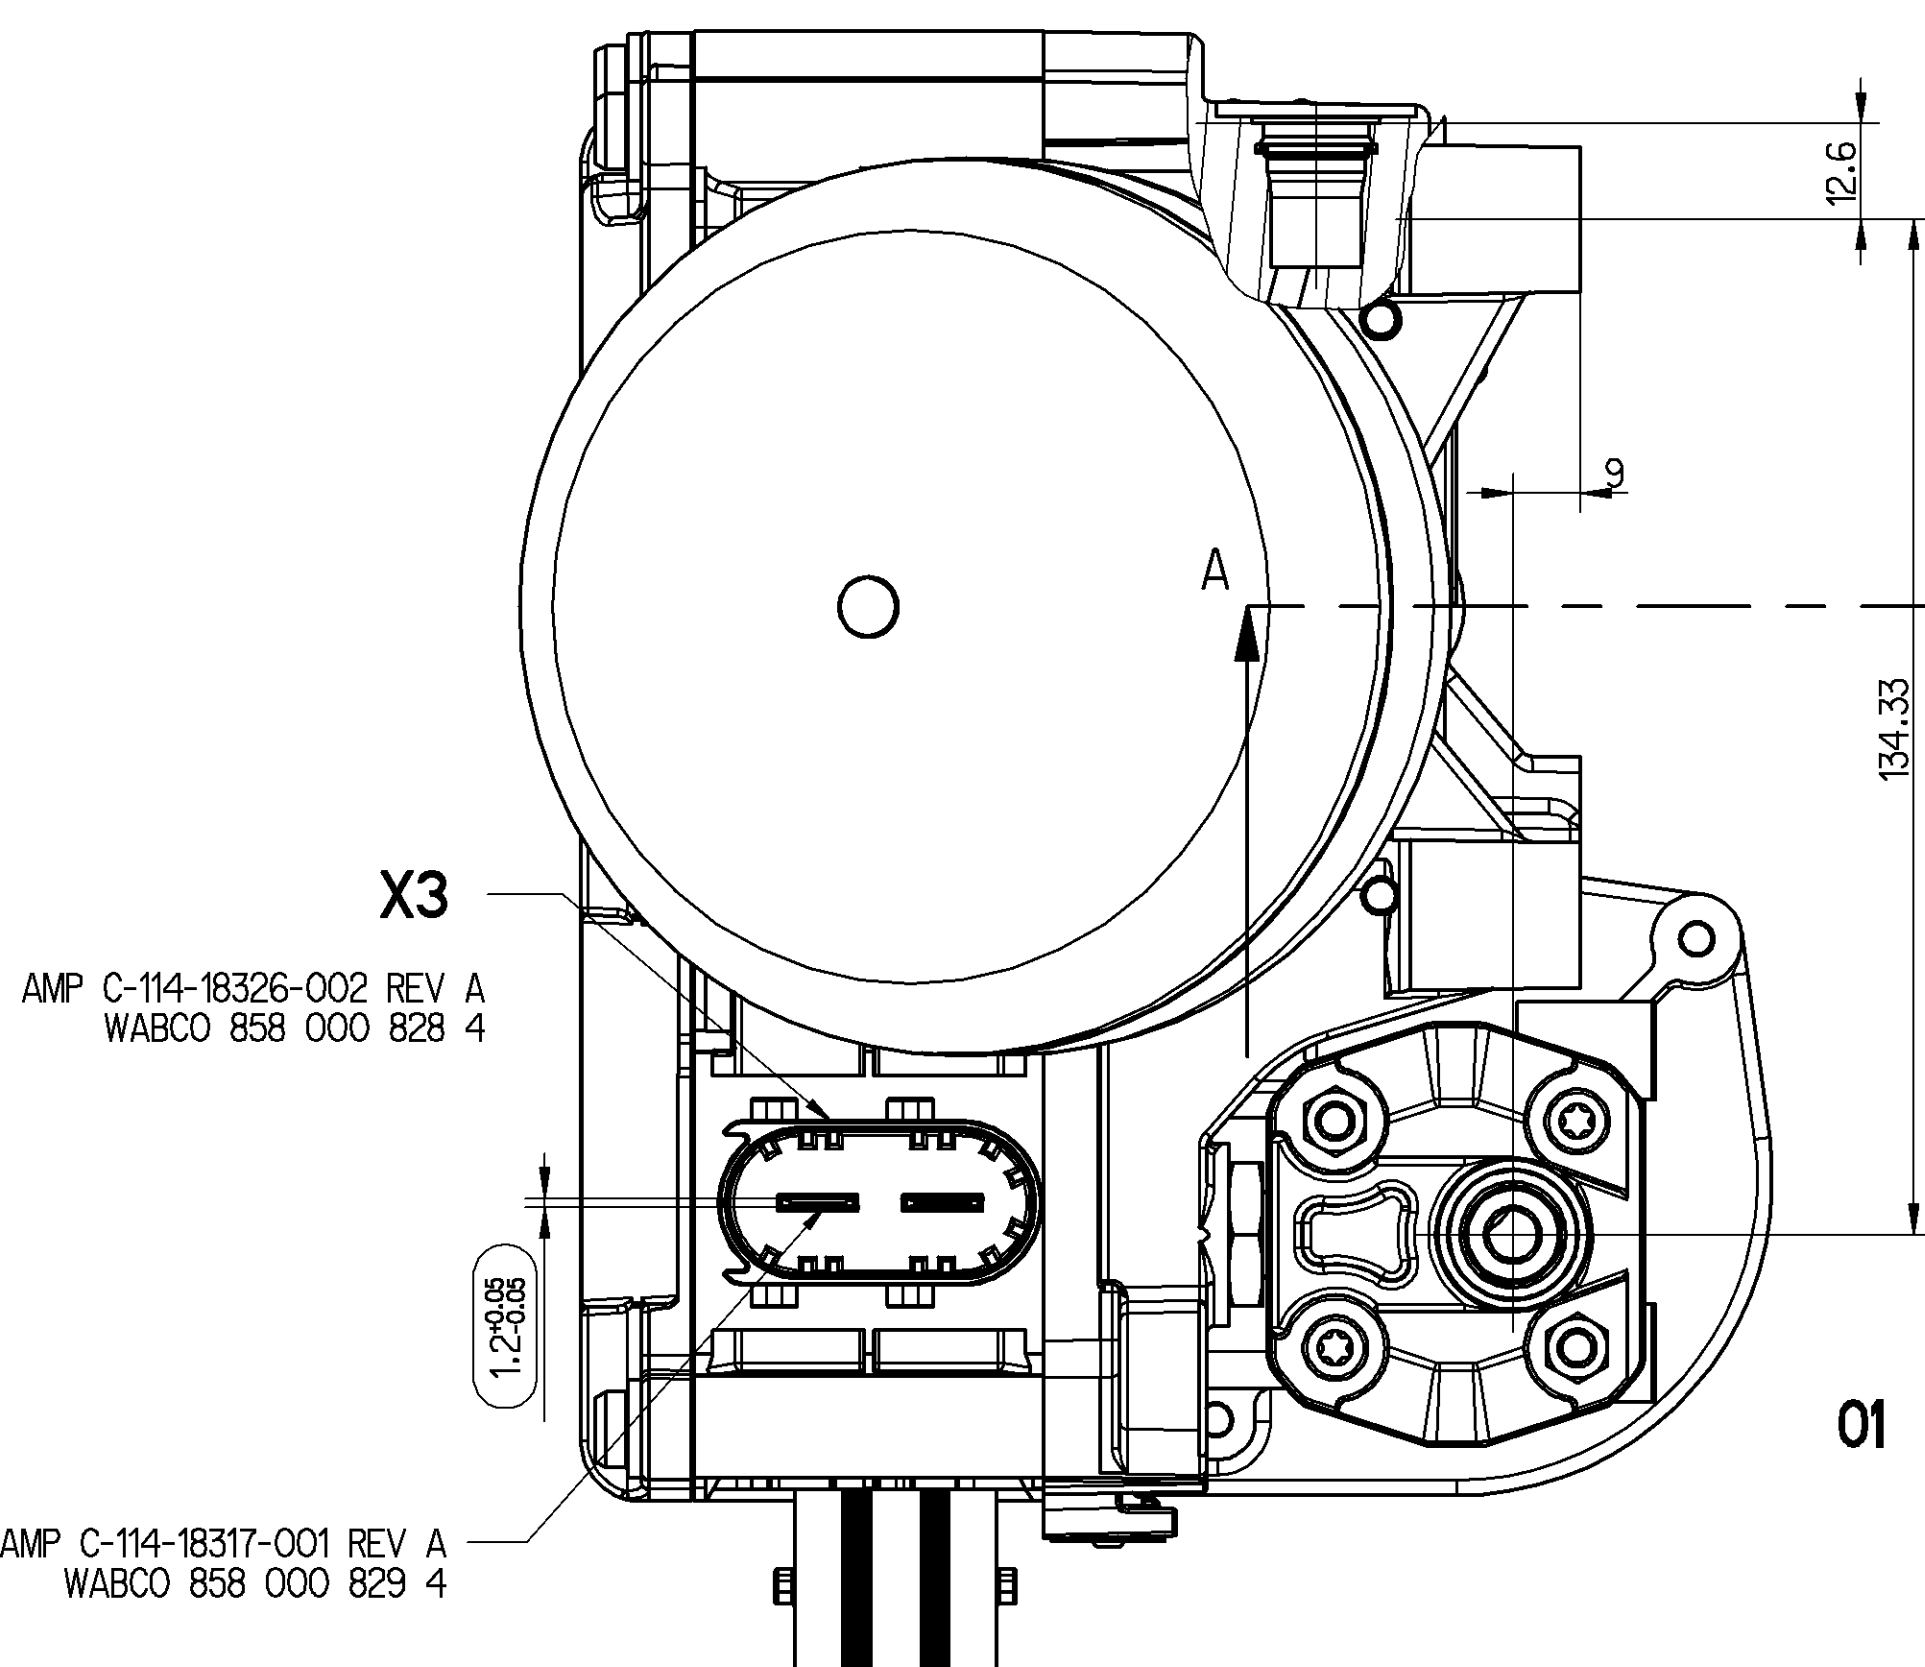

21, 22, 23, 24, 25

TECHNICAL DATA
TECHNISCHE DATEN
CARACTERISTIQUES TECHNIQUES
CARATTERISTICHE TECNICHE

WORKING MEDIUM
BETRIEBSMEDIUM
FLUIDE DE UTILISATION
FLUIDO DI ESERCIZIO

WORKING PRESSURE
BETRIEBSDRUCK
PRESSION DE UTILISATION
PRESSIONE DI ESERCIZIO

WORKING PRESSURE MAX.
MAX. BETRIEBSDRUCK
PRESSION DE UTILISATION MAX.
PRESSIONE DI ESERCIZIO MAX.

TERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
PLAGE DE TEMPERATURE EN UTILISATION
CAMPO TERMICO DI APPLICAZIONE

VOLTAGE
BETRIEBSSPANUNG
TENSION
TENSIONE

INSTALLATION POSITION AS DRAWN
EINBAULAGE WIE GEZEICHNET
POSITION D'INSTALLATION SUIVANT DESSIN
POSIZIONE DI MONTAGGIO COME DISEGNATO

PVC PACKAGING NOT PERMISSIBLE
KEINE PVC VERPACKUNG ZULAESSIG
CPV IMBALLAGE NON AMMISSO
CPV IMBALLAGGIO NON AMMESSA

PENTOSIN CHF 11S

60 82 BAR

100 BAR

-30 °C +120 °C

