
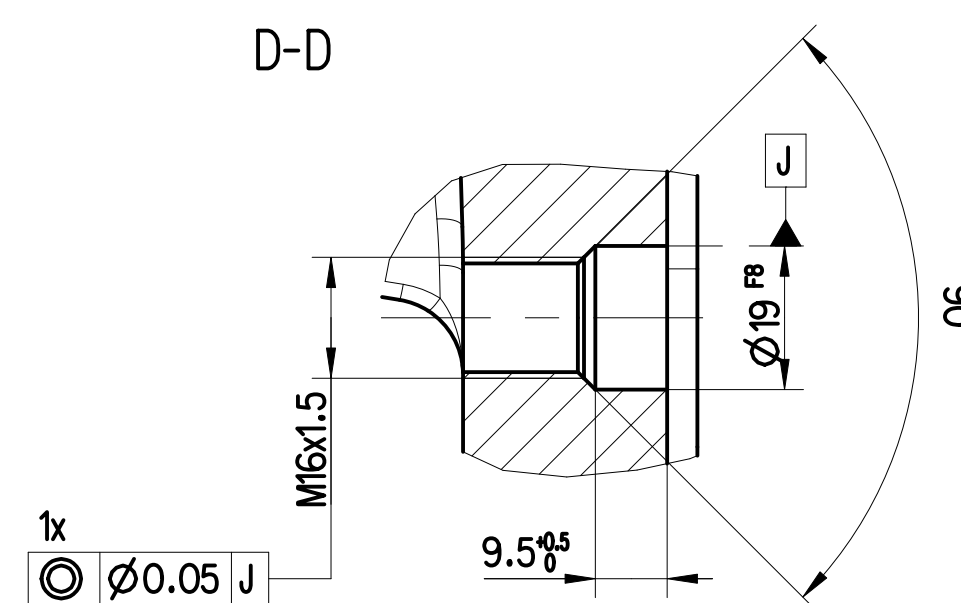
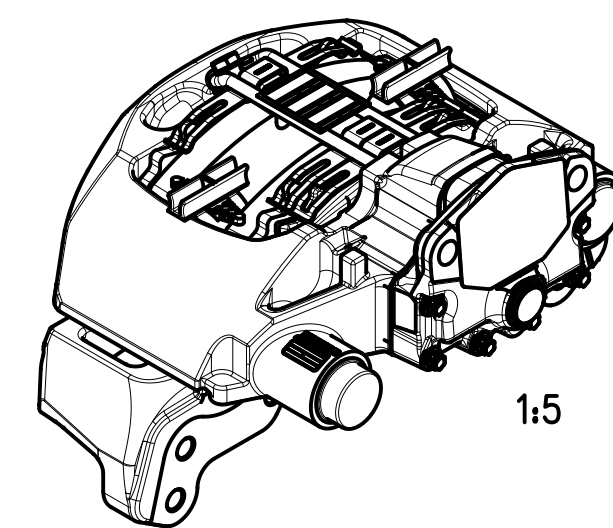
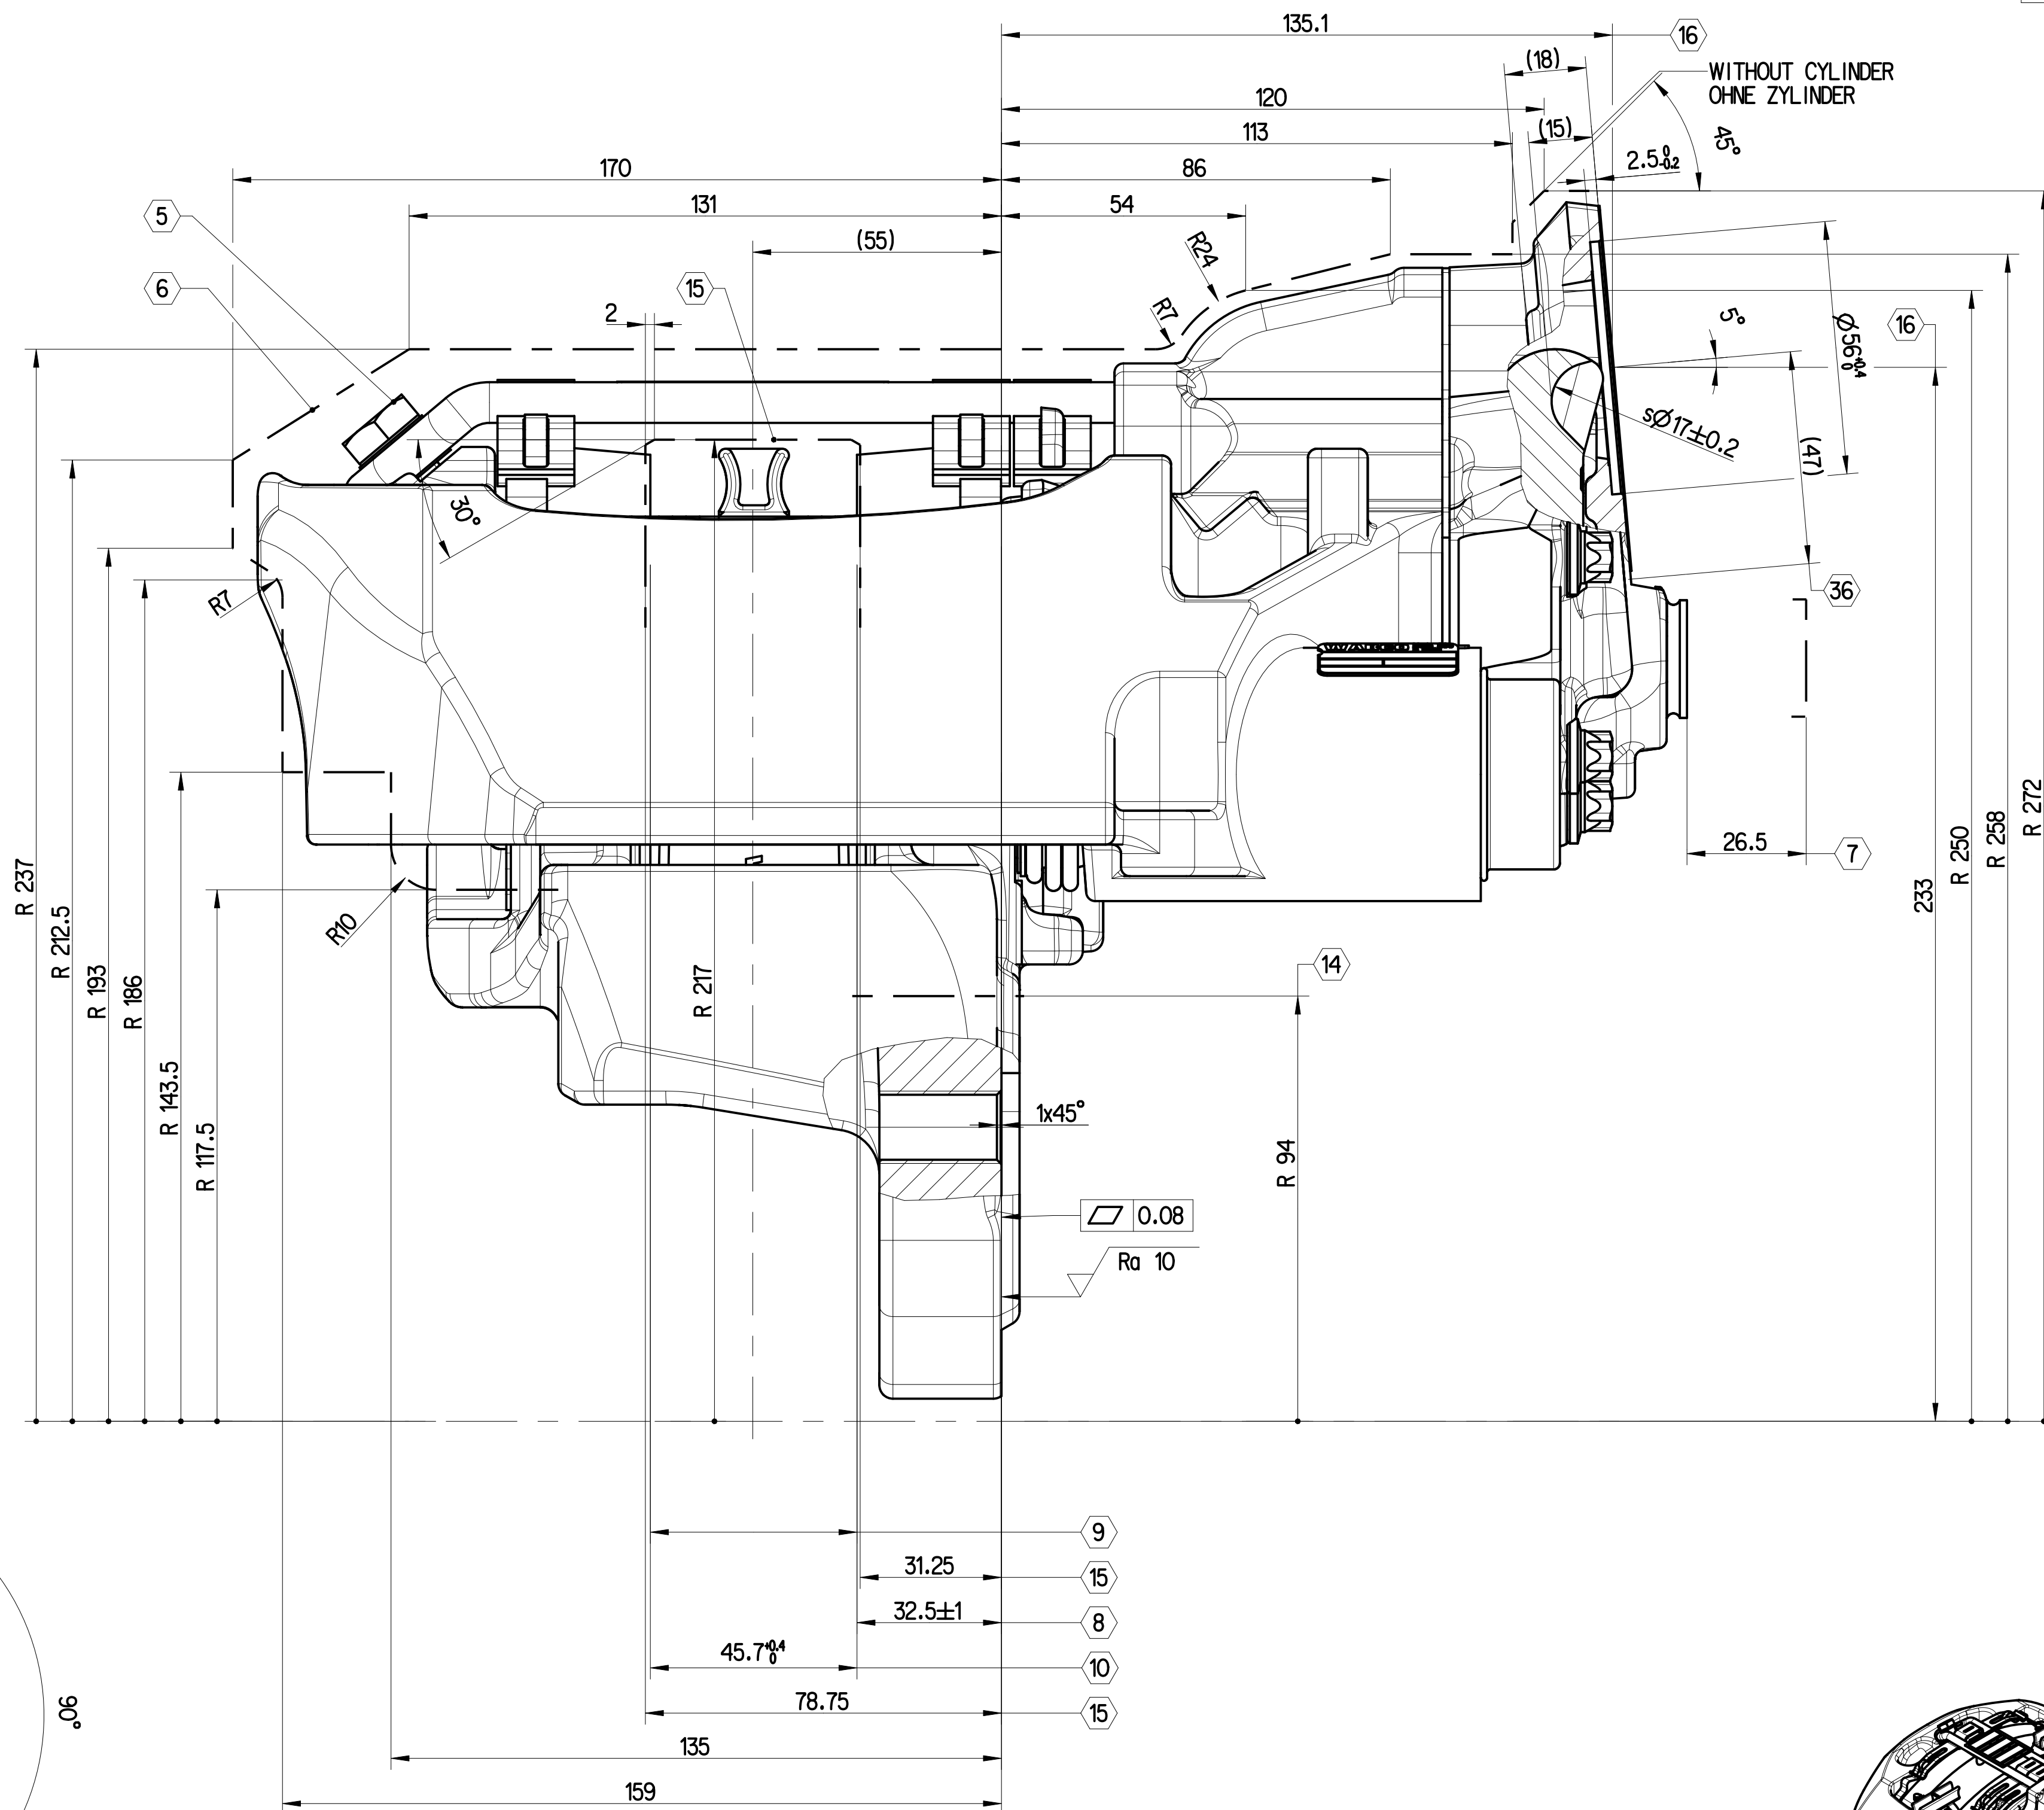


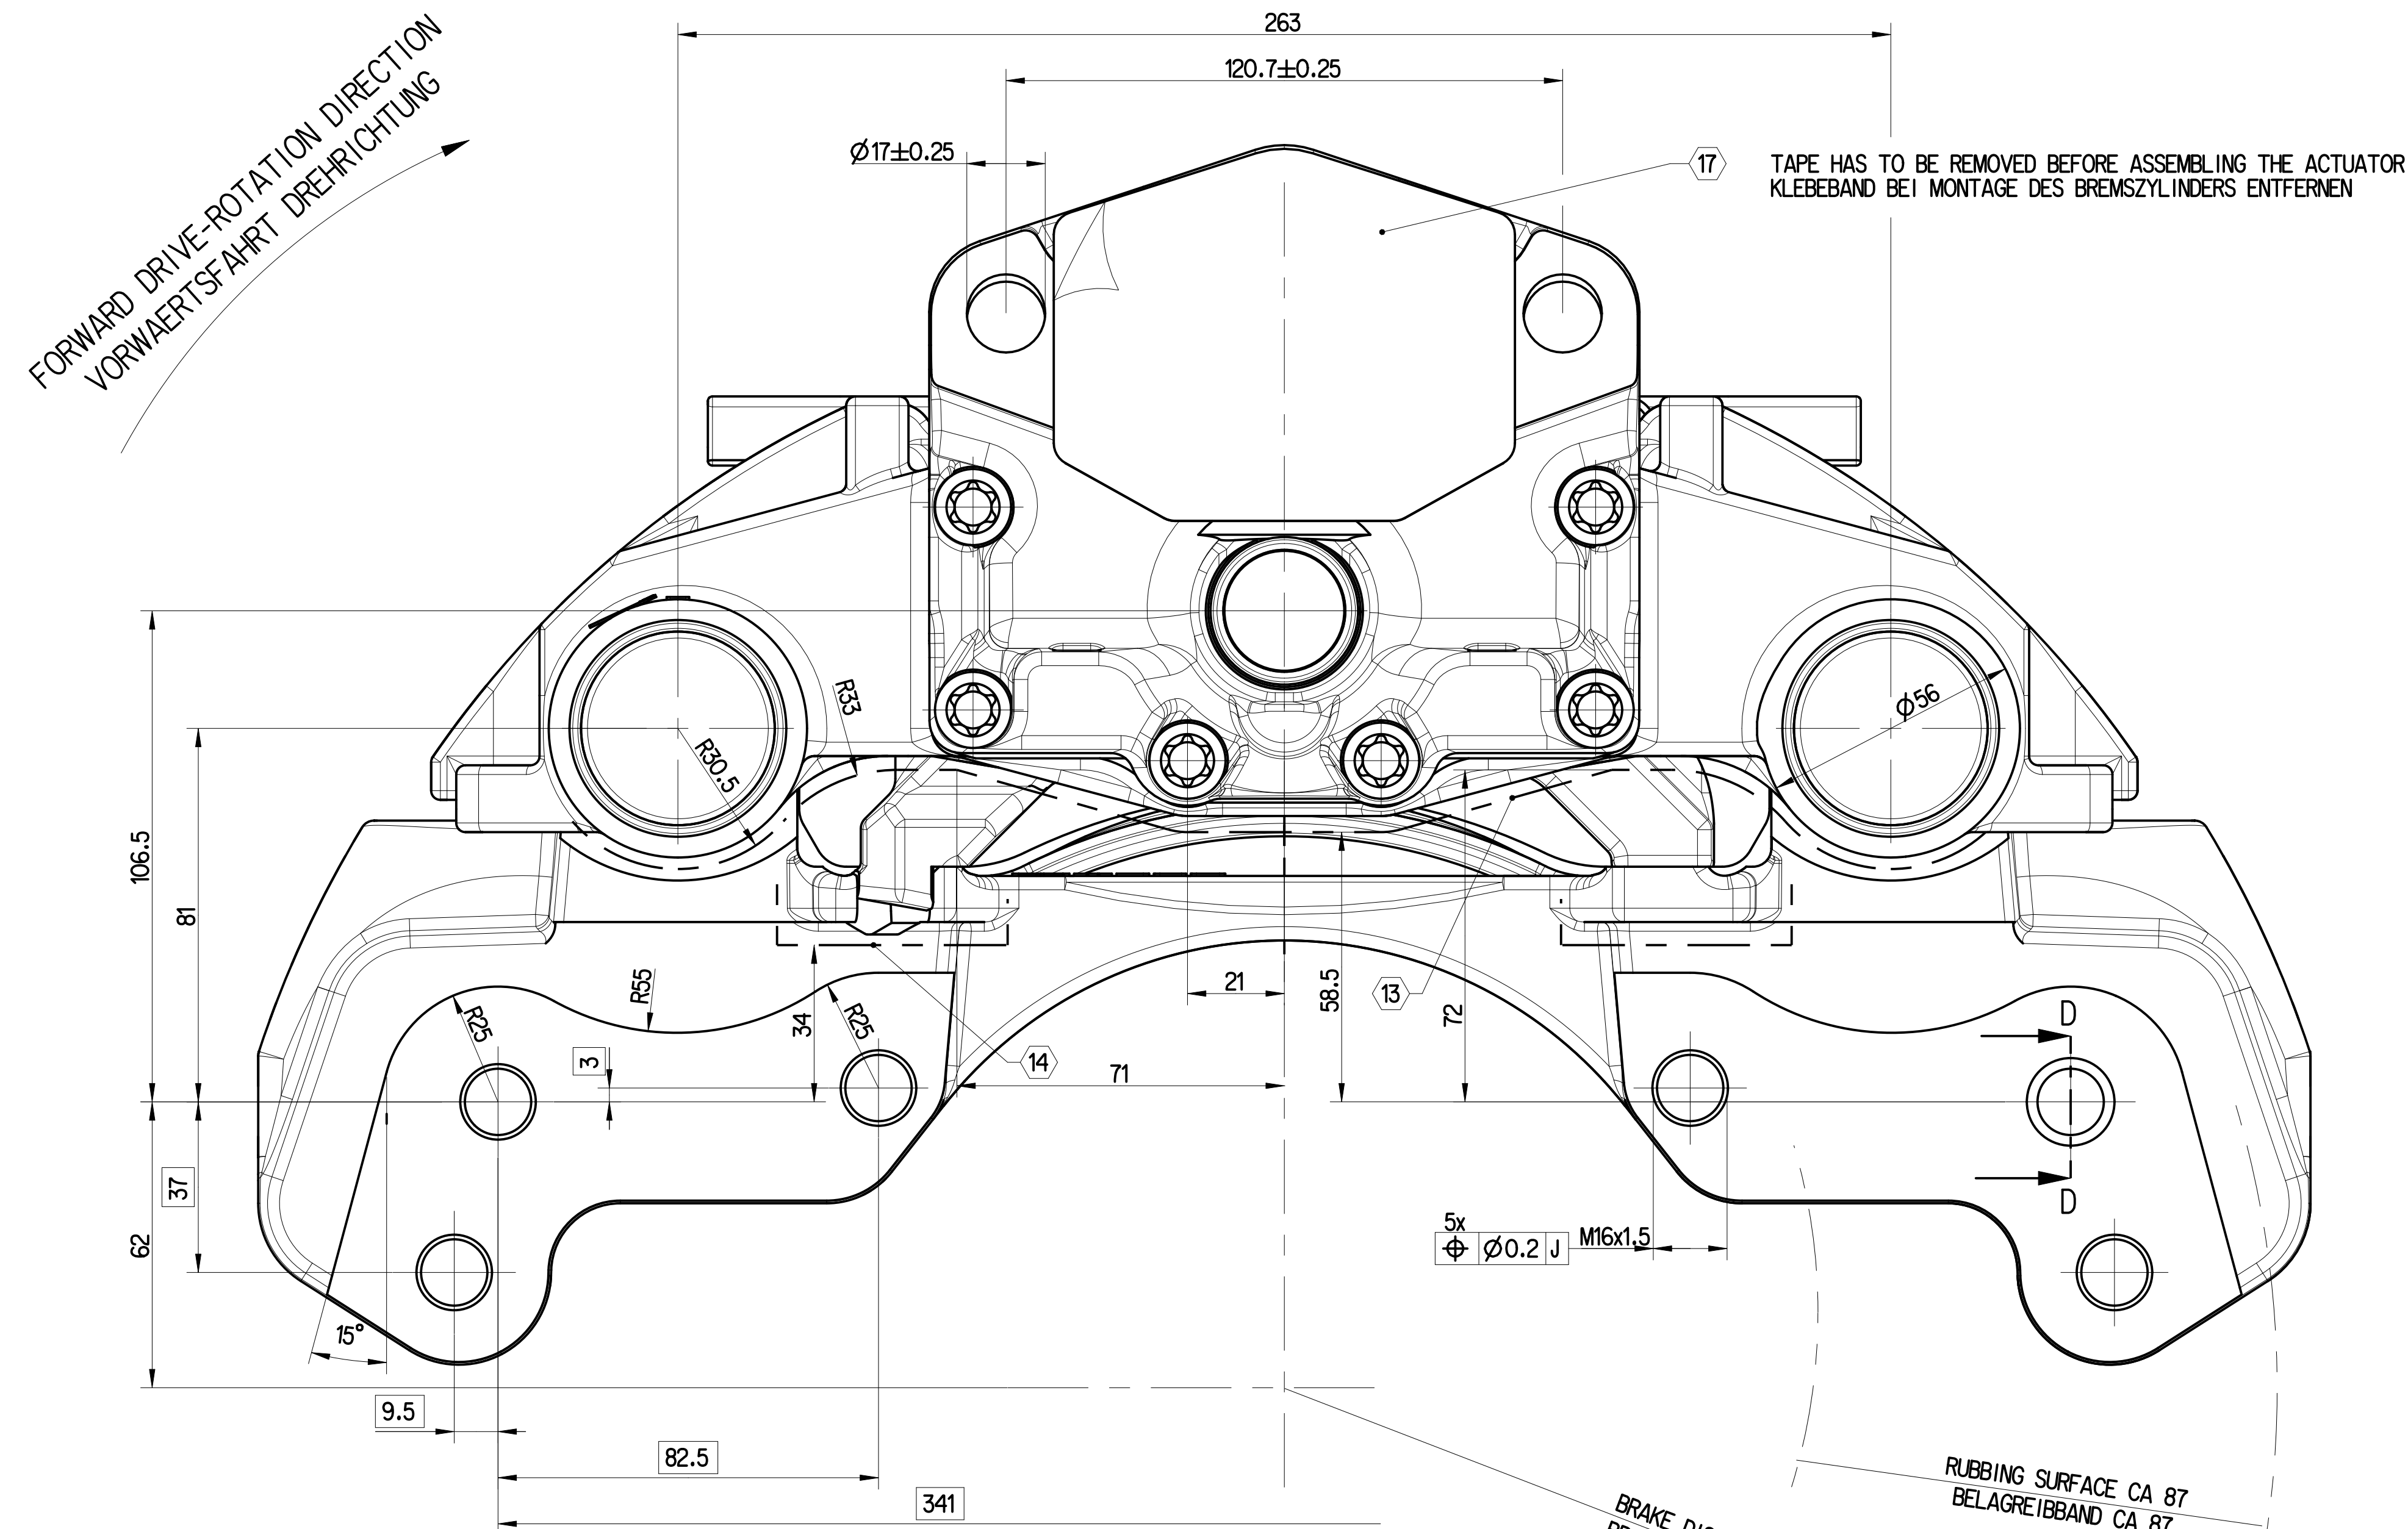

	NOTE BEMERKUNG			TIGHTENING TORQUE ANZIEHHEIMOMENT	WIDTH OVER FLATS SW
①	-			-	-
②	-			-	-
③	-			-	-
④	-			-	-
⑤	PAD HOLD DOWN DEVICE BUEGELBEFESTIGUNG	DIN 933 M10x20 -8.8	MICROENCAPSULATED MIKROVERKAPSELT	30 + 15 Nm	17

- | | | |
|----|--|-----------------------------|
| 5 | MAX. ROTARY OUTLINE
MAXIMALE ROTATIONSKONTUR | |
| 6 | MAX. DISPLACEMENT
MAXIMALE VERSCHIEBUNG | |
| 8 | PERMISSIBLE FITTING DIMENSION OF THE DISC
ZULAESSIGES SCHEIBEINEINMAASS | |
| 9 | BRAKE DISC NEW
45-0.2 WEARABLE UP TO:
VERSCHLEISSBAR BIS: | 37 |
| 10 | ASSEMBLY DIMENSION FOR BRAKE PADS
EINBAUMASS FLUER BREMSBELAEGE | |
| 11 | REMAINING LINING THICKNESS
RESTBELAGSTAEKKE | 2 mm |
| 12 | FORWARD DRIVE - ROTATION DIRECTION
VORWAERTS DREHRICHTUNG | |
| 13 | ENVELOPE CURVE CALIPER WITH COVER
HUELLEKURVE BREMSSATTEL MIT DECKEL | |
| 14 | ENVELOPE CURVE CARRIER
HUELLEKURVE BREMSENTRAEGER | |
| 15 | MAXIMUM DISC CLEARANCE
SCHEIBENFREIWEITUNG | |
| 16 | CENTER LINE CYLINDER
MITTE ZYLINDER | |
| 17 | FOR SHIPMENT AND STORAGE
FLUER TRANSPORT UND LAGERUNG | |
| 18 | HEXAGON WIDTH OVER FLATS
SECHSKANT SW | 8 |
| 19 | - - - | |
| 20 | DETAILED INFORMATION FOR MARKING
DETAILLIERTE INFORMATIONEN ZUR KENNZEICHNUNG | 640 175 060 0 DOC. CODE 922 |

	NOTE BEMERKUNG	TIGHTENING TORQUE ANZIEHMOMENT	WIDTH OVER FLATS SW
21	-	-	-
22	-	-	-
23	-	-	-
24	-	-	-
25	-	-	-

- | | | | |
|----|--|---------------|---|
| 26 | - - - | | |
| 27 | - - - | | |
| 28 | - - - | | |
| 29 | - - - | | |
| 30 | - - - | | |
| 31 | - - - | | |
| 32 | - - - | | |
| 33 | - - - | | |
| 34 | - - - | | |
| 35 | - - - | | |
| 36 | BRAKE ACTUATOR SIZE RESTRICTION SEE PART SPECIFICATION
ZYLINDERANSCHLUSSMASSE NACH PART SPEZIFIKATION | 640 225 000 0 | MAX. ACTUATOR TYPE
MAX. ZYLINDER TYP |

COATING
ANTI-CORROSION PROTECTION - SALT SPRAY TEST MIN. 96 HOURS
BESCHICHTUNG
KORROSIONSSCHUTZ-SALZSPRUEHNEBELPRUEF. MIN. 96 STD.

640 225 057 0	MIRROR IMAGE SPIEGELBILD
640 225 056 0	AS SHOWN WIE GEZEICHNET
IDENT-NO. BRAKE MATERIAL-NR. BREMSE	EXECUTION AUSFUEHRUNG

PAN22-1	
PRODUCT SPECIFICATION:	640 225 000 0
PRODUKT SPEZIFIKATION:	
DIMENSIONS WITHOUT TOLERANCES ARE GAUGE DIMENSIONS NICHT TOLERIERTE MASSE = LEHRENMASSE	

[illegible]