

6	MAX. ROTARY OUTLINE MAXIMALE ROTATIONSKONTUR	
7	MAX. DISPLACEMENT MAXIMALE VERSCHIEBUNG	
8	PERMISSIBLE FITTING DIMENSION OF THE DISC ZUÄSSIGE SCHEIBEINEINBAUMASS	
9	BRAKE DISC NEW SCHEIBE NEU	41-0.2 WEARABLE UP TO: VERSCHLEISSBAR BIS
10	ASSEMBLY DIMENSION FOR BRAKE PADS EINBAUMASS FLUR BREMSBELÄGE	33
11	REMAINING LIVING THICKNESS RESTBELASTÄRKE	2 mm
12	FORWARD DRIVE - ROTATION DIRECTION VORWÄRTS DREHRICHTUNG	
13	ENVELOPE CURVE CALIPER WITH COVER HÜLLKURVE BREMSSATTEL MIT DECKEL	
14	ENVELOPE CURVE CARRIER HÜLLKURVE BREMSENTRÄGER	
15	MAXIMUM DISC CLEARANCE SCHEIBEINFREIGANG	
16	CENTER LINE CYLINDER MITTE ZYLINDER	
17	FOR SHIPMENT AND STORAGE FLUR TRANSPORT UND LAGERUNG	
18	HEXAGON WIDTH OVER FLATS SECHSKANT SW	8

26 ---

27 ---

28 ---

29 WEAR INDICATOR CONNECTOR TYPE
VERSCHLEISSANZEIGER STECKER TYP WABCO 441 901 316 2

30 ---

31 UNCOATED SURFACE
UNBESCHÜTTETE OBERFLÄCHE



32 ---

33 ---

34 COUNTERPART: CONNECTOR TYPE: WABCO 441 902 310 2 (NOT SUPPLIED WITH BRAKE)
GEGENSTÜCK: STECKER TYP: (NICHT BESTANDTEIL DER BREMSE)

35 ---

36 BRAKE ACTUATOR SIZE RESTRICTION SEE PART SPECIFICATION
ZYLINDERANSCHLUSSMASSE NACH PART SPEZIFIKATION 640 250 000 0 MAX. ACTUATOR TYPE 24

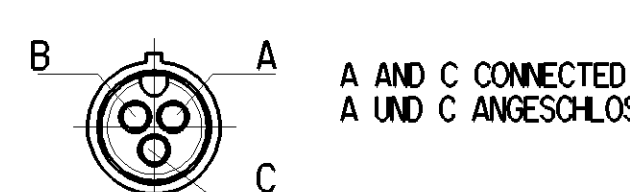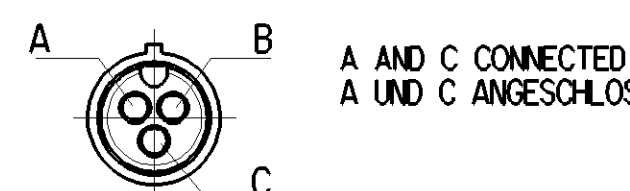

640 175 060 0 DOC. CODE 922

PAN25-1

WABCO
DISC BRAKE PAN-RANGE LIGHT
SCHEIBENBREMSE PAN-REIHE LEICHT

640 250 000 0

Medium	X	±1	±2	±3	±4	±3°	38.86	1:1	640 250 003 0	Doc. Code	Language	Sheet	
Course		±2	±3.5	±5	±6.5		Size	CAD System		053	EN	1/1	
Tapped Holes acc.							A 0	CF80		EDM-No.	Revision	Techn. Resp.	Replacement for