



AFTERMARKET





























Air Reservoirs

Product Catalogue



WABCO

Content

Safety Instructions	3
Certificate	4
Air reservoirs for trucks	8
	8
	8
	8
	9
	9
	10
	10
Air reservoirs for trailer	11
	11
	11
	11
	12
	12
	12
	13
	13
	14
	15
	16
	16
	16
	17
	17
	17
	17
	18
	18
Clamp bands / Drain valves	19
	19
	19
Index	20
Cross references	21

Safety Instructions



Caution

- Comply with the valid regulations for the use of air reservoirs.
- Use WABCO air reservoirs only up to the allowed pressure.
- It is strictly forbidden to weld any part on the air reservoir.
- Use WABCO air reservoirs only for Compressed Air Braking Systems in vehicles.
- The air reservoir should be in a low position as possible so that piping can be installed sloping downwards towards the reservoir.
- Drain the air reservoirs by drain valve.
- Usage of proper WABCO clamps is highly recommended.
- The name plate must be covered while painting to keep it readable.

ZF CVS designs and manufactures devices and systems intended for the braking of industrial vehicles. ZF CVS is since always the privileged partner of the large manufacturers of air reservoirs thanks to the experience, the means implemented, the quality and expertise of its engineers.

WABCO air reservoirs fulfill the requirements of the European Directive 2009/105/EG and are manufactured in accordance with this Directive.

They also conform with the standard EN 286-2 which applies to the tanks of brake and the auxiliary circuit systems of the Industrial vehicles.


All the characteristics of design are defined with precision in the Directive, and WABCO air reservoirs fulfill the lawful requirements and go even beyond:

- The characteristics of the steels chosen for their ductility, their resistance and their weldability, confèrent with WABCO tanks an exceptional quality.
- The form of the shell and the end cover as well as the process of assembly allow a perfect alignment guaranteeing at the same time the quality of welding and the complete penetration of internal painting.
- The high advanced manufacturing process, welding, anti-corrosion painting, testing procedures guarantee the quality of WABCO air reservoirs.
- The manufacturing plant is certified ISO 9002, this is an additional pledge of quality of WABCO air reservoirs.


Design features

- | | |
|---|--|
| ■ Range of operating pressure (PS): | 10 ... 19 bar |
| ■ Range of temperature of service: | Steel: -50° ... +100 °C
Aluminum: -50° ... +80 °C |
| ■ Exceptional temperature (1 hour, without pressure): | +120 °C |
| ■ Volume: | 0.6 ... 100 litres |
| ■ Fluid: | Air |
| ■ Directive: | EN 286-2 |
| ■ Homologation: | EC |

Variants of metric ports



M 22x1.5



M 22x1.5
(ISO 4039-2)



AT TİP İNCELEME BELGESİ
EU TYPE EXAMINATION CERTIFICATE
MODÜL B

2014/29/AB Basit Basıncılı Kaplar Direktifi
Simple Pressure Vessel Directive 2014/29/EU
Sertifika No (Certificate Nr): DKR.SPED. 2018.B002.R.01

Modül B –Üretim Tip (Production Type) :

Modül B –Tasarım Tip (Design Type) :

İmalatçı Adı / Manufacturer (Name) : ORSAN TİCARİ ARAÇ SİSTEMLERİ LTD. ŞTİ.

Adres / Address: Türkgücü Mücavir Alan Yılmaz Alparsalan Caddesi No:67 Çorlu/TEKİRDAĞ

Ürün Tipi/ Product Type : Hava Tankı /Air Storage Tank

Muayene Rapor No/Examination Report Nr: DKR-SPED-2018-002

Onaylanmış Kuruluş No/ Notified Body No: 2360

Sertifika Yayınlanma Tarihi /Date of schedule Issue:25.04.2018

Sertifika Bitiş Tarihi / Date of expiry:25.04.2028

EK: Teknik Ek (1 sayfa)/Technical annex (1 page)

Bu belge yukarıda belirtilen tipin 2014/29/AB Basit Basıncılı Yönetmeliğinin gereklerini karşıladığını göstermektedir.

This is to certify that the type detailed above meets the requirements of the Directive 2014/29/EU simple pressure vessel with the properties.

Sertifikalandıran/Name of Certifier
Notified Body
HALİL AYDIN



Keresteciler Sitesi E Blok No:5 Kat:2 Ostim Yenimahalle/Ankara
Telefon: (312) 385 95 30 Telefaks: (312) 386 00 79

EK: Teknik Ek / Technical Annex

Design Number	Volume(lt)	Material	Working Pressure (Bar)
6T144100	(4,4.4,5,5.4,6,7,8,9,10)	S275J2	15,5
6T154501	(4,4.4,5,6,7,7.4,8,9,10,12,15)	S275J2	15,5
6T200150	(15)	S275J2	15,5
6T206230	(4,5,6,9,10,12,15,18,20,25,28,30,32,35)	S275J2	15,5
6T246410	(7.5,10,13,14,15,18,20,23,25,28,30,32,35,36,37,38,40,45,48,50)	S275J2	15,5
6T259100	(10,13,15,16,18,20,25,26,30,35,38,40,45,48,50)	S275J2	15,5
6T276415-1	(10,15,18,20,25,28,30,32,35,38,40)	S275J2	15,5
6T276415-2	(41,60)	S275J2	15,5
6T276415-3	(40,45,48,50,55,60)	S275J2	12,5
6T310410	(15,20,25,30,35,36,40,45,48,50,55,60,65,70,75,80)	S275J2 S355MC	12,5
6T396401	(30,35,40,45,50,55,60,65,70,75,80,85,90,95,100,120)	S355MC	12,5
6T3006000	(12,20,30,36,40,50,60,70)	S275J2	12,5
9T144...	(2,3,4.4)	S275J2	15,5
9T154...	(3,4,5,6,10)	S275J2	15,5
9T206...	(4,10,15,20,30)	S275J2	15,5
9T246...	(14,20,25,30,38,40,50)	S275J2	15,5
9T276...	(20,30,40,60)	S275J2	12,5
9T300...	(30,36,40,45,60)	S275J2	12,5
9T310...	(30,35,40,48,50,60,80)	S275J2 S355MC	12,5
9T396...	(40,60,80,100)	S355MC	12,5





AT TİP İNCELEME BELGESİ

EU TYPE EXAMINATION CERTIFICATE

MODÜL B

2014/29/AB Basit Basıncılı Kaplar Direktifi

Simple Pressure Vessel Directive 2014/29/EU

Sertifika No (Certificate Nr): DKR.SPED. 2018.B001

Modül B –Üretim Tip (Production Type) :

Modül B –Tasarım Tip (Design Type) :

İmalatçı Adı / Manufacturer (Name) : ORSAN TİCARİ ARAÇ SİSTEMLERİ LTD. ŞTİ.

Adres / Address: Türkgücü Mücavir Alan Yılmaz Alparsalan Caddesi No:67 Çorlu/TEKİRDAĞ

Ürün Tipi/ Product Type : Hava Tankı /Air Storage Tank

Muayene Rapor No/Examination Report Nr: DKR-SPED-2018-001

Onaylanmış Kuruluş No/ Notified Body No: 2360

Sertifika Yayınlanma Tarihi /Date of schedule Issue:25.04.2018

Sertifika Bitiş Tarihi / Date of expiry:25.04.2028

EK: Teknik Ek (1 sayfa)/Technical annex (1 page)

Bu belge yukarıda belirtilen tipin 2014/29/AB Basit Basıncılı Yönetmeliğinin gereklerini karşıladığını göstermektedir.

This is to certify that the type detailed above meets the requirements of the Directive 2014/29/EU simple pressure vessel with the properties.


Sertifika Veren/Name of Certifier

HALİL AYDOĞAN
Notified Body
2360

Keresteciler Sitesi E Blok No:5 Kat:2 Ostim Yenimahalle/Ankara
Telefon: (312) 385 95 30 Telefaks: (312) 386 00 79

EK: Teknik Ek / Technical Annex

Design Number	Volume(lt)	Material	Working Pressure (bar)
6TA1440500	(4,4,5,6,7,8,9,10,15)	AlMg4.5Mn0.7 (5083)	12,5
6TA1542000	(4,4,5,6,7,8,9,10,12,15)	AlMg4.5Mn0.7 (5083)	12,5
6TA2062000	(5,10,15,20,23,30,34,40)	AlMg4.5Mn0.7 (5083)	12,5
6TA2464000	(7,5,10,15,18,20,23,25,28,30,32,35,36,37,38,40,45,48,50)	AlMg4.5Mn0.7 (5083)	12,5
6TA2766000	(10,20,30,40,50,60)	AlMg4.5Mn0.7 (5083)	12,5
6TA3108000	(20,25,30,36,40,46,50,60,70,80)	AlMg4.5Mn0.7 (5083)	11
6TA3961000	(30,40,50,60,70,80,90,100,120)	AlMg4.5Mn0.7 (5083)	11
9TA154...	(2,3,5)	AlMg4.5Mn0.7 (5083)	12,5
9TA206...	(10,15,20,30,40)	AlMg4.5Mn0.7 (5083)	12,5
9TA246...	(15,20,23,25,27,30,40)	AlMg4.5Mn0.7 (5083)	12,5
9TA276...	(20,30,40,50,60)	AlMg4.5Mn0.7 (5083)	12,5
9TA310...	(30,40,45,46,60,80)	AlMg4.5Mn0.7 (5083)	11
9TA396...	(60,80,100)	AlMg4.5Mn0.7 (5083)	11



Air reservoirs for trucks



Steel




WABCO #			\varnothing	\longleftrightarrow L1 / L2			
950 204 005 0	4 l	12.5 bar	154 mm	257 / 130 mm	2.70 kg	M 22x1.5 (ISO 4039-2)	

Steel

WABCO #			\varnothing	\longleftrightarrow L1			
950 004 000 0	4 l	15.5 bar	144 mm	289 mm	2.80 kg	M 22x1.5 (ISO 4039-2)	




Steel

WABCO #			\varnothing	\longleftrightarrow L1 / L2			
950 410 019 0	10 l	15.5 bar	206 mm	345 / 175 mm	4.70 kg	M 22x1.5 (ISO 4039-2)	
950 722 002 0	22 l	14.5 bar	276 mm	435 / 217.5 mm	7.30 kg	M 22x1.5	

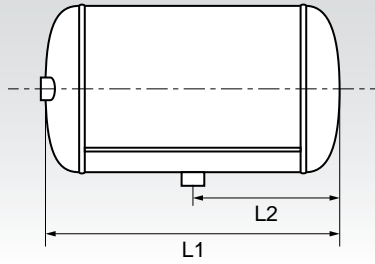

Steel




WABCO #			\emptyset	\longleftrightarrow L1 / L2			
950 020 002 0	25 l	15.5 bar	246 mm	590 / 259 mm	8.60 kg	M 22x1.5 (ISO 4039-2)	
950 020 003 0	30 l	15.5 bar	276 mm	568.5 / 284.5 mm	9.60 kg	M 22x1.5 (ISO 4039-2)	
950 020 004 0	25 l	15.5 bar	276 mm	478.5 / 239.3 mm	8.30 kg	M 22x1.5 (ISO 4039-2)	
950 020 005 0	35 l	15.5 bar	276 mm	646.5 / 323.5 mm	10.60 kg	M 22x1.5 (ISO 4039-2)	
950 020 006 0	20 l	15.5 bar	246 mm	480.5 / 240 mm	7.30 kg	M 22x1.5 (ISO 4039-2)	
950 020 007 0	25 l	15.5 bar	246 mm	588.5 / 294.5 mm	8.80 kg	M 22x1.5 (ISO 4039-2)	
950 020 009 0	30 l	12.5 bar	310 mm	446 / 223 mm	9.00 kg	M 22x1.5 (ISO 4039-2)	
950 020 010 0	40 l	12.5 bar	310 mm	588 / 294 mm	11.00 kg	M 22x1.5 (ISO 4039-2)	

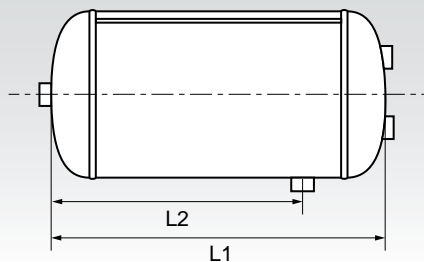

Steel




WABCO #			\emptyset	\longleftrightarrow L1 / L2			
950 730 022 0	30 l	14.5 bar	276 mm	542 / 369 mm	9.10 kg	M 22x1.5 (ISO 4039-2)	

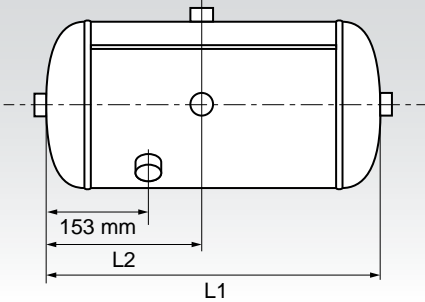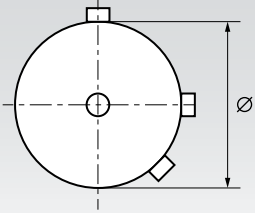

Steel


WABCO #							
950 836 000 0	36 l	12.5 bar	300 mm	577 / 254 mm	10.60 kg	M 22x1.5 (ISO 4039-2)	

Steel

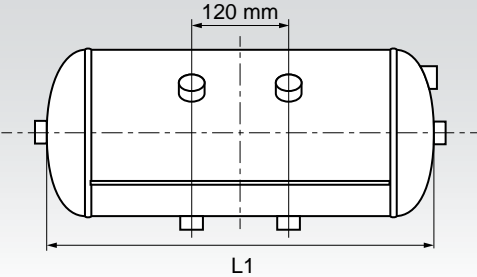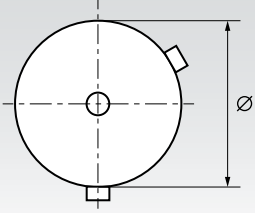
WABCO #							
950 530 000 0	30 l	13.0 bar	246 mm	673 mm	10.00 kg	M 22x1.5 (ISO 4039-2)	

Air reservoirs for trailer

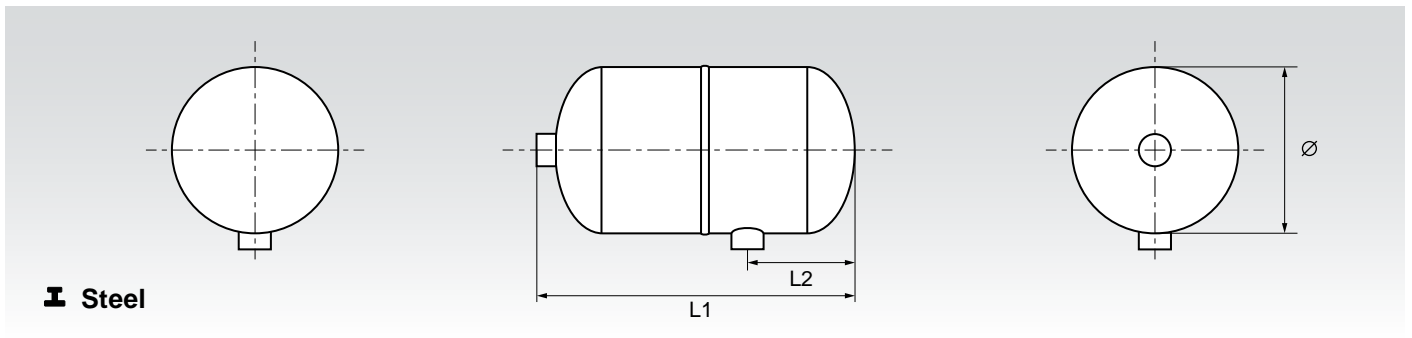


Steel

WABCO #							
951 005 010 0	1 l	15.5 bar	102 mm	170 / 50 mm	1.13 kg	M 22x1.5	

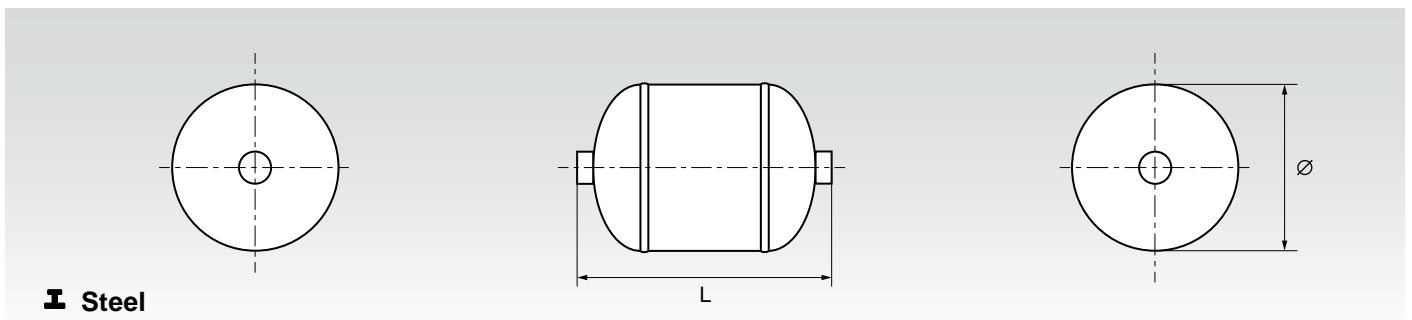

Steel

WABCO #							
950 001 003 0	0.60 l	15.5 bar	102 mm	129 mm	0.82 kg	½"-14 NPSI	
951 002 157 0	4.25 l	15.5 bar	206 mm	192 mm	2.80 kg	M 22x1.5	

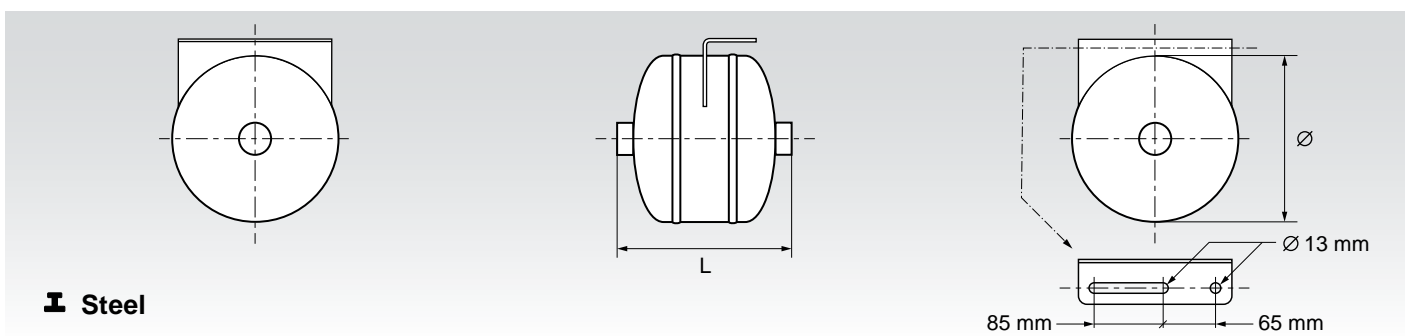

Steel

WABCO #							
950 404 000 0	4.00 l	12.5 bar	206 mm	192 mm	4.40 kg	M 22x1.5 (ISO 4039-2)	



Steel










WABCO #			\varnothing	\longleftrightarrow L1 / L2			
950 204 004 0	4.0 l	15.5 bar	154 mm	246 / 123 mm	2.7 kg	M 22x1.5 (ISO 4039-2)	
950 210 000 0	10.0 l	20.0 bar	154 mm	583 / 291.5 mm	5.3 kg	M 22x1.5 (ISO 4039-2)	


Steel








WABCO #			\varnothing	\longleftrightarrow L1 / L2			
950 207 000 0	7.4 l	15.5 bar	154 mm	485 / 180 mm	4.25 kg	M 22x1.5	
950 207 001 0	7.7 l	15.5 bar	154 mm	486 / 196 mm	4.30 kg	M 22x1.5 (ISO 4039-2)	


Steel

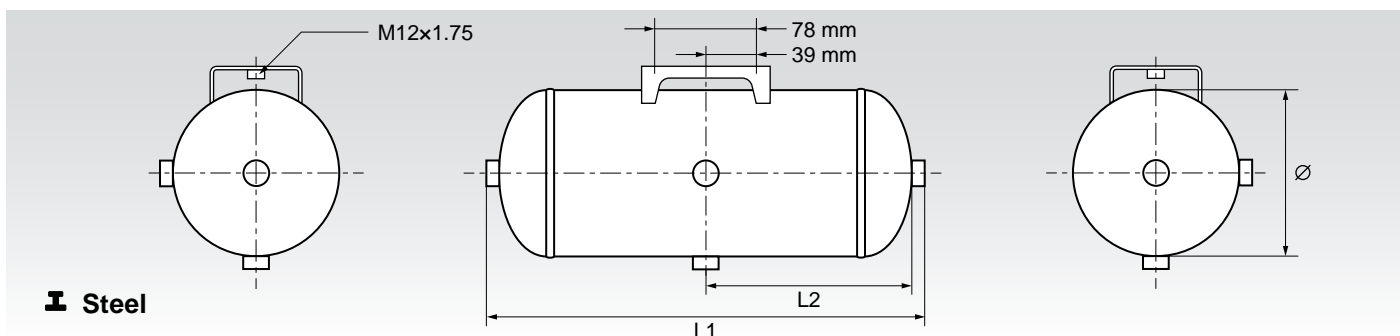






WABCO #			\varnothing	\longleftrightarrow L1 / L2			
950 520 017 0	20 l	15.5 bar	246 mm	471 / 235.5 mm	7.2 kg	M 22x1.5 (ISO 4039-2)	
950 820 001 0	20 l	12.5 bar	300 mm	381 / 177.5 mm	6.8 kg	M 22x1.5	
950 628 001 0	28 l	15.5 bar	246 mm	665 / 319.5 mm	9.2 kg	M 22x1.5	



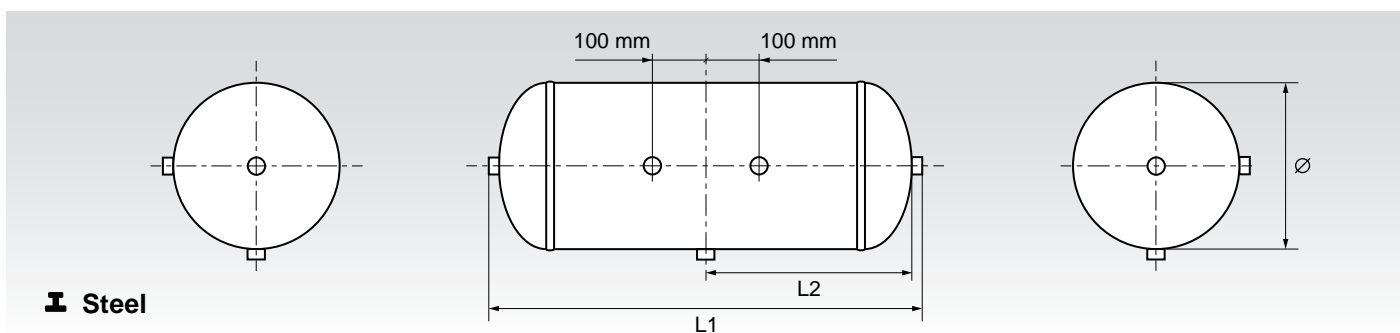
WABCO #			\emptyset	\longleftrightarrow L1 / L2			
950 630 006 0	30 l	15.5 bar	246 mm	718 / 346 mm	9.7 kg	M 22x1.5	
950 830 004 0	30 l	12.5 bar	300 mm	528 / 251 mm	9.0 kg	M 22x1.5	
950 845 002 0	45 l	12.5 bar	300 mm	743 / 358.5 mm	12.2 kg	M 22x1.5	
950 860 006 0	60 l	12.5 bar	300 mm	934 / 467 mm	15.5 kg	M 22x1.5 (ISO 4039-2)	



WABCO #			\emptyset	\longleftrightarrow L1 / L2			
950 205 000 0	5 l	15.5 bar	154 mm	351 / 158.5 mm	3.7 kg	M 22x1.5	
950 204 003 0	5 l	20.0 bar	154 mm	341 / 154.5 mm	3.6 kg	M 22x1.5 (ISO 4039-2)	





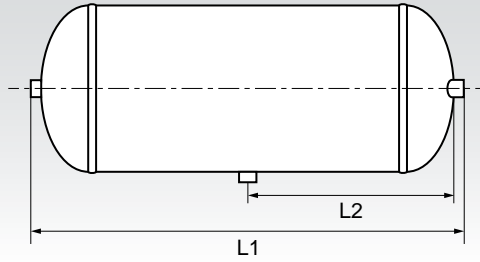











WABCO #			\emptyset	\longleftrightarrow L1 / L2			
950 845 000 0	45 l	12.5 bar	300 mm	743 / 355.5 mm	12.5 kg	M 22x1.5 (ISO 4039-2)	
950 860 007 0	60 l	12.5 bar	300 mm	950 / 459 mm	15.6 kg	M 22x1.5 (ISO 4039-2)	





Steel

WABCO #							
	Capacity	Pressure	Ø	L1 / L2	Weight	Thread	Mounting
950 405 001 0	4.5 l	15.5 bar	206 mm	185 / 87 mm	3.0 kg	M 22x1.5	
950 406 002 0	6 l	15.5 bar	206 mm	241 / 115 mm	3.4 kg	M 22x1.5	
950 405 007 0	10 l	15.5 bar	206 mm	370 / 175 mm	4.7 kg	M 22x1.5	
950 405 006 0	10 l	15.5 bar	206 mm	355 / 172 mm	4.5 kg	M 22x1.5	
950 410 000 0	10 l	15.5 bar	206 mm	355 / 163 mm	5.0 kg	M 22x1.5	
950 410 011 0	10 l	15.5 bar	206 mm	370 / 175 mm	5.0 kg	M 22x1.5	
950 415 055 0	15 l	15.5 bar	206 mm	527 / 257 mm	6.3 kg	M 22x1.5 (ISO 4039-2)	
950 515 003 0	15 l	15.5 bar	246 mm	380 / 181 mm	5.9 kg	M 22x1.5	
950 516 004 0	16 l	15.5 bar	258 mm	411 / 197 mm	6.0 kg	M 22x1.5	
950 408 001 0	20 l	15.5 bar	206 mm	693 / 333.5 mm	8.2 kg	M 22x1.5 (ISO 4039-2)	
950 507 001 0	20 l	15.5 bar	246 mm	495 / 234.5 mm	7.5 kg	M 22x1.5 (ISO 4039-2)	
950 520 000 0	20 l	15.5 bar	246 mm	508 / 241 mm	7.5 kg	M 22x1.5	
950 720 008 0	20 l	14.5 bar	276 mm	414 / 197.5 mm	6.7 kg	M 22x1.5 (ISO 4039-2)	
950 722 002 0	22 l	14.5 bar	276 mm	452 / 216.5 mm	7.2 kg	M 22x1.5	
950 525 000 0	25 l	15.5 bar	246 mm	601 / 287.5 mm	8.6 kg	M 22x1.5 (ISO 4039-2)	
950 527 005 0	27 l	15.5 bar	258 mm	645 / 178.5 mm	8.9 kg	M 22x1.5	
950 430 001 0	30 l	15.5 bar	206 mm	992 / 490.5 mm	11.2 kg	M 22x1.5	
950 510 004 0	30 l	15.5 bar	246 mm	709 / 341.5 mm	10.0 kg	M 22x1.5 (ISO 4039-2)	
950 730 021 0	30 l	14.5 bar	276 mm	583 / 278.5 mm	9.4 kg	M 22x1.5 (ISO 4039-2)	
950 537 000 0	37 l	15.5 bar	246 mm	862 / 418 mm	11.7 kg	M 22x1.5 (ISO 4039-2)	
950 540 000 0	40 l	15.5 bar	246 mm	927 / 450.5 mm	12.5 kg	M 22x1.5 (ISO 4039-2)	

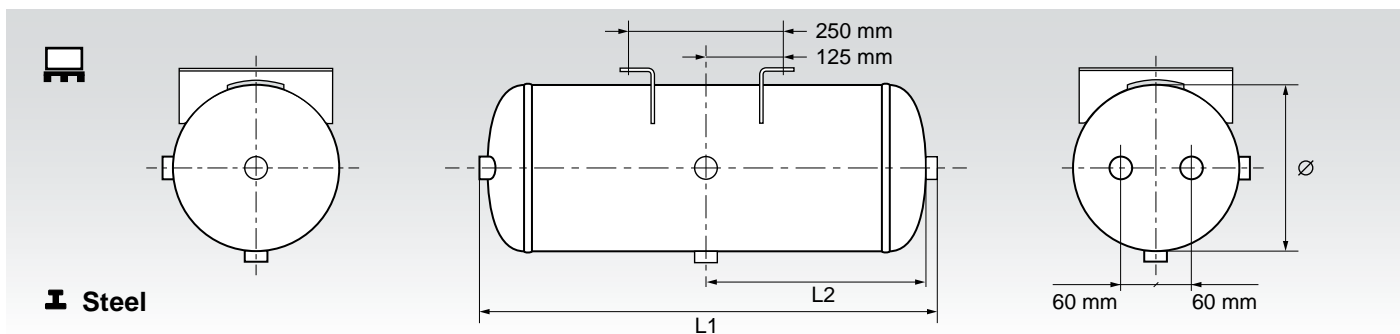WABCO #			\varnothing	\longleftrightarrow L1 / L2			
950 712 001 0	40 l	14.5 bar	276 mm	758 / 366 mm	11.6 kg	M 22x1.5 (ISO 4039-2)	
950 911 001 0	40 l	12.5 bar	310 mm	618 / 296 mm	11.0 kg	M 22x1.5 (ISO 4039-2)	
950 718 001 0	60 l	14.5 bar	276 mm	1108 / 541 mm	16.4 kg	M 22x1.5 (ISO 4039-2)	
950 917 001 0	60 l	12.5 bar	310 mm	893 / 433.5 mm	17.5 kg	M 22x1.5 (ISO 4039-2)	
950 020 014 0	60 l	10.0 bar	396 mm	580 / 277 mm	13.9 kg	M 22x1.5 (ISO 4039-2)	
950 560 002 0	60 l	15.5 bar	246 mm	1365 / 674 mm	18.0 kg	M 22x1.5	
950 025 002 0	80 l	10.0 bar	396 mm	750 / 362 mm	17.2 kg	M 22x1.5 (ISO 4039-2)	
950 100 003 0	100 l	10.0 bar	396 mm	915 / 444.5 mm	25.0 kg	M 22x1.5 (ISO 4039-2)	



WABCO #			\varnothing	\longleftrightarrow L1 / L2			
950 515 000 0	15 l	15.5 bar	246 mm	396 / 185 mm	7.5 kg	M 22x1.5	
950 740 000 0	40 l	12.5 bar	276 mm	767 / 370.5 mm	13.5 kg	M 22x1.5	
950 960 001 0	60 l	12.5 bar	310 mm	898 / 436 mm	17.5 kg	M 22x1.5	
950 060 000 0	60 l	12.5 bar	396 mm	575 / 274.5 mm	20.0 kg	M 22x1.5	
950 080 000 0	80 l	12.5 bar	396 mm	751 / 362.5 mm	24.0 kg	M 22x1.5	

 Available per palette only



Steel




WABCO #			\varnothing	\longleftrightarrow L1 / L2			
950 630 001 0	30 l	12.5 bar	246 mm	708 / 341 mm	10.4 kg	½"-14 NPSI	

Steel

WABCO #			\varnothing	\longleftrightarrow L1 / L2			
950 630 002 0	30 l	12.5 bar	246 mm	708 / 110 mm	10.4 kg	½"-14 NPSI	




Steel

WABCO #			\varnothing	\longleftrightarrow L1 / L2			
950 530 011 0	30 l	15.5 bar	246 mm	718 / 343 mm	9.8 kg	M 22x1.5 (ISO 4039-2)	

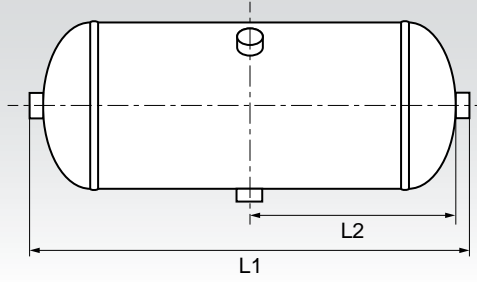




Steel

WABCO #							
950 620 007 0	20 l	15.5 bar	246 mm	504 / 239 mm	7.1 kg	M 22x1.5	

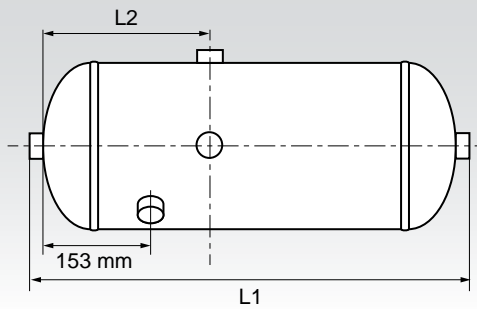


Steel

WABCO #							
950 836 001 0	36	12.5 bar	300 mm	603 / 254 mm	10.2 kg	M 22x1.5	

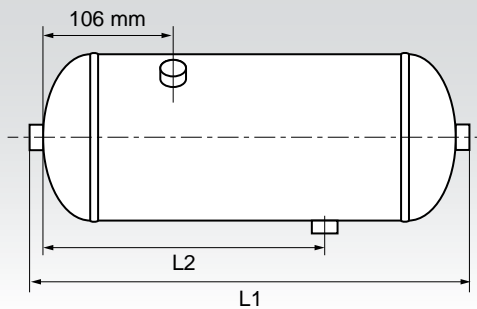


Steel

WABCO #							
950 310 001 0	10 l	15.5 bar	206 mm	386 / 254.5 mm	4.9 kg	½" NPSI	

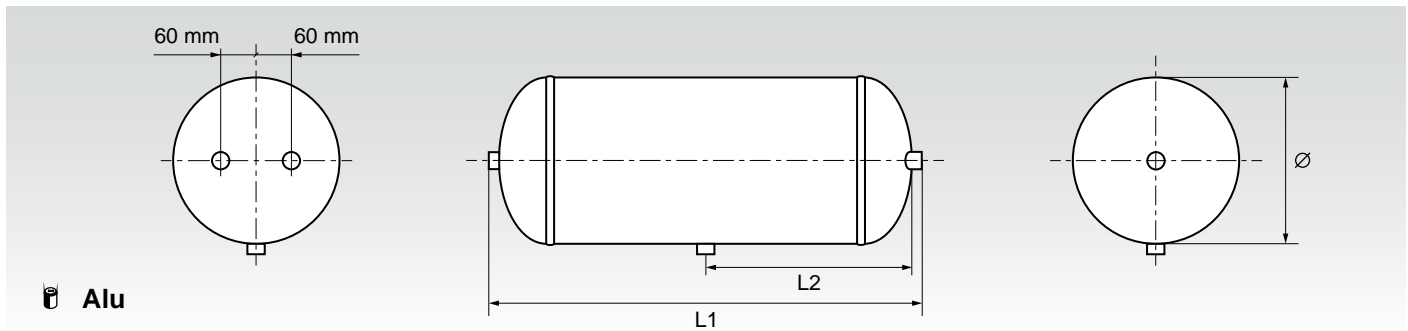


WABCO #			Ø	↔ L1 / L2			
950 530 904 0	30 l	12.5 bar	246 mm	724 / 354 mm	5.0 kg	M 22x1.5 (ISO 4039-2)	
950 740 907 0	40 l	12.5 bar	276 mm	766 / 370 mm	6.9 kg	M 22x1.5 (ISO 4039-2)	
950 910 901 0	60 l	11.0 bar	310 mm	902 / 438 mm	10.5 kg	M 22x1.5 (ISO 4039-2)	
950 009 901 0	80 l	11.0 bar	396 mm	745 / 359.5 mm	9.2 kg	M 22x1.5 (ISO 4039-2)	

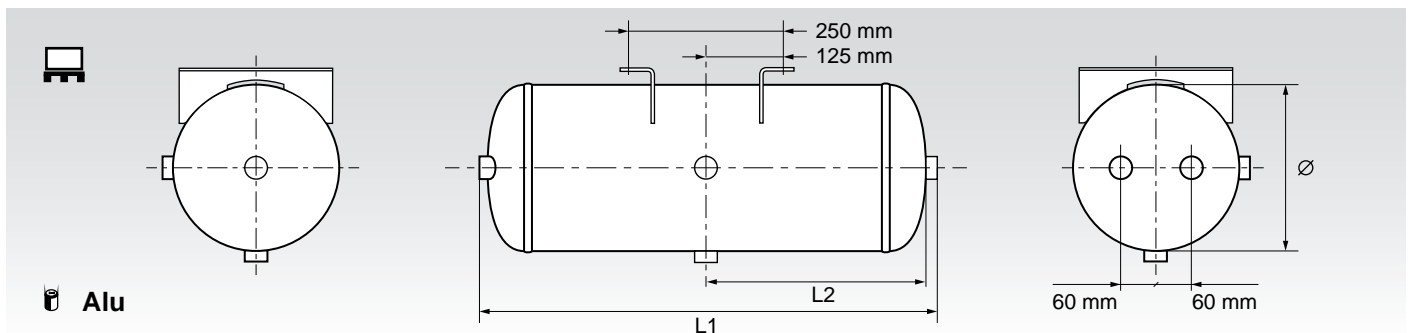


WABCO #			Ø	↔ L1 / L2			
950 520 900 0	20 l	12.5 bar	246 mm	504 / 239 mm	4.25 kg	M 22x1.5	
950 530 900 0	30 l	12.5 bar	246 mm	724 / 349 mm	5.75 kg	M 22x1.5	
950 740 900 0	40 l	12.5 bar	276 mm	768 / 371 mm	8.00 kg	M 22x1.5	
950 960 900 0	60 l	11.0 bar	310 mm	895 / 434.5 mm	10.50 kg	M 22x1.5	
950 060 900 0	60 l	11.0 bar	396 mm	609 / 291.5 mm	9.50 kg	M 22x1.5	
950 060 904 0	60 l	11.0 bar	396 mm	609 / 291.5 mm	9.50 kg	M 22x1.5	
950 080 900 0	80 l	11.0 bar	396 mm	749 / 361.5 mm	11.00 kg	M 22x1.5	
950 000 900 0	100 l	11.0 bar	396 mm	919 / 446.5 mm	13.00 kg	M 22x1.5	

Available per palette only

Clamp bands / Drain valves

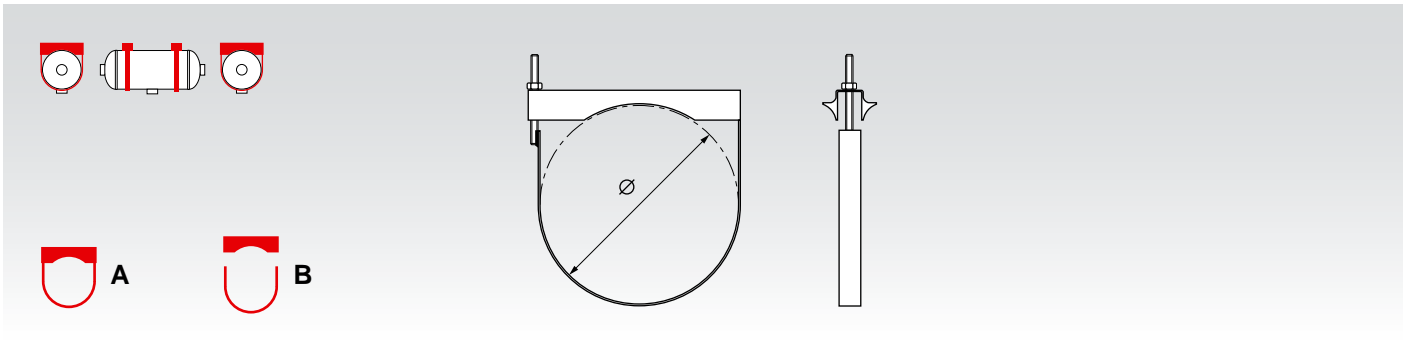

A WABCO #	B WABCO #	Ø	
451 999 206 2	950 405 351 2	206 mm	
451 999 246 2	950 515 351 2	246 mm	
451 999 276 2	950 720 351 2	276 mm	
451 999 310 2	950 949 351 2	310 mm	
451 999 396 2	950 001 351 2	396 mm	

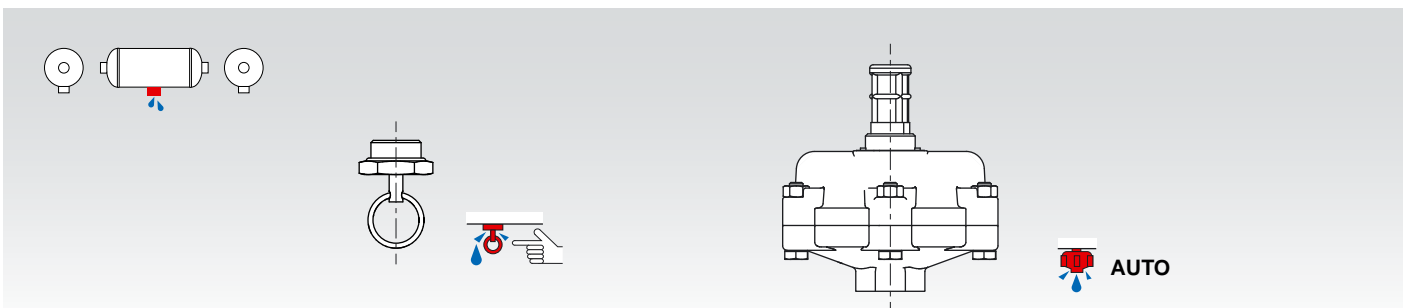

WABCO #		Type	
934 300 001 0	M 22x1.5	manual (w/o ring)	
934 300 002 0	R 1/2"	manual, with sealing	
934 300 003 0	M 22x1.5	manual	
934 300 038 0	M 22x1.5	manual, with sealing	
934 301 000 0	M 22x1.5	automatic ($\Delta p < 0.4$ bar)	
934 301 003 0	M 22x1.5	automatic ($\Delta p = 0.5 \pm 0.2$ bar)	

Index

WABCO #		WABCO #		WABCO #	
451 999 206 2	19	950 204 005 0	8	950 560 002 0	15
451 999 246 2	19	950 205 000 0	13	950 620 007 0	17
451 999 276 2	19	950 207 000 0	12	950 628 001 0	12
451 999 310 2	19	950 207 001 0	12	950 630 001 0	16
451 999 396 2	19	950 210 000 0	12	950 630 002 0	16
934 300 001 0	19	950 310 001 0	17	950 630 006 0	13
934 300 002 0	19	950 404 000 0	11	950 712 001 0	15
934 300 003 0	19	950 405 001 0	14	950 718 001 0	15
934 300 038 0	19	950 405 006 0	14	950 720 008 0	14
934 301 000 0	19	950 405 007 0	14	950 720 351 2	19
934 301 003 0	19	950 405 351 2	19	950 722 002 0	8, 14
950 000 900 0	18	950 406 002 0	14	950 730 021 0	14
950 001 003 0	11	950 408 001 0	14	950 730 022 0	9
950 001 351 2	19	950 410 000 0	14	950 740 000 0	15
950 004 000 0	8	950 410 011 0	14	950 740 900 0	18
950 009 901 0	18	950 410 019 0	8	950 740 907 0	18
950 020 002 0	9	950 415 055 0	14	950 820 001 0	12
950 020 003 0	9	950 430 001 0	14	950 830 004 0	13
950 020 004 0	9	950 507 001 0	14	950 836 000 0	10
950 020 005 0	9	950 510 004 0	14	950 836 001 0	17
950 020 006 0	9	950 515 000 0	15	950 845 000 0	13
950 020 007 0	9	950 515 003 0	14	950 845 002 0	13
950 020 009 0	9	950 515 351 2	19	950 860 006 0	13
950 020 010 0	9	950 520 000 0	14	950 860 007 0	13
950 020 014 0	15	950 520 017 0	12	950 910 901 0	18
950 025 002 0	15	950 520 900 0	18	950 911 001 0	15
950 060 000 0	15	950 525 000 0	14	950 917 001 0	15
950 060 900 0	18	950 527 005 0	14	950 949 351 2	19
950 060 904 0	18	950 530 000 0	10	950 960 001 0	15
950 080 000 0	15	950 530 011 0	16	950 960 900 0	18
950 080 900 0	18	950 530 900 0	18	951 002 157 0	11
950 100 003 0	15	950 530 904 0	18	951 005 010 0	11
950 204 003 0	13	950 537 000 0	14		
950 204 004 0	12	950 540 000 0	14		

Cross references


OE	OE #	WABCO #
DAF	1733544	950 836 000 0
MAN	81.514.010.239 81.514.016.013	950 930 000 0
MAN	81.514.010.241 81.514.016.015	950 940 010 0
Mercedes	A 006 432 3401	950 004 000 0
Mercedes	A 006 432 4301	950 520 018 0
Mercedes	A 006 432 4401	950 525 006 0
Mercedes	A 006 432 5301	950 725 006 0

OE	OE #	WABCO #
Mercedes	A 006 432 5401	950 730 023 0
Mercedes	A 006 432 5601	950 735 000 0
Mercedes	A 007 432 0301	950 525 007 0
Mercedes	A 007 432 1101	950 410 019 0
Renault	5010525446	950 530 000 0
Scania	1357950 488217	950 730 022 0



AFTERMARKET

WHEN THE WORLD RELIES ON
YOU, YOU CAN RELY ON US.

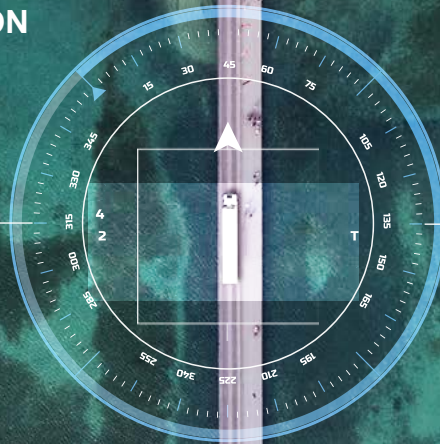

AFTERMARKET OF PROVEN PARTS
REPAIR SOLUTIONS
DIAGNOSTIC TOOLS
TRAINING
RE-MANUFACTURING SERVICES
TELEMATICS
FLEET MANAGEMENT SOLUTIONS

Information on WABCO products can be found in our Customer Centre
(www.wabco-customercentre.com) by entering the product number in the “Search Products” field.

Please contact your WABCO partner for further information: www.wabco-customercentre.com/catalog/en/ALF

ZF Friedrichshafen AG

ZF is a global technology company and supplies systems for passenger cars, commercial vehicles and industrial technology, enabling the next generation of mobility. ZF allows vehicles to see, think and act. In the four technology domains Vehicle Motion Control, Integrated Safety, Automated Driving, and Electric Mobility, ZF offers comprehensive solutions for established vehicle manufacturers and newly emerging transport and mobility service providers. ZF electrifies different kinds of vehicles. With its products, the company contributes to reducing emissions and protecting the climate.

ZF, which acquired WABCO Holdings Inc. on May 29, 2020, now has 162,000 employees worldwide with approximately 260 locations in 41 countries. In 2019, the two then-independent companies achieved sales of €36.5 billion (ZF) and \$3.4 billion (WABCO).

With the integration of WABCO, the leading global supplier of braking control systems and other advanced technologies that improve the safety, efficiency and connectivity of commercial vehicles ZF will create a new level of capability to pioneer the next generation of solutions and services for original equipment manufacturers and fleets globally. WABCO, with almost 12,000 people in 40 locations worldwide, will now operate under the ZF brand as its new Commercial Vehicle Control Systems division.

WABCO