

A


B

Non è permesso consegnare o terzi o riprodurre questo documento, né utilizzare il contenuto o renderlo comunque noto a terzi senza permesso scritto dalla WABCO. È vietata espressamente la ristampa, la traduzione, la riproduzione, la distribuzione o l'uso non autorizzato. E' fatto riserva di tutti i diritti, espressi o non, di brevetto o di marchio. Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express written permission from WABCO. The reproduction, translation, distribution or use of the contents of this document without the express written permission of WABCO are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement à cette règle constitue un abus, éventuellement engageant son auteur au versant de dommages et intérêts. Tous droits de propriété industrielle réservés, notamment en matière de brevets et de marques. Weitergabe sowie Vervielfältigung dieser Unterlagen, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen stellen einen strafrechtlichen Missbrauch dar und verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.


NOMINAL VALUE A ***	OUTER Ø B	INNER Ø C	WALL THICKNESS D	BENDING RADIUS E	MATERIAL ** (ACC. TO DIN 74324)		MANUFACTURER'S SYMBOL G	DATE OF MANUFACTURE H	TRADEMARK I	MASS	COLOUR
					PREFERABLE	ALTERNATIVE					
10x1.5 (COIL 100 m)	10	7	-	-	PA11-PHL PA12-PHL PA12-HIPHL	PA11-PHLY PA12-PHLY	6-DIGIT SAP-SUPPLIER NO.	ACC. TO JED-226, METHOD B5 (YYWW)	ACC. TO JED-369, HEIGHT APPROX. 5 mm, IN A CONTRASTING COLOR APPROX. EVERY 300 TO 400 mm	40.86 g/m 4.09 kg PER ROLL	BLACK

MARKING:

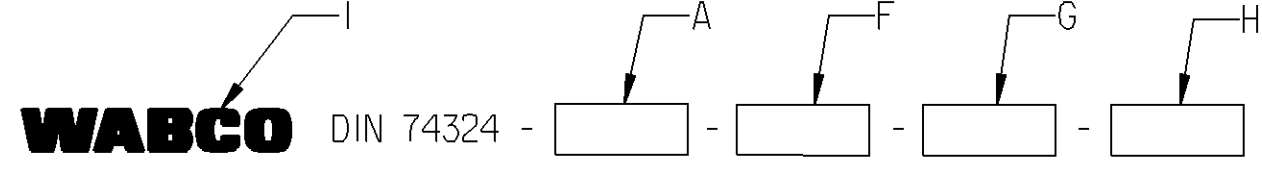

MEDIUM: AIR
 MASS: SEE TABLE
 COLOUR: SEE TABLE

- * THERMAL RANGE OF APPLICATION: ACC. TO DIN 74324
- * SHORT-TERM RESISTANCE TO HEAT: ACC. TO DIN 74324
- * PERMISSIBLE WORKING PRESSURE: ACC. TO DIN 74324
- *** NOMINAL DIAMETER OF PIPE NOT LISTED IN DIN 74324, BUT ALL OTHER CHARACTERISTICS ARE ACCORDING TO DIN VALUES

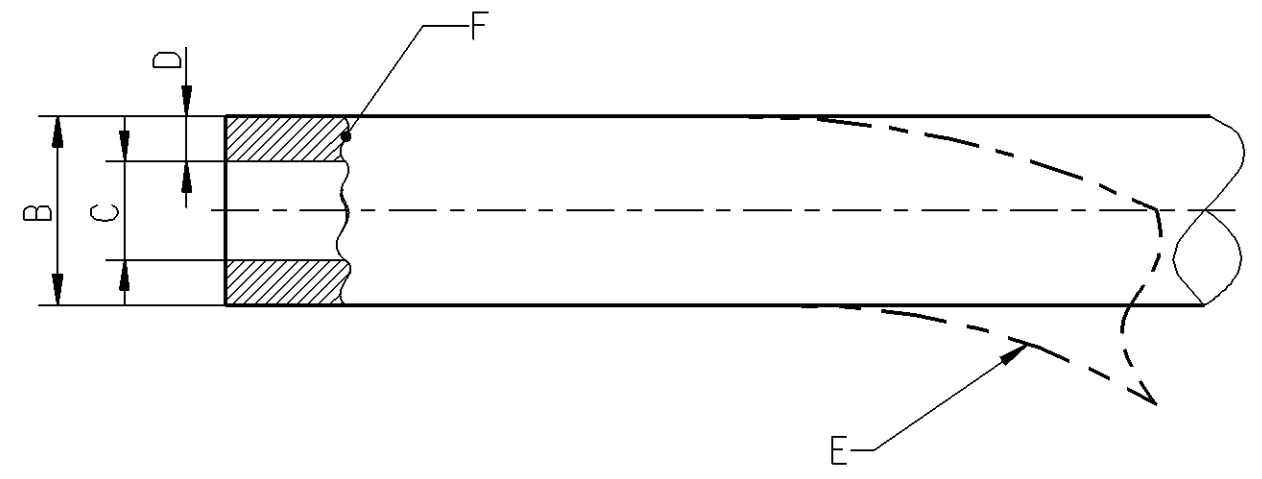

GENERAL SPECIFICATIONS: DIN 74324; JED-226; JED-271; JED-367; JED-369; JED-762

General Specification: JED-334-0, Size ISO 14405-1 E		Copyright WABCO®		WABCO			
Further Technical Data: 893 000 001 0		Date: _____ Signature: _____					
Doc. Code: _____ Sheet: _____ To: _____		2012-10-12		Nerling		Pipe	
General Tolerances JED-261		2012-10-15		Luechou			
Range of Nominal Dimensions (± mm)		Expert		Kaufmann			
Class 1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	±3°		
Fine	0.5	1.0	1.5	2.0			
Medium	1.0	2.0	3.0	4.0			
Coarse	2.0	3.5	5.0	6.5			
Tapped Holes acc. -		A 2		Pro/E			
1) Tolerance Class Applied Crossmarked		ECN-No. _____		Revision _____		Techn. Resp. _____	
		Material No. 828 002 110 6		Date of first issue: 2012-10-15		Doc. Code Language Sheet	
		005 EN 1/1		Replacement for			

* INDICATED VALUES ARE GUIDELINE VALUES
 ** SEE RELEASE OF SUPPLIER, DOC CODE 050

A

B

C

D

E

F

G

H