

Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituirà un evidente abuso e comporterà il risarcimento dei danni subiti. E' fatto riserva di tutti i diritti derivanti da brevetti o modelli.

Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Contrivention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Weitergabe sowie Vervielfaeligung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdruecklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

|                       |     |     |              |          |                |               |       |  |                       |        |
|-----------------------|-----|-----|--------------|----------|----------------|---------------|-------|--|-----------------------|--------|
| 1                     | 2   | 3   | 4            | 5        | 6              | 7             | 8     |  |                       |        |
| NOMINAL VALUE         | A   | B   | C            | D        | MATERIAL       | E             | F     | G  | MASS                  | COLOUR |
| 11x3,5<br>(ROLL 40 m) | Ø18 | Ø11 | 3.5±0.5<br>C | MIN. R70 | ACC. DIN 74310 | SUPPLIER LOGO | WW YY | ACC. TO JED-369,<br>HEIGHT APPROX. 5 mm,<br>IN A CONTRASTING COLOR<br>APPROX. EVERY<br>500 mm<br>C | 9.64 kg PER ROLL<br>C | BLACK  |

**MEDIUM:**  
**MEDIUM:**  
**FLUIDE:**  
**FLUIDO:**

**AIR**  
**LUFT**  
**AIR**  
**AIRA**

**THERMAL RANGE OF APPLICATION:**  
**THERMISCHER ANWENDUNGSBEREICH:** -40 °C TO +70 °C  
**GAMME D'APPLICATION THERMIQUE:**  
**CAMPO TERMICO D'APPLICAZIONE:**

**SHORT-TERM RESISTANCE TO HEAT:**  
**KURZZEITIG:**  
**RESISTANCE THERMIQUE TEMPORAIRE:**  
**RESISTENZA TERMICA PER BREVE PERIODO:**

**ADMISSIBLE WORKING PRESSURE:**  
**ZULAESSIGER BERTRIEBSDRUCK:** Pe < 10 bar  
**PRESSION D'UTILISATION PERMISSIBLE:**  
**PRESSIONE DI ESERCIZIO PERMISSIBLE:**

**MARKING:**  
**MARKIERUNG:** **WABCO**  
**MARQUAGE:**  
**MARCATURA:**

DIN74310 - 11 - WWYY - SUPPLIER LOGO  
C


G TRADEMARK ACC. TO JED-369 - HEIGHT APPROX. 5 mm  
IN A CONTRASTING COLOR

**CLEANLINESS REQUIREMENT:**  
NO PARTICLES >1MM ALLOWED ACC. TO  
MANDATORY STANDARD: JED-334 AND JED-593

AREA: FOR THE WHOLE PART (SPECIAL AGREEMENTS POSSIBLE;  
TO BE AGREED WITH PRODUCT ENGINEERING)

GENERAL SPECIFICATION: DIN74310 ; JED-848 ; JED-762 ; JED-220  
VALIDATED IN ACCORDANCE WITH DIN 74310

**FURTHER TECHNICAL DATA: 893 000 001 0, DOC-CODE 035  
828 876 500 0, DOC-CODE 035**

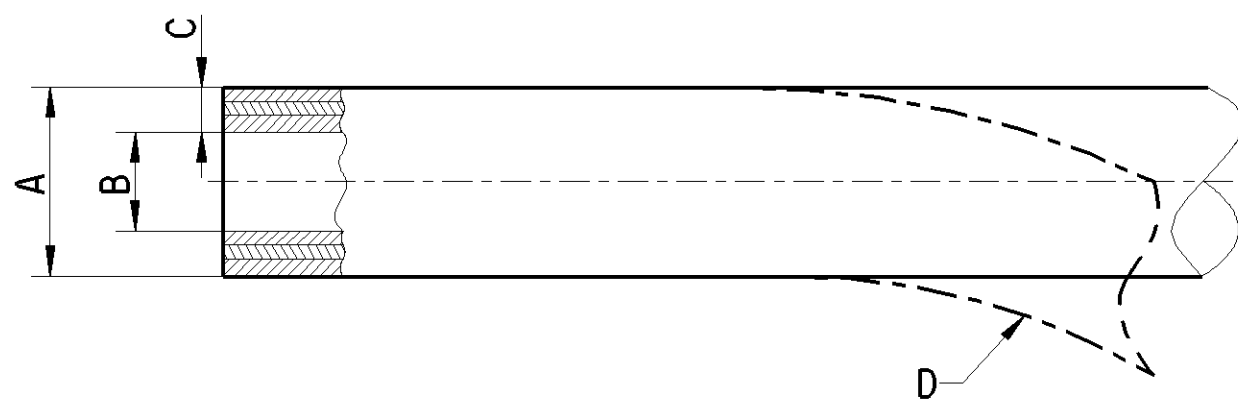

|   |        |                  |                      |   |  |                                      |  |
|---|--------|------------------|----------------------|---|--|--------------------------------------|--|
| General Specification: JED-334-1, Size ISO 14405 LP |        | Copyright WABCO® |                      | <b>WABCO</b>  |  |                                      |  |
| Further Technical Data:                             |        | Date             | Signature            |   |  |                                      |  |
| Doc. Code:  | Sheet: | To               | Drawn                | HOSE<br>SCHLAUCH<br>TUYAU FLEXIBLE<br>TUBO FLESSIBILE |  |                                      |  |
| General Tolerances JED-261                          |        |                  | 2021-02-04           |   |  | Bolago                               |  |
| Range of Nominal Dimensions ( ± mm)                 |        |                  | Checked              | 2021-02-04  |  |                                      |  |
| Class 1)  | ≤ 50   | > 50<br>≤ 180    | > 180<br>≤ 400       |   |  | > 400                                | Szczulkowski                           |
| Fine  |        | 0.5              | 1.0                  | 1.5   | 2.0                                    | Material No.<br><b>828 877 011 6</b> |  |
| Medium  | X      | 1.0              | 2.0                  | 3.0   | 4.0                                    |                                      | Date of first issue: <b>2012-10-11</b> |
| Coarse  |        | 2.0              | 3.5                  | 5.0   | 6.5                                    |                                      |  |
| Tapped Holes acc. JED-152                           |        |                  | Mass                 | Scale   | Date of first issue: <b>2012-10-11</b> |                                      |  |
| 1) Tolerance Class Applied Crossmarked              |        |                  | see table<br>KG      | /   | Doc.Code<br>005                        |                                      |  |
|   |        |                  | Size                 | CAD System  | Language<br>ML                         |                                      |  |
|   |        |                  | A 3                  | CREO  | Sheet<br>1/1                           |                                      |  |
|   |        |                  | ECN-No.<br>178920    |   | Revision<br>7 X C                      |                                      |  |
|   |        |                  | Techn. Resp.<br>5690 |   | Replacement for<br>-                   |                                      |  |