



Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Toutre Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Controvention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Weitergabe sowie Vervielfaeltigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdruecklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

1	2	3	4	5	6	7	8
A	B	C	D				
Hex.28	M22x1.5 tightening torque: 34 Nm (40 Nm)	7	with o-ring				

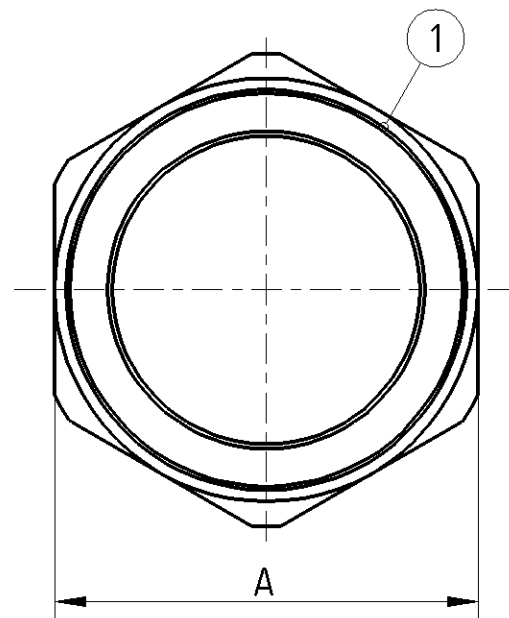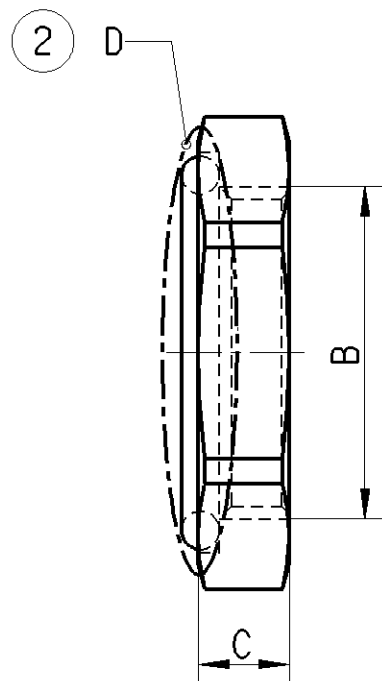

Cleanliness requirement:

No particles >1mm allowed acc. to mandatory standard:
JED-334 and JED-593

Area: for the whole part (Special agreements possible;
to be agreed with Product Engineering)

Material:

- 1 CuZn
- 2 EPDM


Suitable for use in air brake systems for commercial vehicles

General Specification : JED-762 ; JED-622 ; JED-271 ; JED-220

Engineering related agreements with Supplier have to be mentioned in the "Release of Supplier"


For use in application in compressed air systems in commercial vehicles :

- with compressed air acc. JED-848
- at working conditions:
 - -40 °C ... 100 °C
 - max. 13 bar



1:1

General Specification: JED-334-O , Size ISO 14405-1 E						Copyright WABCO®		WABCO Locking Nut						
Further Technical Data: 893 000 001 O, doc code 035						Date							Signature	
Doc. Code:			Sheet: To			Drawn								
			2015-08-05			Szczutkowski								
			Checked											
			2015-10-05			Luechau								
General Tolerances						Expert								
Range of Nominal Dimensions (± mm)						Kaufmann								
Class 1)		≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400									
Fine	X	0.5	1.0	1.5	2.0		Mass	Scale	Material No.					
Medium		1.0	2.0	3.0	4.0		0.018 KG	2:1 (1:1)	891 503 076 2					
Coarse		2.0	3.5	5.0	6.5		Size	CAD System						
Tapped Holes acc.						A 3		Pro/E		ECN-No.	Revision	Techn. Resp.	Replacement for	
1) Tolerance Class Applied Crossmarked										-		5790		



100mm