



Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzarne il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituirà un evidente abuso e comporterà il risarcimento dei danni subiti. E' fatto riserva di tutti i diritti derivanti da brevetti o modelli.

Toute Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Weitergabe sowie Vervielfaeligung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdruecklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.


1	2	3			4			5		
Part number	Part name	A	B	C	D	E	F	G	H	Weight [g] Theoretical
Tolerance:				±0.3	Min.	±0.3				-
893 104 057 4	Push-in coupling	M16x1.5	M10x1	20	10	26	-	-	22	(35)
893 022 022 2	Male Plug	M14x1.5	-	9	-	14 [Ⓐ]	(1.5)	(20.3)	20	(18) [Ⓐ]
893 104 063 4	Bulkhaed	-	M12x1.5	-	-	17	-	-	18	(24)

893 104 057 4

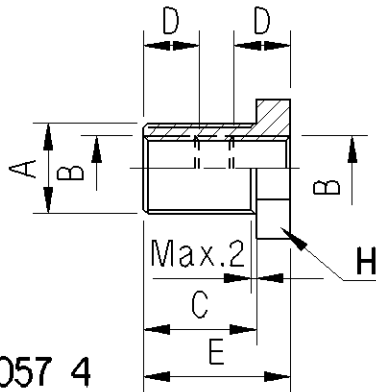


1:1

893 022 022 2


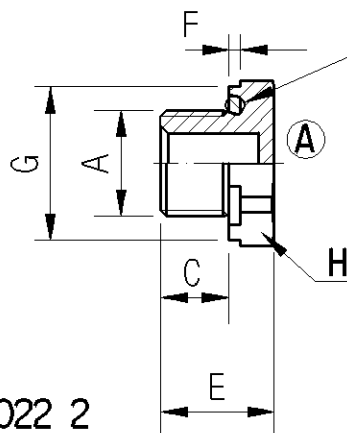


PART SUPPLIED WITH
O-RING 13X2



1:1

893 104 063 4



1:1

CLEANLINESS REQUIREMENT:

NO PARTICLES >1MM ALLOWED ACC. TO MANDATORY STANDARD JED-334 AND JED-593

AREA: FOR THE WHOLE PART (SPECIAL AGREEMENTS POSSIBLE, TO BE AGREED WITH PRODUCT ENGINEERING)

GENERAL SPECIFICATION : JED-762 ; JED-622 ; JED-220

ENGINEERING RELATED AGREEMENTS WITH SUPPLIER HAVE TO BE MENTIONED IN THE "RELEASE OF SUPPLIER"

M10x1.5 TORQUE WITHOUT LUBRICATION NOMINAL 15Nm (18Nm MAX.)

M12x1.5 TORQUE WITHOUT LUBRICATION NOMINAL 20Nm (24Nm MAX.)

M14x1.5 TORQUE WITHOUT LUBRICATION NOMINAL 24Nm (28Nm MAX.)

M16x1.5 TORQUE WITHOUT LUBRICATION NOMINAL 30Nm (35Nm MAX.)

FOR USE IN APPLICATION IN COMPRESSED AIR SYSTEMS IN COMMERCIAL VEHICLES :

- WITH COMPRESSED AIR ACC. JED-848

MATERIAL OF FITTING: CuZn

MATERIAL OF SEALS: EPDM

WORKING TEMPERATURE: -40 C/+100 C

WORKING PRESSURE: max. 12.5 bar

H - HEXAGON KEY WIDTH

General Specification: JED-334-1 , Size ISO 14405 LP

Further Technical Data:

Doc. Code: Sheet: To

General Tolerances JED-261

Class	1)	Range of Nominal Dimensions (± mm)					±3°
		≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400		
Fine	X	0.5	1.0	1.5	2.0		
Medium		1.0	2.0	3.0	4.0		
Coarse		2.0	3.5	5.0	6.5		

Tapped Holes acc. JED-152

1) Tolerance Class Applied Crossmarked

Copyright WABCO®

Date Signature

Drawn

2020-03-04 Balogo

Checked

2020-03-09 Szczulkowski

Expert

Szczulkowski

Mass

Scale

Material No.

see table

1:1

893 104 057 0

Size

CAD System

A 3

CREO

ECN-No.

Revision

Techn. Resp.

502083

3 x A

5790

Date of first issue: 2018-03-26

Doc.Code

Language

Sheet

053

EN

1/1


Replacement for

-

WABCO

Fitting

893 104 057 0



100mm