


Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzarne il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Toute Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modeles.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Controvention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.


Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadensersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

1	2	3	4	5	6	7	8		
A	B	C	D	E	F	G	H	J	
M22x1.5 tightening torque: 34 Nm (40 Nm)	M16x1.5 tightening torque: 30 Nm (35 Nm)	24	39	min. 10 Ⓐ	9	min Ø10	Hex. 28	with o-ring	

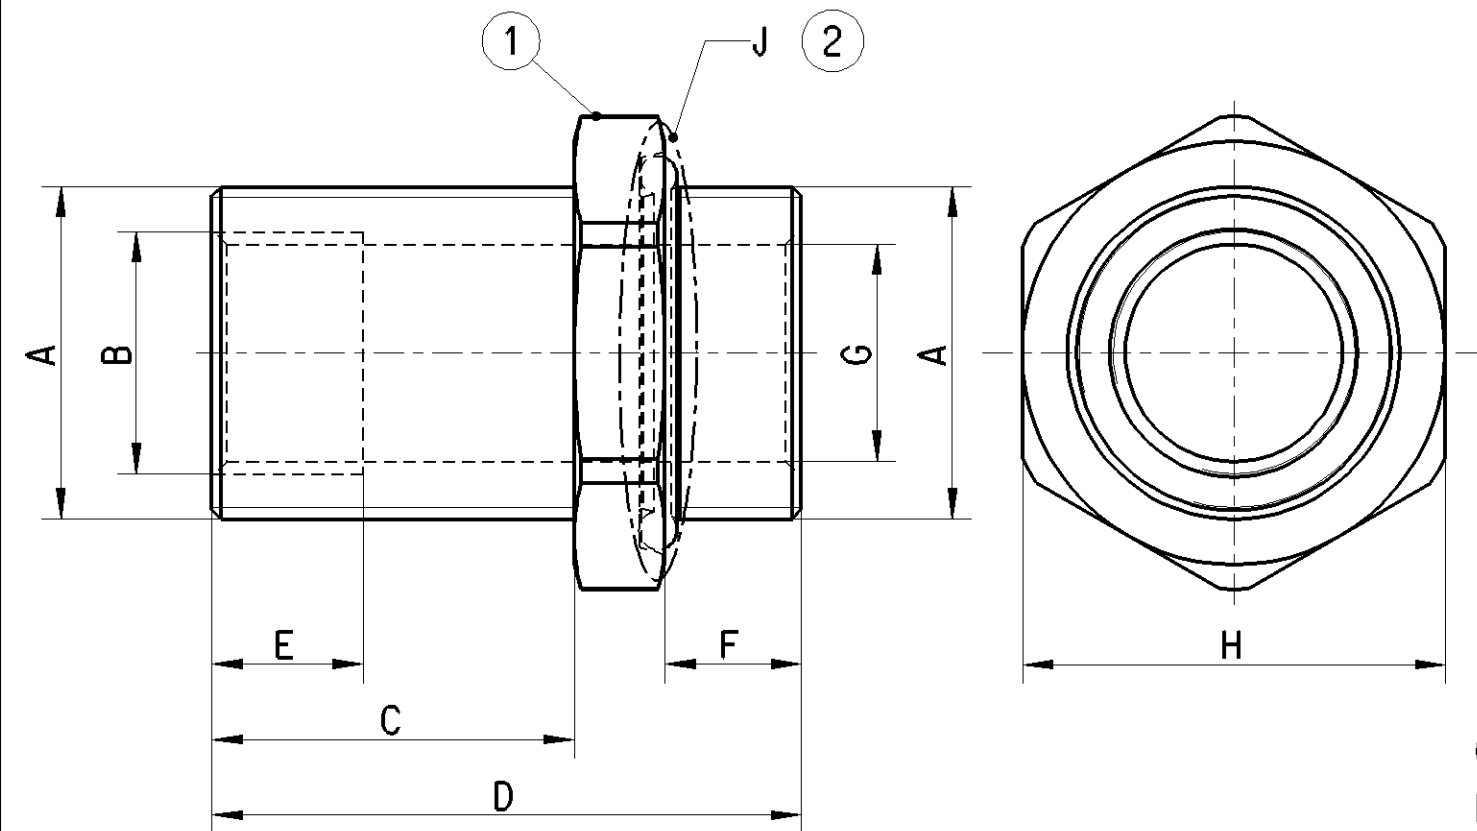


Cleanliness requirement:
No particles >1mm allowed acc. to mandatory standard:
JED-334 and JED-593
Area: for the whole part (Special agreements possible;
to be agreed with Product Engineering)
Material:
1 CuZn
2 EPDM
General Specification : JED-762 ; JED-622 ; JED-271 ; JED-220
Engineering related agreements with Supplier have to be mentioned in the "Release of Supplier"

For use in application in compressed air systems in commercial vehicles :
- with compressed air acc. JED-848
- at working conditions:
- -40 °C ... 100 °C
- max. 13 bar

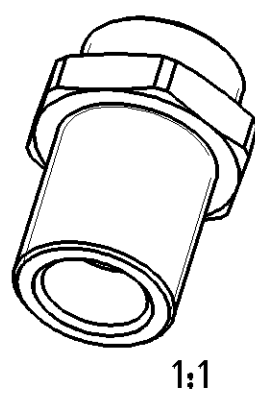

General Specification: ISO 8015, JED-334-1, Size ISO 14405 LP										Copyright WABCO®			WABCO Connector										
Further Technical Data:893 000 001 O, doc code 035										Date		Signature											
Doc. Code:				Sheet: To						Drawn													
				2021-09-15						Balogo													
General Tolerances JED-261										Checked													
				2021-09-29						Szczulkowski													
Range of nominal dimensions in mm										Dimensions in mm													
Class 1)		≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400			Mass		Scale		Material No.			Date of first issue: 2015-10-05								
Fine		X	±0.25	±0.5	±0.75			±1	0.086 kg		2:1 (1:1)		893 104 294 2			Doc.Code		Language		Sheet			
Medium			±0.5	±1	±1.5			±2	±3°		CAD System					005		EN		1/1			
Coarse			±1	±1.75	±2.5			±3.25															
Tapped Holes acc. JED-152										A 3		CREO				ECN-No.		Revision		Techn. Resp.		Replacement for	
1) Tolerance Class Applied Crossmarked														508367		2 x A		5790					

893 104 294 2



508367 2 x A 5790

100mm