Toute Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modeles.

Weitergabe sowie Vervielfaeltigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdruecklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzarne il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituira un evidente abuso e comportera il risar cimento dei danni subiti. E'fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Contravention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

<1> SAFETY CHARACTERISTICS	0
<2> SIGNIFICANT CHARACTERISTICS	0
<CI> CUSTOMER INTERFACE	0

A 8931048012
8938200054

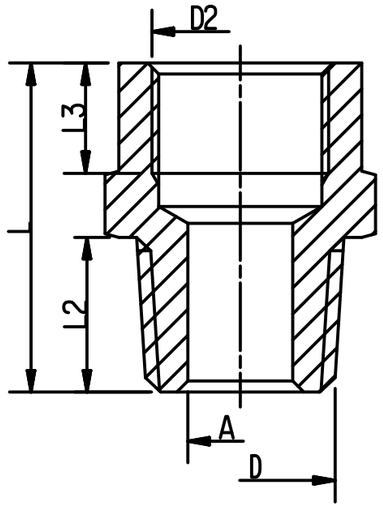

8932800042

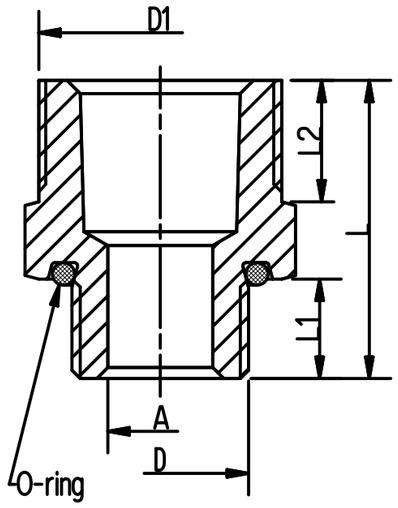

ZF PART NO.	A	D	D1	D2	L	L1	L2	L3	HW
Tolerance:	±0,25				±0,4	±0,25	±0,25	Min.	h11
8931048012	6	1/4"-18 NPTF	-	M12 x 1,5	28,8	-	14	10	18
A 8938200054	9,5	3/8" -18 NPTF	-	M16 x 1,5	29,8	-	14	10	22
A 8932800042	10	M16 x 1,5	M22x1,5	-	27	9	12	-	24

A TIGHTENING TORQUE: RECOMMENDED TORQUE WITHOUT LUBRICATION (MAX. TORQUE) RESPECT MAX. TORQUE OF COUNTER PART

M12x1.5 TORQUE WITHOUT LUBRICATION NOMINAL 20Nm (24Nm MAX.)

M16x1.5 TORQUE WITHOUT LUBRICATION NOMINAL 30Nm (35Nm MAX.)

M22x1.5 TORQUE WITHOUT LUBRICATION NOMINAL 34Nm (40Nm MAX.)

1/4" - 18 NTPF TORQUE WITHOUT LUBRICATION NOMINAL 24Nm (28Nm MAX.)

3/8" - 18 NTPF TORQUE WITHOUT LUBRICATION NOMINAL 32Nm (38Nm MAX.)

A CLEANLINESS REQUIREMENT:

NO PARTICLES >1MM ALLOWED ACC. TO MANDATORY STANDARD JED-334 AND JED-593

AREA: FOR THE WHOLE PART

GENERAL SPECIFICATION : JED-762 ; JED-622

FOR USE IN APPLICATION IN COMPRESSED AIR SYSTEMS IN COMMERCIAL VEHICLES :

- WITH COMPRESSED AIR ACC. JED-848

A MATERIAL OF FITTING: CuZn39Pb3
A MATERIAL OF SEALS: EPDM
WORKING TEMPERATURE: -40 C/+100 C
WORKING PRESSURE: 0 - 12,5 bar

A

General Specification: ISO 8015, JED-334-1, Size ISO 14405 LP						
Further Technical Data:						
Doc. Code:		Sheet:	To			
General Tolerances JED-261						
Class 1)		Range of nominal dimensions in mm ≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	∢
Fine	X	±0.5	±1	±1.5	±2	±3°
Medium		±1	±2	±3	±4	
Coarse		±2	±3.5	±5	±6.5	
Tapped Holes acc. JED-152						
1) Tolerance Class Applied Crossmarked						

Copyright ZF ®

Date	Signature
Drawn	
2024-04-11	Balaga
Checked	
2024-04-12	Bulaj

Dimensions in mm

ADAPTER

Mass	Scale	Material No.	Date of first issue: 2018-05-18		
0.039 kg	2:1	893 104 801 2	Doc.Code 005	Language EN	Sheet 1/1
Size A 3	CAD System CREO	ECN-No. 516738	Revision 8 x A	Techn. Resp. 5790	Replacement for -

100mm