



Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzarne il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Toute Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Controvention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Weitergabe sowie Vervielfaeltigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdruecklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

1	2	3			4		5		6		7		8
Part number	Part name	A	B	C	D	E	F	HW	Torque[Nm]	O-ring (A)	Weight [g] Theoretical		
Tolerance:				±0,2	±0,26		Min.	h11					
893 120 008 2	Hose nipple	M16x1.5	10	9	30±0.3	45±0.5	24.5	22	30(35)	15x2	[51]		
893 129 442 2	Hose nipple	M16x1.5	13	9	30	45±0.3	24.5	22	30(35)	15x2	[44]		

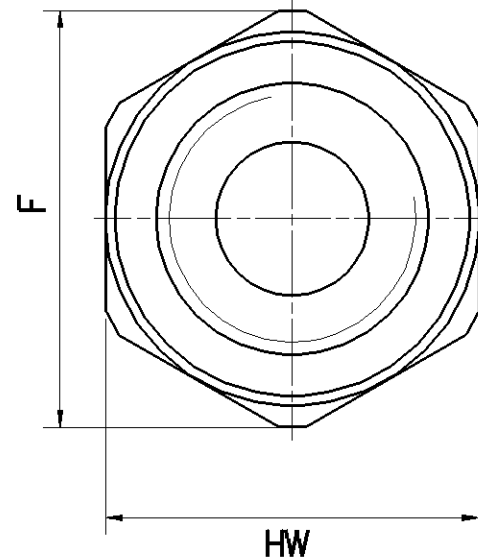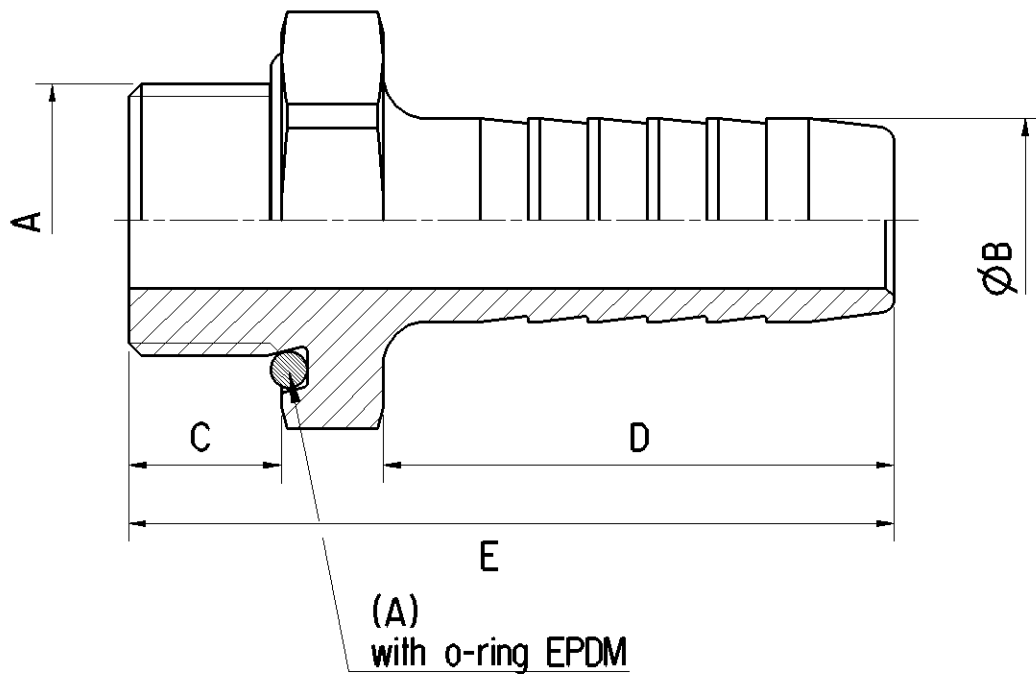

CLEANLINESS REQUIREMENT:

NO PARTICLES >1MM ALLOWED ACC. TO MANDATORY STANDARD JED-334 AND JED-593

AREA: FOR THE WHOLE PART (SPECIAL AGREEMENTS POSSIBLE, TO BE AGREED WITH PRODUCT ENGINEERING)



GENERAL SPECIFICATION : JED-762 ; JED-622 ; JED-220

ENGINEERING RELATED AGREEMENTS WITH SUPPLIER HAVE TO BE MENTIONED IN THE "RELEASE OF SUPPLIER"

TIGHTENING TORQUE: RECOMMENDED TORQUE WITHOUT LUBRICATION (MAX. TORQUE) RESPECT MAX. TORQUE OF COUNTER PART

FOR USE IN APPLICATION IN COMPRESSED AIR SYSTEMS IN COMMERCIAL VEHICLES :

- WITH COMPRESSED AIR ACC. JED-848



MATERIAL OF FITTING: CuZn
MATERIAL OF SEALS: EPDM
WORKING TEMPERATURE: -40°C...+100°C
WORKING PRESSURE: MAX 12,5 bar

General Specification: JED-334-1 , Size ISO 14405 LP							Copyright WABCO®		WABCO HOSE NIPPLE						
Further Technical Data:							Date						Signature		
Doc. Code:			Sheet:		To		Drawn								
General Tolerances JED-261							2018-09-18						Bulaj		
Class 1)		Range of Nominal Dimensions (± mm)					Checked		Szczulkowski						
		≤ 50		> 50 ≤ 180	> 180 ≤ 400	> 400	2018-09-18								
							Expert								
Fine	X	0.5	1.0	1.5	2.0	±3°	Mass	Scale	Material No.		Date of first issue: 2018-09-18				
Medium		1.0	2.0	3.0	4.0		see table KG	2:1 1:1	893 120 008 0		Doc.Code	Language	Sheet		
Coarse		2.0	3.5	5.0	6.5		Size	CAD System			053	EN	1/1		
Tapped Holes acc. JED-152							A 3		CREO		ECN-No.	Revision	Techn. Resp.	Replacement for	
1) Tolerance Class Applied Crossmarked											-	-	5790	-	

100mm