

Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Toutre Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Contravention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Weitergabe sowie Vervielfaeltigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdru cklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

1	2	3	4	5	6	7	8
A	B	C	D	E	F	G	TORQUE
Ø15.1 (P5)	M16x1.5	MIN. Ø9.5	29.5	9	14.5	HEX. 22	35N

CLEANLINESS REQUIREMENT:

CLASS: KOO ACCORDING TO JED-593

AREA: FOR THE WHOLE PART (SPECIAL AGREEMENTS POSSIBLE,
TO BE AGREED WITH PRODUCT ENGINEERING)

MATERIAL:


- 1 CuZn
- 2 STAINLESS STEEL
- 3 EPDM

GENERAL SPECIFICATION : JED-762 ; JED-622 ; JED-271 ; JED-220



ENGINEERING RELATED AGREEMENTS WITH SUPPLIER
HAVE TO BE MENTIONED IN THE "RELEASE OF SUPPLIER"

FOR USE IN APPLICATION IN COMPRESSED AIR SYSTEMS IN
COMMERCIAL VEHICLES:

- WITH POLYAMID OR HYTREL TUBES ACC. TO:
ISO7628; DIN74324, DIN73378
- WITH COMPRESSED AIR ACC.TO JED-848
- AT WORKING CONDITIONS (CONSIDER TUBE SPECIFICATION) :
 - -40 °C ... 100 °C (STORAGE 140 °C MAX. 2h)
 - MAX. 1250kPa (12.5 bar)

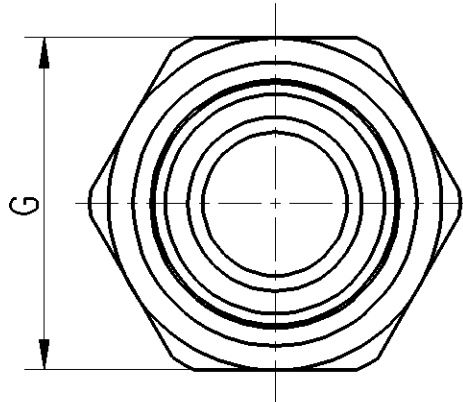

1:1

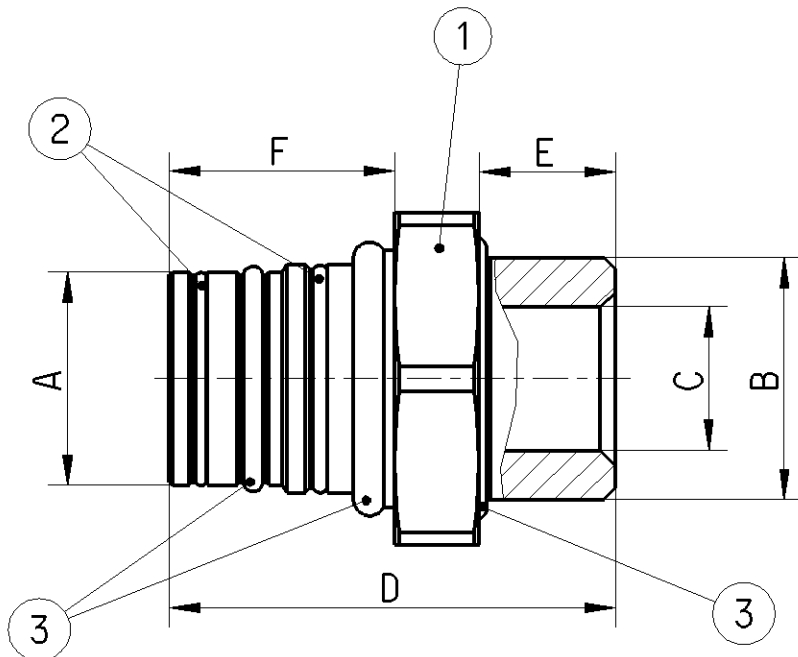

General Specification: JED-334-1 , Size ISO 14405 LP						Copyright WABCO®		WABCO Connector													
Further Technical Data:						Date						Signature									
Doc. Code:		Sheet:		To		Drawn						Nerling									
General Tolerances						Checked						Luechau									
Range of Nominal Dimensions (± mm)						Expert						Kaufmann									
Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400																
Fine	X	0.5	1.0	1.5	2.0	±3°		Mass		Scale		Material No.		Date of first issue: 2014-10-15							
Medium		1.0	2.0	3.0	4.0			0.033 KG		2:1 1:1		893 129 192 2				Doc.Code		Language		Sheet	
Coarse		2.0	3.5	5.0	6.5			Size		CAD System						005		EN		1/1	
Tapped Holes acc. -						A 3		CREO				ECN-No.		Revision		Techn. Resp.		Replacement for			
1) Tolerance Class Applied Crossmarked												-		-		5790					

drw: 893129192...005 / Version: -.5 / state: Under Review / mdf: 893129192...A01