


Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatto riserva di tutti i diritti derivanti da brevetti o modelli.

Touta Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Controvention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Weitergabe sowie Vervielfaeltigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdruerklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

1	2	3	4	5	6	7	8
A	B	C	D				
Hex.28	M22x1.5 tightening torque: 34 Nm (40 Nm)	26	11,5				

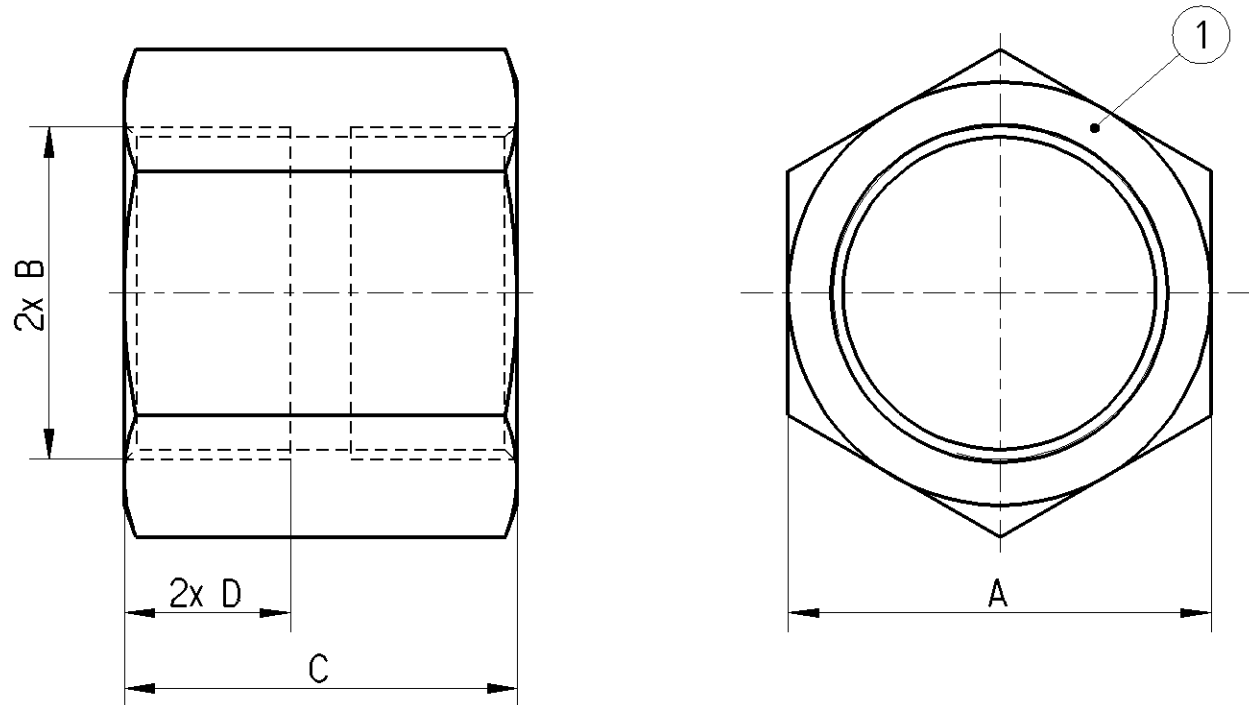

Cleanliness requirement:

No particles >1mm allowed acc. to mandatory standard:
JED-334 and JED-593

Area: for the whole part (Special agreements possible;
to be agreed with Product Engineering)

Material:

① CuZn

Suitable for use in air brake systems for commercial vehicles

General Specification : JED-762 ; JED-622 ; JED-271


Engineering related agreements with Supplier have to be mentioned in the "Release of Supplier"

For use in application in compressed air systems in commercial vehicles :

- with compressed air acc. JED-848

- at working conditions:

- -40 °C ... 100 °C
- max. 13 bar

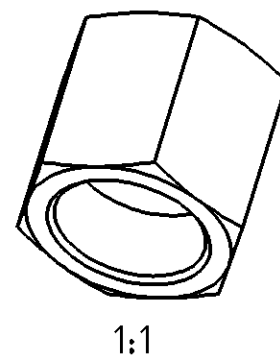

General Specification: JED-334-1 , Size ISO 14405 LP						Copyright WABCO®		WABCO Adapter M22						
Further Technical Data:						Date	Signature							
Doc. Code:			Sheet:			To							Drawn	
			General Tolerances JED-261			2015-10-07							Szczulkowski	
		Checked												
		2015-10-07				Luechau								
		Expert												
		Kaufmann												
Class 1)		Range of Nominal Dimensions (± mm)				Mass	Scale	Material No.			Date of first issue: 2015-10-07			
Fine	X	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	±3°	0.074 KG	2:1 (1:1)	893 209 073 4			Doc.Code	Language	Sheet
Medium		1.0	2.0	3.0	4.0							005	EN	1/1
Coarse		2.0	3.5	5.0	6.5									
Tapped Holes acc. JED-152						Size		CAD System	ECN-No.		Revision	Techn. Resp.	Replacement for	
1) Tolerance Class Applied Crossmarked						A 3		CREO	-		-	5790		

100mm