

Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatta riserva di tutti i diritti derivanti da brevetti o modelli.

Tout communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Contravention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Weitergabe sowie Vervielfaeltigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdruecklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

M22x1.5
tightening torque:
34 Nm
(40 Nm)

Ø15

10

23.5

Ø22

36

35

M16x1.5
tightening torque:
30 Nm
(35 Nm)


10

8,5

Hex. 28

HW 22

with o-ring

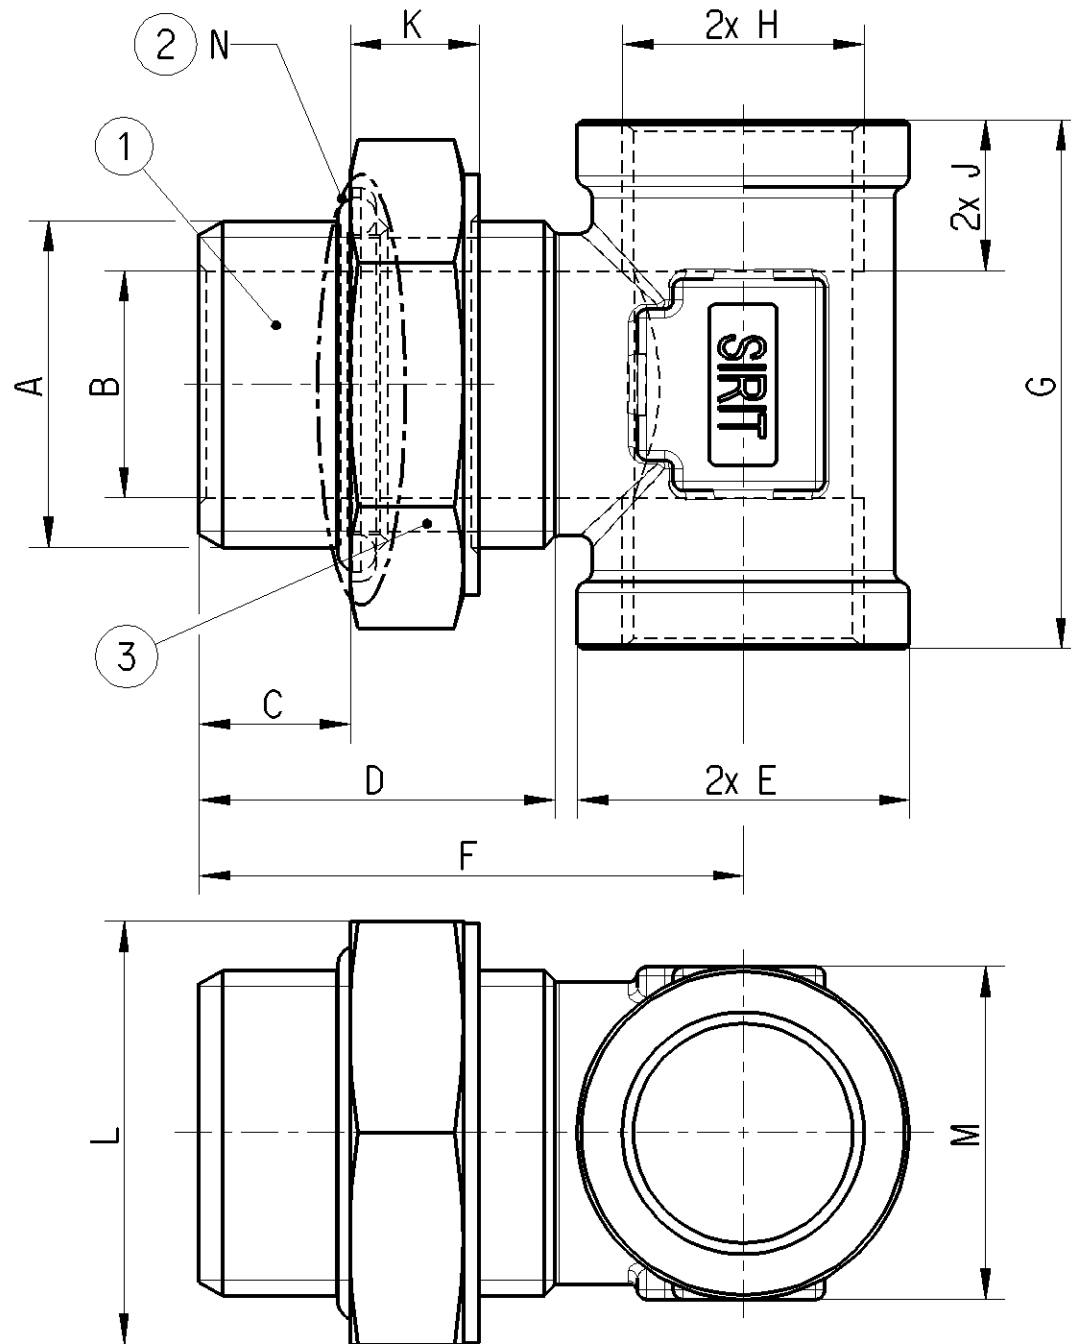

Cleanliness requirement:

No particles >1mm allowed acc. to mandatory standard:
JED-334 and JED-593

Area: for the whole part (Special agreements possible;
to be agreed with Product Engineering)

Material:

- 1 CuZn
- 2 EPDM
- 3 CuZn

General Specification : JED-762 ; JED-622 ; JED-271 ; JED-220


Engineering related agreements with Supplier have to be mentioned in the "Release of Supplier"

For use in application in compressed air systems in commercial vehicles :

- with compressed air acc. JED-848


- at working conditions:

- -40 °C ... 100 °C
- max. 13 bar



General Specification: JED-334-1 , Size ISO 14405 LP							Copyright WABCO®			WABCO Tee Piece										
Further Technical Data:							Date		Signature											
Doc. Code:			Sheet:		To		Drawn													
							2015-10-20		Szczutkowski											
General Tolerances JED-261							Checked													
							2015-10-20		Kaufmann											
							Expert													
							Kaufmann													
		Range of Nominal Dimensions (± mm)									Material No.			Date of first issue: 2015-10-20						
Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400		Mass		Scale		893 501 795 4			Doc.Code		Language		Sheet		
Fine	X	0.5	1.0	1.5	2.0		0.11 KG		2:1 (1:1)					005		EN		1/1		
Medium		1.0	2.0	3.0	4.0															
Coarse		2.0	3.5	5.0	6.5															
Tapped Holes acc. JED-152													ECN-No.		Revision		Techn. Resp.		Replacement for	
1) Tolerance Class Applied Crossmarked							A 3		CREO				-		-		5790			

893 501 795 4



100mm