



Non è permesso consegnare a terzi o riprodurre questo documento, né utilizzare il contenuto o renderlo comunque noto a terzi senza permesso scritto dalla WABCO. E' vietata espressamente la ristampa o l'uso non autorizzato senza permesso scritto dalla WABCO. Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse de la WABCO. Toute réimpression ou utilisation non autorisée sans la permission écrite de la WABCO est formellement interdite. Alle Rechte vorbehalten. Nachdruck, Vervielfältigung und Verbreitung, auch auszugsweise, ist ohne schriftliche Genehmigung der WABCO AG. This document is the subject of copyright. No part of this document may be reproduced without prior written permission from WABCO. All rights reserved. In the event of the grant of patent or registration of a utility model or design, this document is the subject of copyright.

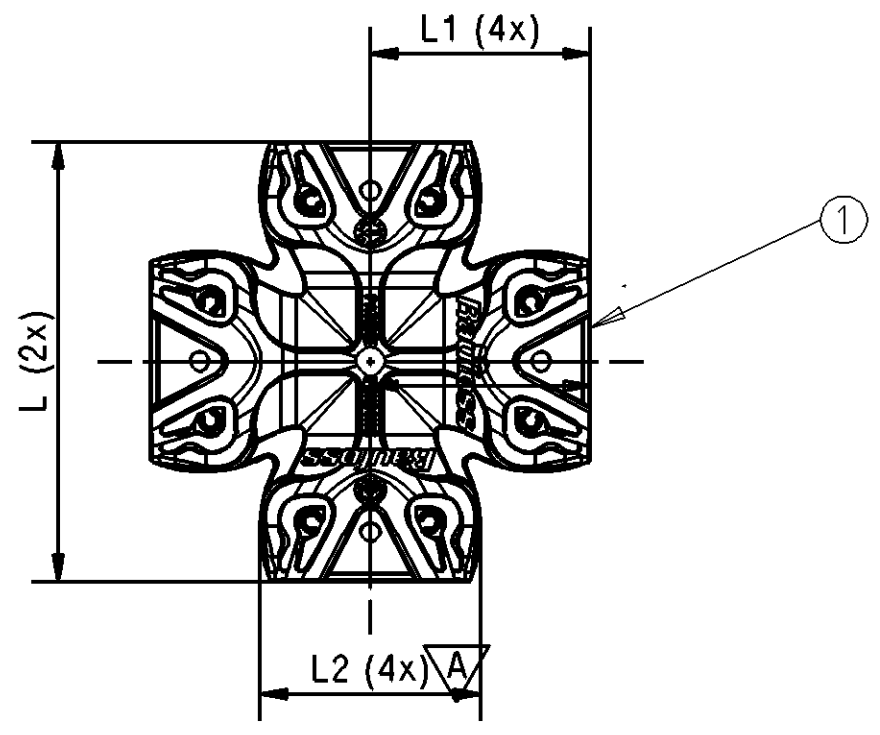

WABCO PART NUMBER	RAUFOSS CODE	SIZE	L	L1	L2	WEIGHT [g]
Tolerance			± 0,75			
8935500124	92050070	Regular	58,2	(29,1)	(29,2)	25
8935500134	92060070	Heavy Duty	68,2	(34,1)	(34,2)	40

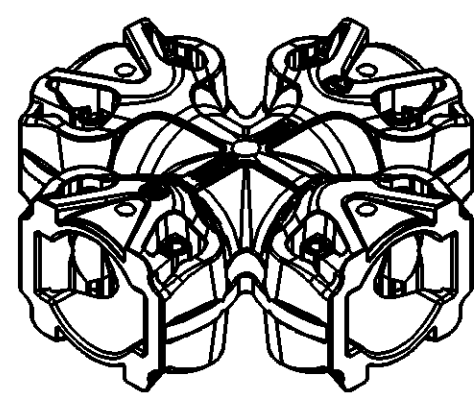

WORKING TEMPERATURE: -40°C/+100°C
WORKING PRESSURE: 0 - 12,5 bar
OPERATING MEDIUM: COMPRESSED AIR

RAUFLOSS ABC 4-way Cross Design record	Sik.nr./ Pos.no.		Gjenstand/Object/Dim.		Ant./No. pr. sett		Matr.		Dim./Vekt av emne/ Materialweight		Norm nr./no.		Anmerking/Note	
	Tgn./Drw.	EvMo	2010-11-23		Gen. ruhet/ roughness		Gen. toler.		Målestokk/ Scale		Ref. tegn./Ref. drawing			
	Ktrl./Ctrl.	JMD	2010-11-23		Erstatning/Replacement for:		Erstattet av/Replaced by:		<i>Raufoss</i> 001-1433-A Arkiv nr./File no. Sig.					
	Klr./Clr.													
	Gkj./App.	Gekr	2010-11-23											

Cleanliness requirement:
Class: K00 according JED-593
Area: for the whole part (Special agreements possible; to be agreed with Product Engineering)

No	Part	Material
1	BODY	PA

Raufoss ABC couplings can be used with polyamide (PA 6.10, PA 10.10, PA 10.12, PA 11, PA 12) or Hytrel tubing to one of the following standards:
- ISO 7628
- DIN 74324
- DIN 73378
- SAE J844

Peak-temperature up to +130 °C (pressure less, for a period of approximately 2 hours.)

Please take into consideration the max allowed tube operation pressure.

Raufoss ABC couplings from Kongsberg Automotive is approved and certified by: TÜV Nord

For any further specific requirements, applications of our product or support for technical solutions, please ask for individual consultation from Kongsberg Automotive, our subsidiary Kongsberg Raufoss Distribution SAS.

General Specification: JED-334-0 , Size ISO 14405-1 E

Further Technical Data: 893 000 001 0

Doc. Code: 035

Sheet: 1

General Tolerances JED-261

Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400
Fine	X	0.5	1.0	1.5	2.0
Medium		1.0	2.0	3.0	4.0
Coarse		2.0	3.5	5.0	6.5

 ±3° || Tapped Holes acc. - | | | | | |
| 1) Tolerance Class Applied Crossmarked | | | | | |

Copyright WABCO®

Date: 2013-08-28

Signature: Saravanan

Checked: 2013-09-12

Expert: Kaufmann

Mass: -

Scale: -

Material No.: 893 550 015 4

Date of first issue: -

Doc. Code: 053

Language: EN

Sheet: 1/1

ECN-No.: -

Revision: -

Techn. Resp.: -

Replacement for: -

WABCO

Cross Piece

A 2

Pro/E

100mm