


B



ETRT0-Standard V0-07-05
756-Vg8)

32

17.5

48 ±2

63

78

81

The drawing shows a 3-way cross connector with a central horizontal body and two vertical ports. The central body has a diameter of 32. The vertical ports have a diameter of 17.5. The total length of the connector is 81. The distance from the left end to the center of the cross is 78. The distance from the center of the cross to the right end is 63. The distance from the center of the cross to the right end of the vertical port is 48 ±2. The drawing includes a cross-section view of the right vertical port, showing internal threads and a seal. The label 'ETRT0-Standard V0-07-05 756-Vg8)' is located at the top left. The dimensions are indicated by arrows and numbers.

INSTALLATION CONDITION
* * EINBAUZUSTAND
ETAT D'INSTALLATION
STATO DI INSTALLAZIONE

TORQUE :
ANZUGSMOMENT : M = 0,9 ±0.1 Nm
COUPLE DE SERRAGE :
COPPIA DI SERRAGGIO :

PIPE
ROHR 5x1 DIN 73378 - PA11w sw LT
TUBE
TUBO

(NOT SUPPLIED)
(GEOHRT NICHT ZUM LIEFERUMFANG)
(NON FUORNI)
(NON SI FORNISCONO)

TECHNICAL DATA,
TECHNISCHE DATEN,
CARACTERISTIQUES
TECHNIQUES, CARATTERISTICHE TECNICHE.

WORKING MEDIUM : AIR
ARBEITSMEDIUM : LUFT
FLUIDE D'UTILISATION : AIR
FLUIDO DI ESERCIZIO : ARIA

THERMAL RANGE OF APPLICATION :
THERMISCHER ANWENDUNGSBEREICH : -40° C....+70° C
PLAGE DE TEMPERATURE EN UTILISATION:
CAMPO TERMICO DI APPLICAZIONE :



SHORT TERM RESISTANCE TO HEAD :
 KURZZEITIGE WAERMEBESTAENDIGKEIT : +110°C
 RESISTANCE A LA CHALEUR A COURTE DUREE: (p_e = 0 bar, MAX.1h)
 RESISTANZA AL CALORE BREVE TEMPO SOLO :

STORAGE TEMPERATURE FROM :
LAGERTEMPORATUR VON : -40° C...+90° C
TEMPERATURE DE MAGASINAGE DE :
TEMPERATURA DELL'IMMAGAZZINAMENTO DA:

WORKING PRESSURE :
BETRIEBSDRUCK : $p_e = 0 \dots 11 \text{ bar}$
PRESSION DE SERVICE :
PRESSIONE D'ESERCIZIO:

OPENING PRESSURE/TEST CONNECTION :
 OEFFNUNGSDRUCK/PRUEFANSCHLUSS : $p_e = 3.5 \pm 1.5 \text{ bar}$
 PRESSION D'OUVERTURE/RACCORD D'EPREUVE :
 PRESSIONE D'APERTURA/RACCORDO PER PROVE :

INSTALLATION POSITION : OPTIONAL
EINBAULAGE : BELIEBIG
POSITION D'INSTALLATION : QUELCONQUE
POSIZIONE DI MONTAGGIO A : SCELTA

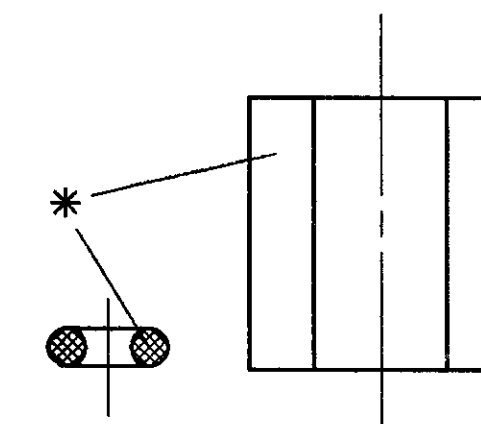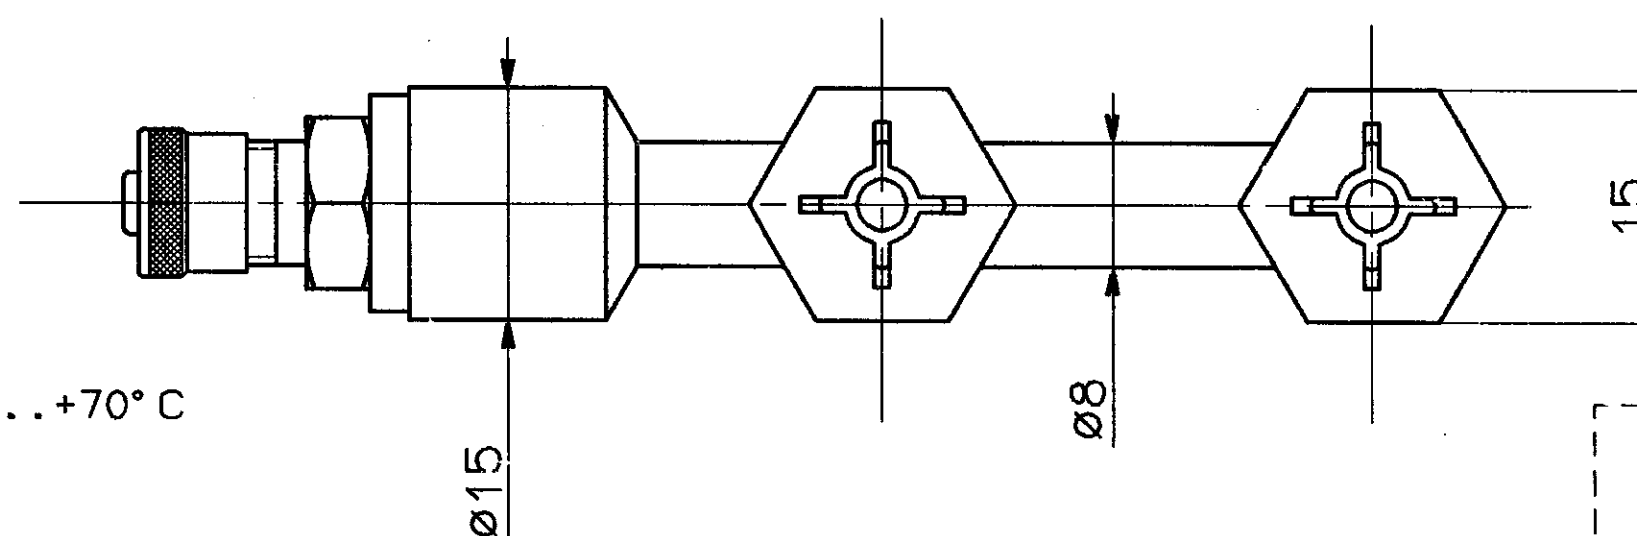

FURTHER TECHNICAL DATA SEE									COPYRIGHT	WABCO		CLAYTON DEWANDRE
IDENTIFICATION NO.: 893 750 130 2									DATE	SIGNATURE		
CODE FOR DOCUMENT: 535 SHEET: 1/4 TO 4/4									DRAWN			
GENERAL TOLERANCES									89-07-17 BRUNS			
CLASS	RANGE OF NOMINAL DIMENSIONS (± mm)					★			CHECKED		DIVIDER	
	1)	≤50	> 50 ≤180	>180 ≤400	>400				89-07-21 GRADER		VERTEILERSTUECK	
I		0,5	1,0	1,5	2,0	± 3*			STANDARDIZATION		PIECE DE REPARTITION	
II	×	1,0	2,0	3,0	4,0				89-07-21 THIELE		DIVISORE	
III		2,0	3,5	5,0	6,5							
TAPPED HOLES ACC. ISO 4039 / JED-152									MASS	SCALE	PRODUCT IDENTIFICATION NO.	
1) TOLERANCE CLASS APPLIED CROSSMARKED						DCN-NO.	REV.	DATE	0.03 kg	2:1 1:1	893 750 131 2	
									SIZE	T.R.I.	CODE FOR DOCUMENT SHEET	
									A 2	140	605 1/1	
											CODE F.PROD.-GROUP	CODE FOR SHAPE
											626	REPLACEMENT FOR

— 100m

EXPERT CODE

7	1	8
---	---	---

0	1	2
---	---	---