



Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituisce un evidente abuso e comportera il risarcimento dei danni subiti. E' fatto riserva di tutti i diritti derivanti da brevetti o modelli.

Toute Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Controvention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Weitergabe sowie Vervielfaeltigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdruecklich zugestanden. Zuwiderhandlungen stellen einen offensichtlichen Missbrauch dar und verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

1	2	3	4	5	6	7	8
A	B	C	D	E	F		
for Tube $\varnothing 10 \times 1,25$	$\varnothing 19,7^{+0,1}_{-0,05}$ ⓑ	23	24 Push in length	51,5	Hex.20 $^{+0}_{-0,2}$ ⓑ		

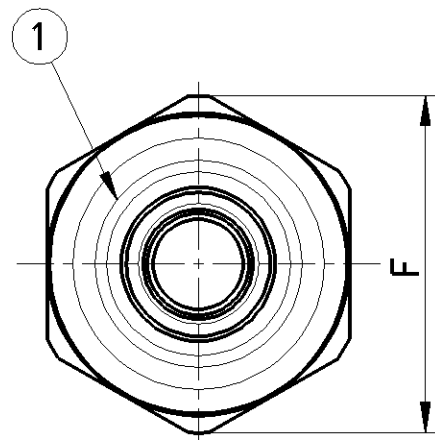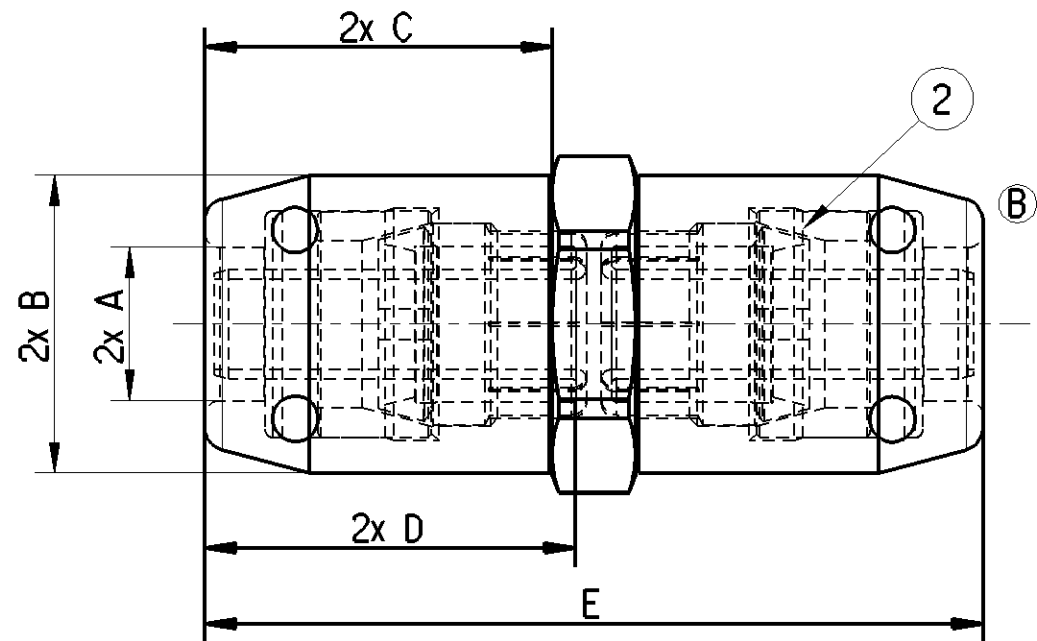

Cleanliness requirement:

No particles >1mm allowed acc. to mandatory standard:
JED-334 and JED-593

Area: for the whole part (Special agreements possible;
to be agreed with Product Engineering)

Material:

- 1 CuZn
- 2 PA/EPDM (inner components)

General Specification : JED-762 ; JED-622 ; JED-220


Engineering related agreements with Supplier have to be mentioned in the "Release of Supplier"

For use in application in air brake system in commercial vehicles :

- with compressed air acc. JED-848

- at working conditions:

- -40 °C ... 100 °C
- max. 15 bar
ⓑ

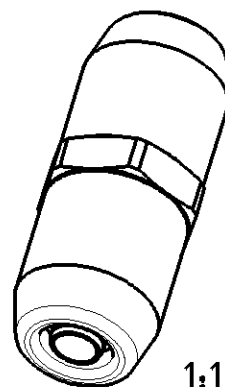

General Specification: JED-334-1 , Size ISO 14405 LP						Copyright WABCO®			WABCO Screw-in fitting																													
Further Technical Data:						Date		Signature																														
Doc. Code:		Sheet:		To		Drawn																																
						2020-11-20		Balogo																														
General Tolerances JED-261						Checked																																
						2021-01-13		Szczulkowski																														
						Expert																																
						Szczulkowski																																
Range of Nominal Dimensions (± mm) <table><tr><td>Class</td><td>1)</td><td>≤ 50</td><td>> 50 ≤ 180</td><td>> 180 ≤ 400</td><td>> 400</td><td rowspan="4"></td></tr><tr><td>Fine</td><td>X</td><td>0.5</td><td>1.0</td><td>1.5</td><td>2.0</td></tr><tr><td>Medium</td><td></td><td>1.0</td><td>2.0</td><td>3.0</td><td>4.0</td></tr><tr><td>Coarse</td><td></td><td>2.0</td><td>3.5</td><td>5.0</td><td>6.5</td></tr></table> ±3°						Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400		Fine	X	0.5	1.0	1.5	2.0	Medium		1.0	2.0	3.0	4.0	Coarse		2.0	3.5	5.0	6.5	Mass		Scale		Material No.			
						Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400																											
						Fine	X	0.5	1.0	1.5	2.0																											
						Medium		1.0	2.0	3.0	4.0																											
Coarse		2.0	3.5	5.0	6.5																																	
						0.070 KG		2:1 (1:1)		893 800 046 0																												
						Size		CAD System																														
Tapped Holes acc. -						A 3		CREO				ECN-No.		Revision		Techn. Resp.		Date of first issue: 2015-12-04																				
1) Tolerance Class Applied Crossmarked												503490		4 x B		5790		Doc.Code		Language		Sheet																
																		005		EN		1/1																